


LED Site / Warehouse / Garage Series



Stock No.	Product Description
LED-8015	PT-120-22-128-DL (Daylight)

Description:

Fully encapsulated, 100 - 240 Volt, E39/E40 mounting that integrates energy saving LED technology into a powerful yet energy saving SMD LED 'low bay / garage' lamp.

Available in Daylight (DL).

- 22 Watt
- 100 - 240 Volt operation
- Daylight DL (5000K)
- 1500 lumens
- 128 on-board LED SMDs
- 360° illumination plus top light
- Up to 35,000 hour lamp life
- Minimal heat output
- Not dimmable
- 3 year warranty

Applications:


LED Site / Warehouse / Garage Series lamps can impact energy usage and costs in a major way for communities and housing developments with minimal to no maintenance costs thanks to the up to 35,000 hour lamp life.

- Site / Roadway / Post Top
- Wall packs (where applicable)
- Security lighting
- Parks and quads
- Municipal lighting

Packaging:

Master-pack: 50 each

NOTE: When retrofitting LED to HID fixture, ballast must be by-passed when present. Eliminating the ballast saves additional costs related to maintenance, energy consumption and performance. Additionally, by-passing ballast will insure no RFI interference.

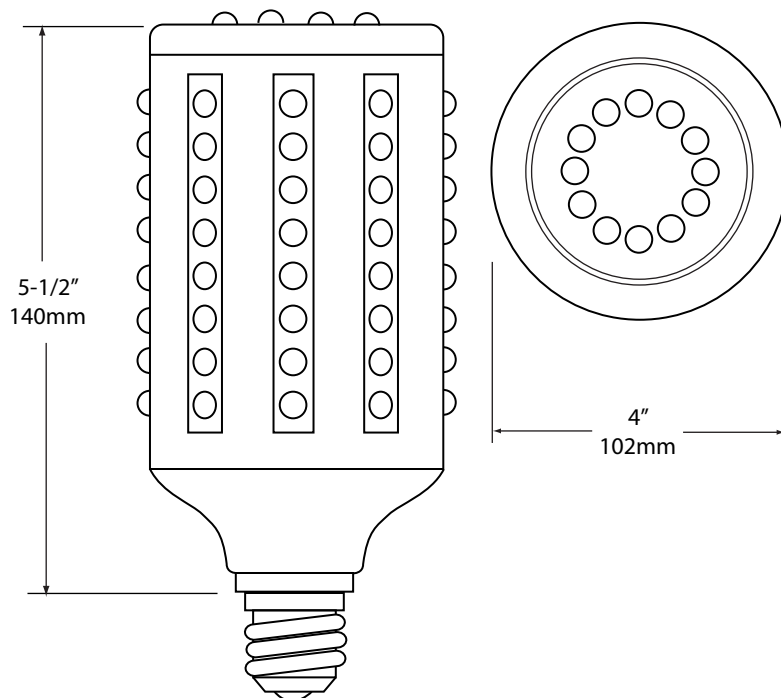

Technical Specifications:

Bulb Type:	Cylindrical	Mounting:	E27
Bulb Material:	PBT Plastic Base	Replaces:	100W HPS
UV:	None	Life Time:	Up to 35,000 Hrs.
Output Power:	22W	Input Voltage:	AC 100 - 240V
Lumens:	1500	Beam Angle:	360°
Dimensions:	4" x 5-1/2" 100mm x 140mm	Kelvin Temp.:	(DL) 5000K
Lumen per Watt:	65	LEDs:	128
Frequency:	47 - 63Hz	Mercury:	None
		CRI:	75

NOTE: Light Emitting Designs is providing this information to the general public. Please note that all products contained herein are trademarked, copyrighted, and/or have patents pending. Any use of these designs is strictly prohibited without prior written consent. Light Emitting Designs protects its proprietary information vigorously in the courts of the United States of America.



108 S. Wynstone Park Drive • Suite 103 • N. Barrington, IL 60010 • (847) 380-3540
 FAX: (847) 380-3542 www.led-llc.com Specs subject to change without notice. 060110_LED8015