




108 S.Wynstone Park Drive Suite 103
North Barrington, IL 60010

T8 LED Wiring Schematic ~ 4' (48") & 2' (24")

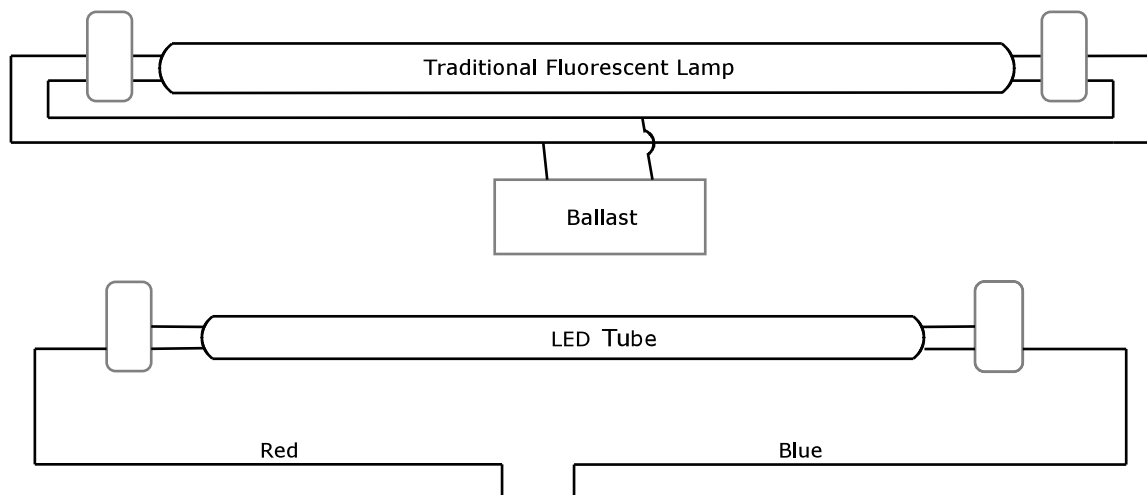

- 1) Make sure that the electrical power to the fixture is disconnected prior to any retrofit.
- 2) Disconnect incoming leads from ballast. Dispose of ballast in accordance to local recycling laws.
- 3) Cut one of the RED wires going to either side bi-pin connector and cut the BLUE wire going to the side connector that still has the RED wire connected so that one side bi-pin tombstone connector will have the BLUE wire live and the other side will have the RED wire live. You might have to connect multiple bi-pin connectors on each side with jumper wires so that all on each side are fully connected.
- 4) Connect the RED wire to either HOT or NEUTRAL from panel and connect the BLUE wire to the remaining wire from panel.

*The actual wires might not be colored as stated above.

Warning ~ Over voltage will damage LED lamps immediately and void any warranty.
Check and confirm voltage output and regulation prior to LED install.