

TEMPORARY WORK SITE LIGHTS

INSTALLATION AND USER'S GUIDE

LED-9009-100-5C + LED-9009-100-5F | 100W

PRIOR TO INSTALLATION, PLEASE READ THE ENTIRE INSTALLATION INSTRUCTIONS

SUITABLE FOR USE IN DRY OR DAMP LOCATIONS.

TO REDUCE RISK OF ELECTRIC SHOCK AND FIRE, DO NOT CONNECT OTHER EQUIPMENT OR DEVICES TO THE LIGHT STRING.


DO NOT MODIFY OR CUT ANY CABLES, HOUSINGS OR LAMPS.

NOT FOR USE IN ENVIRONMENTS WHERE EXPLOSIVE OR CORROSIVE GASES ARE PRESENT.

THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS.

WORK LIGHTS COME WITH A 5 YEAR WARRANTY AGAINST MANUFACTURING DEFECTS.

THIS WARRANTY DOES NOT COVER PHYSICAL DAMAGE OR IMPROPER OPERATION.

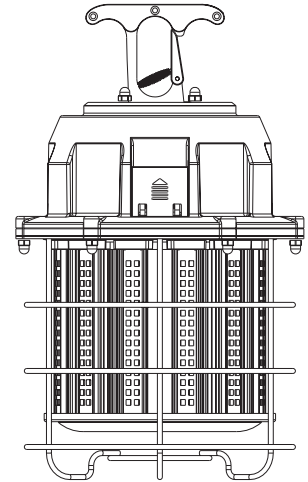

INSTALLATION REQUIREMENTS

MODEL	INPUT VOLTAGE	POWER CONSUMPTION	LUMEN OUTPUT	IP RATING	DAISY CHAIN	LAMP SIZE
LED-9009-100-5C	120 VAC 50/60 HZ	100W	12000	IP64	UP TO 6 LIGHTS	6.5" x 11.5"
LED-9009-100-5F	120 VAC 50/60 HZ	100W	9500	IP64	UP TO 6 LIGHTS	6.5" x 11.5"

INSTALLATION INSTRUCTIONS

1. Ensure that the power supply provides 120VAC, and has adequate capacity for the lights that will be installed. Do not connect the lights to the power source until they are mounted in the desired locations.
2. Position lights where desired and connect power to lights in a daisy chain arrangement. If attaching to an overhead pipe or support, please ensure that it has adequate strength to support the lights. Use the built in mounting hook or a strong cable tie, chain or wire to securely fasten the light to the overhead support.

After mounting the lights, please ensure that:

- Lights are clear of any flammable materials.
 - Lights and cables are clear of anything that may cause damage such as sharp objects, abrasive objects and impact.
 - Lights and cable are clear of personnel or equipment that may cause damage or injury.
 - Lamp cords are safely mounted and have some slack to allow for movement and to ensure cords are not under tension.
3. When all lights are securely mounted, confirm that the power draw will be less than 600 watts.
 4. Plug in the power cable to confirm that lights are operating correctly.

INSTALLATION NOTES

- PLEASE DO NOT CUT, DISASSEMBLE OR DISCONNECT THE LIGHTS, HOUSINGS OR WIRING.
- WHEN CONNECTING THE LIGHTS IN A DAISY CHAIN MANNER, THE TOTAL POWER DRAW OF THE STRAND SHALL BE LESS THAN 600 WATTS.
- USE CAUTION WHEN HANDLING THE LIGHTS. TURN OFF OR DISCONNECT POWER TO LIGHTS BEFORE HANDLING LIGHTS.
- DO NOT CONNECT OTHER LOADS SUCH AS POWER TOOLS, APPLIANCES OR SPACE HEATERS TO THE LIGHT STRING.



LIGHT EFFICIENT DESIGN 847.380.3540 • led-llc.com