


LED Site / Warehouse / Garage Series



Stock No. **Product Description**
LED-8050 **HB-120/277-100-1-DL (Daylight)**

Description:

Fully encapsulated, 100 - 277 Volt, hardwire mounting that integrates energy saving LED technology into a powerful yet energy saving SMD LED high bay lamp. Available in Daylight (DL).

- 100 Watt
- 100 - 277 Volt operation
- Daylight DL (5000K)
- 7000 lumens
- 1 on-board high power SMD LED
- Minimal heat output
- Dimmable
- IP65 PF>90
- 5 year warranty

Applications:

LED Site / Warehouse / Garage Series lamps can impact energy usage and costs in a major way for communities and housing developments with minimal to no maintenance costs thanks to the up to 50,000 hour lamp life.

- Site / Warehouse / Garage
- Security lighting
- Municipal interior lighting

Installation:


Quick and easy to install. Attach hook to top of fixture and hang from pre-installed ceiling hook. Fixture is pre-lamped (LED light engine) with pre-wired LED drivers. No need to open fixture, no removal of parts, no replacement of luminaires. Pendant or ceiling through-wire mounting. Mounting box should be properly installed to accept weight of fixture. High Bays are recommended for ceiling heights of 18 to 40 feet.

Spacing to Mounting Height Ratio:

Spacing to mounting height ratio (S/MH) determines the optimal spacing between fixture centers for uniform lighting. If the spacing between fixtures exceeds the optimal spacing determined with the S/MH ratio, then shadowing may occur on the work plane. All indoor LED industrial fixtures have a S/MH ratio. Optimal spacing is calculated by multiplying the S/MH ratio by the mounting height. For ex: if S/MH ratio is 1.5 and the mounting height is 15 ft., then the distance between fixtures should not exceed 1.5x15 or 22.5 ft.

Packaging:

Master pack: 1 each

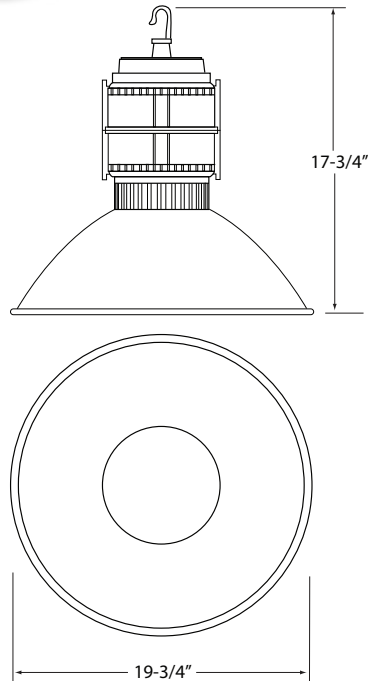

Technical Specifications:

Bulb Type:	Site/Warehouse/Garage	Mounting:	Pendant Hook w/ 6' cord
Bulb Material:	Aluminum / Acrylic	Replaces:	250W HID
UV:	None	Life Time:	Up to 50,000 hrs.
Output Power:	100W	Input Voltage:	AC 100 - 277V
Lumens:	7000	Beam Angle:	120°
Dimensions:	17-3/4"H x 19-3/4"W shade	Kelvin Temp:	(DL) 5000K
Net Weight:	4 KG	Lumens / Watt:	70
LEDs:	1 High Power	Frequency:	50 - 60 Hz.
Mercury:	None	CRI:	80

Note: All specification information falls within a ± 2% range



NOTE: Light Emitting Designs is providing this information to the general public. Please note that all products contained herein are trademarked, copyrighted, and/or have patents pending. Any use of these designs is strictly prohibited without prior written consent. Light Emitting Designs protects its proprietary information vigorously in the courts of the United States of America.

108 S. Wynstone Park Drive • Suite 103 • N. Barrington, IL 60010 • (847) 380-3540
 FAX: (847) 380-3542 www.led-llc.com Specs subject to change without notice. 061610_LED-8050