



Light Efficient Design

RemPhos



Screw-In
Retrofits



Pin-Base
Retrofits



Retrofit Kits



Fixtures



Work Lights



Solar Lights



Light Efficient Design

RemPhos

For over ten years, Light Efficient Design has maintained its focus on growing the LED retrofit category. Boasting the installation of millions of LED retrofits to date, Light Efficient Design is proud to be the industry leader in screw-in LED retrofit technology providing the highest quality and broadest product line on the market. Today, we not only offer you *choices* in retrofit technologies, including retrofit kits and pin base, but have expanded our product offerings to include feature-rich innovative LED fixtures from RemPhos, and first-to-market speciality LED solutions.

Our drive to be the best powers you to energy-smart, LED lighting solutions.

Table of Contents

Introduction to Light Efficient Design.....	2-3
Accessories.....	2
Screw-In Retrofits	
Shoe Box / Wall Pack.....	4-5
High Bay.....	6-7
Low Bay.....	8
Recessed Can.....	9
Post Top.....	10-11
Bollard.....	12-13
SOX.....	14
Hazardous Location.....	15
Pin-Base Retrofits	
PL.....	16-17
T8.....	18-19
Retrofit Kits	20-23
LED Fixtures	24-28
Work Lights	29
Solar Lights	
Solar.....	30-31
Light Efficient Design Representatives	32

ACCESSORIES SPECIFICATIONS

DESCRIPTION	MODEL #	TYPE	ENCLOSURE	NOMINAL DISCHARGE CURRENT	STRIKE RATING	DIMENSIONS
SURGE ARRESTORS	SPD-277P-10KA-EC-1	Pacific Electric 10kA surge arrester, 120-277V , series with thermal fuse, 5 year limited manufacturer's warranty	Round IP65	10,000A	1@10kA 2@6.5kA 15@3kA 110@1.5kA	2.5" x 1.4"
	SPD-347P-10KA	Pacific Electric 10kA surge arrester, 120-347V , series with thermal fuse, 5 year limited manufacturer's warranty	Round IP67			

DESCRIPTION	MODEL #	TYPE	MAX WATTAGE	INPUT/OUTPUT VOLTAGE	THD	POWER FACTOR	DIMENSIONS
STEP DOWN TRANSFORMERS	MTM04506227C	450VA Stepdown transformer	400W	480/347V in 240V out	3.4% 3.8%	0.99	6.5" x 3.2" x 1.9"
	MTM01606227C	160VA Stepdown transformer	150W	480/347V in 240V out	4.3% 4.1%	0.99	6.5" x 3.2" x 1.9"
	MTM00506224C	50VA Stepdown transformer	45W	480/347V in 240V out	6.2% 6.7%	0.98 0.97	4.8" x 1.9" x 1.6"

Sample Program

Try our LED retrofits in your project with no risk. Sample quantities* are available with 60-day terms, and can be returned in original cartons within 60 days. No restocking fee, no questions asked. That's our "try before rollout" guarantee!

* Up to 4 pieces

Powering the Switch to LED

Light Efficient Design continues to be the leader in commercial LED lighting transformation through our strategic vision to bring the best LED technology to...

ANY fixture...
ANY building...
ANYWHERE!

And now, we offer even greater flexibility with leading-edge design, innovation and thoughtful technology with LED solutions from

RemPhos
lighting on target



Screw-In Retrofits



Pin-Base Retrofits



Retrofit Kits



Fixtures



Work Lights



Solar Lights

We serve...



From...



With...




SHOE BOX / WALL PACK



Ballast Bypass—Internal Driver

TYPE B

- ▶ All models rotate easily once secured tightly in sockets
- ▶ Pinpoint directional light so no lumens are lost in the box



All models have Type V optics unless otherwise noted



30W
LED-8087E

Replaces up to 100W

Edison or Mogul base



50W
LED-8088E-G4

Replaces up to 175W

Edison or Mogul base



80W
LED-8089M-G4

Replaces up to 250W

Mogul base

G4 Model Coming Soon!



110W
LED-8090M-G4

Replaces up to 400W

Mogul base



110W
LED-8090M-G4-T3

Replaces up to 400W

Mogul base
Type III optics



110W
LED-8090M-G4-T4

Replaces up to 400W

Mogul base
Type IV optics



110W
LED-8090M-G4-DIM

Replaces up to 400W

Mogul base
Motion sensor

(LED-8089 included)

Ballast Compatible—Plug 'n Play

TYPE A

- ▶ Compatible with pulse or probe start magnetic metal halide ballasts
- ▶ Easiest to install—simply screw into existing socket



80W
LED-8089M-MHBC

Replaces 250W and 320W
Mogul base



120W
LED-8090M-MHBC

Replaces 320W and 400W
Mogul base



50W
LED-8088E-MHBC

Replaces 175W and 250W
Edison base



50W
LED-8088M-MHBC

Replaces 175W and 250W
Mogul base



SPECIFICATIONS

Ballast Bypass TYPE B										
DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	CLASSIFIED	DIMENSIONS
LED-8087E 30W	LED-8087E30-A		3477	100W	30W	E26 Edison	3000K	✓		6" x 2.8"
	LED-8087E40-A	LED-8087E40C-A	4171				4000K	✓		
	LED-8087E57-A	LED-8087E57C-A	4225				5700K	✓		
LED-8087M 30W	LED-8087M30-A		3477	100W	30W	E39 Mogul	3000K	✓	✓	6.7" x 2.8"
	LED-8087M40-A	LED-8087M40C-A	4171				4000K	✓	✓	
	LED-8087M57-A	LED-8087M57C-A	4225				5700K	✓	✓	
LED-8088E G4 50W	LED-8088E30-G4	LED-8088E30C-G4	6915	175W	50W	E26 Edison	3000K	✓		7.9" x 3.8"
	LED-8088E40-G4	LED-8088E40C-G4	6460				4000K	✓		
	LED-8088E50-G4	LED-8088E50C-G4	7250				5000K	✓		
LED-8088M G4 50W	LED-8088M30-G4	LED-8088M30C-G4	6915	175W	50W	EX39 Mogul	3000K	✓	✓	8.5" x 3.8"
	LED-8088M40-G4	LED-8088M40C-G4	6460				4000K	✓	✓	
	LED-8088M50-G4	LED-8088M50C-G4	7250				5000K	✓	✓	
LED-8089M G4 80W	LED-8089M30-G4	LED-8089M30C-G4	12090	250W	80W	EX39 Mogul	3000K	✓	✓	11.4" x 4.3"
	LED-8089M40-G4	LED-8089M40C-G4	12010				4000K	✓	✓	
	LED-8089M50-G4	LED-8089M50C-G4	11655				5000K	✓	✓	
LED-8090M G4 110W	LED-8090M30-G4	LED-8090M30C-G4	15745	400W	110W	EX39 Mogul	3000K	✓	✓	11.4" x 4.3"
	LED-8090M40-G4	LED-8090M40C-G4	15430				4000K	✓	✓	
	LED-8090M50-G4	LED-8090M50C-G4	14570				5000K	✓	✓	
LED-8090M G4-T3 110W	LED-8090M40-G4-T3	LED-8090M40C-G4-T3	12630	400W	110W	EX39 Mogul	4000K	✓	✓	11.4" x 4.3"
	LED-8090M50-G4-T3	LED-8090M50C-G4-T3	12840				5000K	✓	✓	
LED-8090M G4-T4 110W	LED-8090M40-G4-T4	LED-8090M40C-G4-T4	12165	400W	110W	EX39 Mogul	4000K	✓	✓	11.4" x 4.3"
	LED-8090M50-G4-T4	LED-8090M50C-G4-T4	12780				5000K	✓	✓	
LED-8090M G4-DIM 110W	LED-8090M40-G4-DIM	LED-8090M40C-G4-DIM	15430	400W	110W	EX39 Mogul	4000K	✓	✓	11.4" x 4.3"
	LED-8090M50-G4-DIM	LED-8090M50C-G4-DIM	14570				5000K	✓	✓	

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY



ON ALL MODELS



Step-down transformers available for 480V applications

see page 2

Ballast Compatible TYPE A									
DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	CLASSIFIED	DIMENSIONS
LED-8088E 50W	LED-8088E40-MHBC	5188	250W	50W	E26 Edison	4000K	✓		7.9" x 3.8"
	LED-8088E57-MHBC	6282				5700K	✓		
LED-8088M 50W	LED-8088M40-MHBC	5188	250W	50W	E39 Mogul	4000K	✓		8.5" x 3.8"
	LED-8088M57-MHBC	6282				5700K	✓		
LED-8089M 80W	LED-8089M40-MHBC	7941	320W	80W	E39 Mogul	4000K	✓		11.4" x 4.3"
	LED-8089M50-MHBC	7635				5000K	✓		
LED-8090M 120W	LED-8090M40-MHBC	9929	400W	120W	E39 Mogul	4000K	✓		11.4" x 4.3"
	LED-8090M50-MHBC	10810				5000K	✓		

VOLTAGE: MH BALLAST ONLY • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

Utility Patent Pending
14/710,301

HIGH BAY

Ballast Bypass—Internal Driver

TYPE
B



OPEN FIXTURE
ONLY

90W
LED-8136M

Replaces up to
250W

Mogul base



135W
LED-8132M

Replaces up to
400W

Mogul base



150W
LED-8130M

Replaces up to
400W

Mogul base
Uplight



150W
LED-8130M-OCG

Replaces up to
400W

Mogul base
Uplight



Occupancy Sensor



ENCLOSED
FIXTURES

75W
LED-8057M

Replaces up to
250W

Mogul base



LED panels angled out and
down for optimal performance

95W
LED-8236M

Replaces up to
250W

Mogul base



140W
LED-8232M

Replaces up to
400W

Mogul base



270W
LED-8242M

Replaces up to
1000W

Mogul base



Ballast Compatible—Plug 'n Play

TYPE
A

- Compatible with pulse or probe start magnetic metal halide ballasts
- Easiest to install—simply screw into existing socket



100W
LED-8036M-MHBC

Replaces
250W and 320W
Mogul base



140W
LED-8030M-MHBC

Replaces
320W and 400W
Mogul base

Aims light upward,
sideways, and down



140W
LED-8032M-MHBC

Replaces
320W and 400W
Mogul base

Total downlight for
ultra-high ceilings

HIGH BAY

A simple upgrade to your existing high bay fixtures that can be done today!



Retrofits into the most popular high bay fixtures

Ideal for use in:

- Large retail spaces
- Industrial spaces
- Auditoriums
- Gymnasiums
- Warehouses
- Factories

Ballast Bypass TYPE B										
DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	UL CLASSIFIED	DIMENSIONS
Open Fixture Only										
LED-8136M 90W	LED-8136M40	LED-8136M40C	11825	250W	90W	EX39 Mogul	4000K	✓	✓	9.3" x 8.7"
	LED-8136M50	LED-8136M50C	11825				5000K	✓	✓	
LED-8132M 135W	LED-8132M40	LED-8132M40C	17055	400W	135W	EX39 Mogul	4000K	✓	✓	10" x 8.7"
	LED-8132M50	LED-8132M50C	17095				5000K	✓	✓	
LED-8130M 150W	LED-8130M40	LED-8130M40C	19285	400W	150W	EX39 Mogul	4000K	✓	✓	10" x 8.7"
	LED-8130M50	LED-8130M50C	19375				5000K	✓	✓	
LED-8130M-OCC 150W	LED-8130M40-OCC	LED-8130M40C-OCC	19285	400W	150W	EX39 Mogul	4000K	✓	✓	10" x 8.7"
	LED-8130M50-OCC	LED-8130M50C-OCC	19375				5000K	✓	✓	
Enclosed Fixture										
LED-8057M 75W	LED-8057M30-A	LED-8057M30C-A	8670	250W	75W	EX39 Mogul	3000K	✓	✓	8.8" x 5.7"
	LED-8057M40-A	LED-8057M40C-A	9607				4000K	✓	✓	
	LED-8057M50-A	LED-8057M50C-A	9236				5000K	✓	✓	
LED-8236M 95W	LED-8236M40	LED-8236M40C	13320	250W	90W	EX39 Mogul	4000K	✓	✓	9.7" x 8.7"
	LED-8236M50	LED-8236M50C	13865				5000K	✓	✓	
LED-8232M 140W	LED-8232M40	LED-8232M40C	18730	400W	140W	EX39 Mogul	4000K	✓	✓	10.5" x 8.7"
	LED-8232M50	LED-8232M50C	19330				5000K	✓	✓	
LED-8242M 270W	LED-8242M40	LED-8242M40C	34415	1000W	270W	EX39 Mogul	4000K	✓	✓	12.5" x 10.2"
	LED-8242M50	LED-8242M50C	35425				5000K	✓	✓	
>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY										

Ballast Compatible – Plug ‘n Play TYPE A									
DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	UL CLASSIFIED	DIMENSIONS
LED-8036M 100W	LED-8036M40-MHBC	11046	Up to 250W	100W	EX39 Mogul	4000K	✓	✓	7.75" x 7.9"
	LED-8036M57-MHBC	10096				5700K	✓	✓	
LED-8030M 140W	LED-8030M40-MHBC	18619	Up to 400W	140W	EX39 Mogul	4000K	✓	✓	9.5" x 9.1"
	LED-8030M57-MHBC	17047				5700K	✓	✓	
LED-8032M 140W	LED-8032M40-MHBC	19578	Up to 400W	140W	EX39 Mogul	4000K	✓	✓	9.5" x 9.1"
	LED-8032M57-MHBC	17892				5700K	✓	✓	
VOLTAGE: MH BALLAST ONLY • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY									



ENCLOSED FIXTURE AND BALLAST COMPATIBLE MODELS ONLY



LOW BAY



Perfect retrofit for parking garages

Ballast Bypass—Internal Driver

TYPE B

52W LED-8025E

Replaces up to 175W

Edison base



* Design Patent 29/415,685
Utility Patent Pending 13/645,209

45W LED-8056M

Replaces up to 175W

Mogul base



LED panels angled out and down for optimal performance

60W LED-8035E*

Replaces up to 175W

Edison base



Uplight provides ceiling illumination and eliminates cave effect

* Design Patent 29/461,332
Utility Patent Pending 14/035,504

Ballast Compatible—Plug 'n Play

TYPE A

- ▶ Compatible with pulse or probe start magnetic metal halide ballasts
- ▶ Easiest to install—simply screw into existing socket

60W LED-8035E-MHBC

Replaces 175W and 250W

Edison base



SPECIFICATIONS

Ballast Bypass | TYPE B

DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	CLASSIFIED	DIMENSIONS
LED-8056M 45W	LED-8056M30-A	LED-8056M30C-A	5525	175W	45W	EX39 Mogul	3000K	✓	✓	7.4" x 5.7"
	LED-8056M40-A	LED-8056M40C-A	5334				4000K	✓	✓	
	LED-8056M50-A	LED-8056M50C-A	5560				5000K	✓	✓	
LED-8025E 52W	LED-8025E42	LED-8025E42C	5498	175W	52W	E26 Edison	4200K	✓		6.1" x 7.8"
	LED-8025E57	LED-8025E57C	5773				5700K	✓		
LED-8035E 60W	LED-8035E40-A	LED-8035E40C-A	6684	175W	60W	E26 Edison	4000K	✓		6.1" x 7.8"
	LED-8035E57-A	LED-8035E57C-A	7062				5700K	✓		

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY



Ballast Compatible | TYPE A

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	c-UL US	DIMENSIONS
LED-8035E 60W	LED-8035E40-MHBC	5773	Up to 250W	60W	E26 Edison	4000K	✓	6.1" x 7.8"
	LED-8035E57-MHBC	5266				5700K	✓	

VOLTAGE: MH BALLAST ONLY • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY



RECESSED CAN



Ballast Bypass—Internal Driver



30W

LED-8055E

Replaces up to 100W

120° beam angle

Edison base



30W

LED-8055M

Replaces up to 100W

120° beam angle

Mogul base



30W

LED-8054E

Replaces up to 100W

140° beam angle

Edison base

Open Fixture



50W

LED-8045M

Replaces up to 175W

45° beam angle



LED-8045M
Penetrating light—
optimal for high ceilings!



except 8054

SPECIFICATIONS

Ballast Bypass | TYPE B

DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	CLASSIFIED	DIMENSIONS
LED-8055E 30W	LED-8055E27	LED-8055E27C	2537	100W	30W	E26 Edison	2700K	✓		6" x 4.7"
	LED-8055E42	LED-8055E42C	2841				4200K	✓		
	LED-8055E57	LED-8055E57C	2885				5700K	✓		
LED-8055M 30W	LED-8055M27	LED-8055M27C	2537	100W	30W	E39 Mogul	2700K	✓	✓	6.8" x 4.7"
	LED-8055M42	LED-8055M42C	2841				4200K	✓	✓	
	LED-8055M57	LED-8055M57C	2885				5700K	✓	✓	
LED-8054E 30W (Open Fixture)	LED-8054E27	LED-8054E27C	2500	100W	30W	E26 Edison	2700K	✓		4.2" x 3.7"
	LED-8054E35	LED-8054E35C	3000				3500K	✓		
	LED-8054E40	LED-8054E40C	3000				4000K	✓		
	LED-8054E50	LED-8054E50C	3000				5000K	✓		
LED-8045M 50W	LED-8045M27	LED-8045M27C	3506	175W	50W	E39 Mogul	2700K	✓	✓	7.1" x 4.7"
	LED-8045M42	LED-8045M42C	4341				4200K	✓	✓	
	LED-8045M57	LED-8045M57C	4686				5700K	✓	✓	

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

Ballast Bypass—*Internal Driver*

TYPE
B

Entirely Frosted Lens

45W
LED-8024E40-F-A

Replaces up to
250W

Edison base



65W
LED-8046M40-F-A

Replaces up to
320W

Mogul base



High-Performance Post Tops

Angled panels and light filters designed to deliver lumens where they are needed most

30W
LED-8144M

Replaces up to 175W
Mogul base



45W
LED-8145M

Replaces up to 250W
Mogul base



65W
LED-8146M

Replaces up to 320W
Mogul base



35W
LED-8033E-A

Replaces up to 175W
Edison base



35W
LED-8033M-A

Replaces up to 175W
Mogul base



45W
LED-8024E-A

Replaces up to 250W
Edison base



45W
LED-8024M-A

Replaces up to 250W
Mogul base



65W
LED-8046M-A

Replaces up to 320W
Mogul base



100W
LED-8027M-A

Replaces up to 400W
Mogul base

POST TOP



High-Performance Post Tops


Maximizes lumen output by aiming light where you want it most.

POST TOP SPECIFICATIONS

Ballast Bypass TYPE B										
DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	UL CLASSIFIED	DIMENSIONS
LED-8144M 30W HIGH PERFORMANCE POST TOP	LED-8144M30-A	LED-8144M30C-A	3891	175W	30W	EX39 Mogul	3000K	✓	✓	11.4" x 6.8"
	LED-8144M40-A	LED-8144M40C-A	4164				4000K	✓	✓	
	LED-8144M50-A	LED-8144M50C-A	4161				5000K	✓	✓	
LED-8033E 35W	LED-8033E30-A	LED-8033E30C-A	4239	175W	35W	E26 Edison	3000K	✓		8.3" x 3.3"
	LED-8033E40-A	LED-8033E40C-A	5468				4000K	✓		
	LED-8033E57-A	LED-8033E57C-A	5617				5700K	✓		
LED-8033M 35W	LED-8033M30-A	LED-8033M30C-A	4550	175W	35W	EX39 Mogul	3000K	✓	✓	8.5" x 3.3"
	LED-8033M40-A	LED-8033M40C-A	5237				4000K	✓	✓	
	LED-8033M57-A	LED-8033M57C-A	5237				5700K	✓	✓	
LED-8145M 45W HIGH PERFORMANCE POST TOP	LED-8145M30-A	LED-8145M30C-A	5398	250W	45W	EX39 Mogul	3000K	✓	✓	11.4" x 6.8"
	LED-8145M40-A	LED-8145M40C-A	5511				4000K	✓	✓	
	LED-8145M50-A	LED-8145M50C-A	5494				5000K	✓	✓	
LED-8024E 45W	LED-8024E30-A	LED-8024E30C-A	6062	250W	45W	E26 Edison	3000K	✓		9.6" x 3.3"
	LED-8024E40-A	LED-8024E40C-A	6924				4000K	✓		
	LED-8024E57-A	LED-8024E57C-A	6619				5700K	✓		
LED-8024E 45W FROSTED POST TOP	LED-8024E40-F-A		6232	250W	45W	E26 Edison	4000K	✓		9.6" x 3.3"
LED-8024M 45W	LED-8024M30-A	LED-8024M30C-A	5893	250W	45W	EX39 Mogul	3000K	✓	✓	9.8" x 3.3"
	LED-8024M40-A	LED-8024M40C-A	6930				4000K	✓	✓	
	LED-8024M57-A	LED-8024M57C-A	6632				5700K	✓	✓	
LED-8146M 65W HIGH PERFORMANCE POST TOP	LED-8146M30-A	LED-8146M30C-A	8647	320W	65W	EX39 Mogul	3000K	✓	✓	11.4" x 6.8"
	LED-8146M40-A	LED-8146M40C-A	8715				4000K	✓	✓	
	LED-8146M50-A	LED-8146M50C-A	8865				5000K	✓	✓	
LED-8046M 65W	LED-8046M30-A	LED-8046M30C-A	8450	320W	65W	EX39 Mogul	3000K	✓	✓	11.1" x 4.1"
	LED-8046M40-A	LED-8046M40C-A	9587				4000K	✓	✓	
	LED-8046M57-A	LED-8046M57C-A	9499				5700K	✓	✓	
LED-8046M 65W FROSTED POST TOP	LED-8046M40-F-A		8628	320W	65W	EX39 Mogul	4000K	✓	✓	11.1" x 4.1"
LED-8027M 100W	LED-8027M30-A	LED-8027M30C-A	12486	400W	100W	EX39 Mogul	3000K	✓	✓	11.8" x 4.5"
	LED-8027M40-A	LED-8027M40C-A	14666				4000K	✓	✓	
	LED-8027M57-A	LED-8027M57C-A	14613				5700K	✓	✓	

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY





TOP MOUNTED LEDs

All models feature top-mounted LEDs



14W
LED-8038E-A

Replaces up to 70W

Edison base



18W
LED-8039E-A

Replaces up to 100W

Edison base



18W
LED-8039M-A

Replaces up to 100W

Mogul base



24W
LED-8029E-A

Replaces up to 150W

Edison base



24W
LED-8029M-A

Replaces up to 150W

Mogul base



8029 only




SPECIFICATIONS

Ballast Bypass | TYPE B

DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	CLASSIFIED UL	DIMENSIONS
LED-8038E 14W	LED-8038E30-A	LED-8038E30C-A	1840	70W	14W	E26 Edison	3000K	✓		5.4" x 2.6"
	LED-8038E40-A	LED-8038E40C-A	2065				4000K	✓		
	LED-8038E57-A	LED-8038E57C-A	2217				5700K	✓		
LED-8039E 18W	LED-8039E30-A	LED-8039E30C-A	2758	100W	18W	E26 Edison	3000K	✓		6.1" x 2.6"
	LED-8039E40-A	LED-8039E40C-A	2983				4000K	✓		
	LED-8039E57-A	LED-8039E57C-A	3071				5700K	✓		
LED-8039M 18W	LED-8039M30-A	LED-8039M30C-A	2758	100W	18W	EX39 Mogul	3000K		✓	6.9" x 2.6"
	LED-8039M40-A	LED-8039M40C-A	2983				4000K		✓	
	LED-8039M57-A	LED-8039M57C-A	3071				5700K		✓	
LED-8029E 24W	LED-8029E30-A	LED-8029E30C-A	3024	150W	24W	E26 Edison	3000K	✓		6.8" x 2.9"
	LED-8029E40-A	LED-8029E40C-A	3422				4000K	✓		
	LED-8029E57-A	LED-8029E57C-A	3425				5700K	✓		
LED-8029M 24W	LED-8029M30-A	LED-8029M30C-A	3431	150W	24W	EX39 Mogul	3000K	✓	✓	7" x 2.9"
	LED-8029M40-A	LED-8029M40C-A	3374				4000K	✓	✓	
	LED-8029M57-A	LED-8029M57C-A	3374				5700K	✓	✓	

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

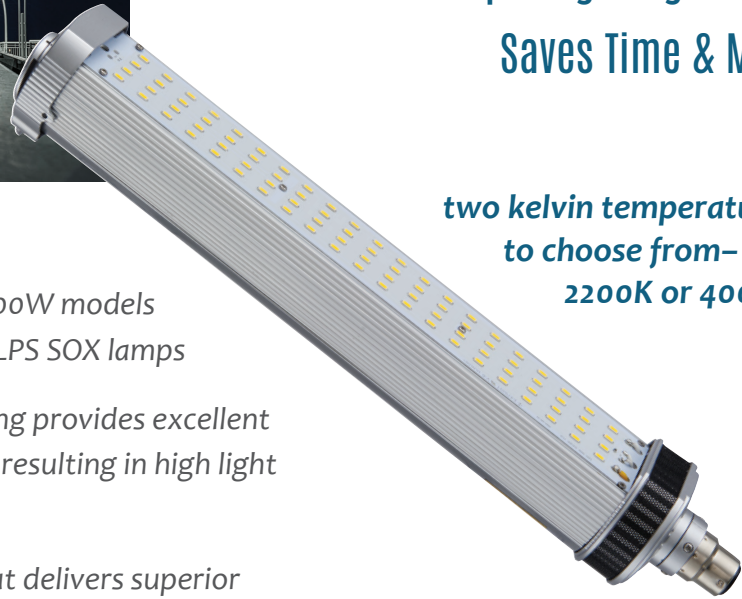

Unique Lighting Solution Saves Time & Money

two kelvin temperatures
to choose from—
2200K or 4000K

- ▶ 20W, 35W, 60W and 100W models replacing up to 180W LPS SOX lamps
- ▶ Advanced active cooling provides excellent thermal management resulting in high light output and long life
- ▶ Directional light output delivers superior dark sky performance
- ▶ USA designed and specified internal LED driver
- ▶ Innovative aluminum heat sink with size options to fill entire fixture
- ▶ Support harness included



SPECIFICATIONS

Ballast Bypass – Internal Driver TYPE B								
DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	c US	DIMENSIONS
12" SOX 20W	LED-8100-22K	2030	35W	20W	B22	2200K	✓	12.1" x 2.7"
	LED-8100-40K	3022				4000K	✓	
16" SOX 35W	LED-8101-22K	3232	55W	35W	B22	2200K	✓	16.7" x 2.7"
	LED-8101-40K	5156				4000K	✓	
20" SOX 60W	LED-8102-22K	5769	90W	60W	B22	2200K	✓	20.5" x 2.7"
	LED-8102-40K	8198				4000K	✓	
43" SOX 100W	LED-8104-22K	11576	180W	100W	B22	2200K	✓	43.5" x 2.7"
	LED-8104-40K	15472				4000K	✓	

VOLTAGE: 120-277VAC • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

Ballast Bypass—Internal Driver



All models feature top-mounted LEDs



Perfect retrofit for hazardous locations such as:

- Nuclear Reactor Sites
- Wastewater Treatment Plants
- Oil Refineries
- Oil Rigs
- Mine Tunnels



24W
LED-8929M-HAZ

Replaces up to 150W

Mogul base



24W
LED-8929E-HAZ

Replaces up to 150W

Edison base

Approved for **Hazardous Location: Class 1, Division 2**
See our website for a list of approved fixtures



SPECIFICATIONS

DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	CLASSIFIED	DIMENSIONS
LED-8929E 24W	LED-8929E57-HAZ	LED-8929E57C-HAZ	3400	150W	24W	E26 Edison	5700K	✓		6.75" x 2.9"
LED-8929M 24W	LED-8929M57-HAZ	LED-8929M57C-HAZ	3400	150W	24W	EX39 Mogul	5700K	✓	✓	7" x 2.9"


>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

Our latest pin-based LED retrofits are perfect for PL applications, and provide a long-lasting LED alternative for walls or recessed areas in offices, hotels, lobbies, schools, etc.



2-PIN


Compatible bases



OR

4-PIN

Compatible bases



HORIZONTAL

OMNI-DIRECTIONAL

VERTICAL



7W
LED-7311

Replaces up to 13W
GX23-2 base

7W
LED-7312

Replaces up to 13W
GX23-2 base

7W
LED-7322

Replaces up to 26W
GX24d base

11W
LED-7324

Replaces up to 26W
G/GX24q base

11W
LED-7334

Replaces up to 26W
G/GX24q base



5W
LED-7300

Replaces up to 13W
GX23 base



10W
LED-7320

Replaces up to 26W
G/GX24q base



10W
LED-7330

Replaces up to 26W
G/GX24q base

Type B Only
With both a telescoping horizontal and fixed vertical adapter included with each lamp

25W
LED-7342

Replaces up to 42W

G24q base



Type B Only

omni-directional mounting style.



23W
LED-7340

Replaces up to 42W
GX211 base



12W
LED-7318

Replaces up to 26W
G/GX24q base



12W
LED-7338

Replaces up to 26W
G/GX24q base



Also Available
LED-7319

Extender for 7318 and 7338 only

Type A = Ballast Compatible
Type A/B = Ballast Bypass 120-277V or Ballast Compatible
Type B = Ballast Bypass

SPECIFICATIONS

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	BEAM ANGLE	CCT	DIMENSIONS
LED-7300 5W 2-PIN UNIVERSAL	LED-7300-27K-G2	500	13W	5W	GX23	360°	2700K	5.5" x 1.4"
	LED-7300-35K-G2	550					3500K	
	LED-7300-40K-G2	550					4000K	
LED-7311 7W 2-PIN UNIVERSAL	LED-7311-27K-G2	815	13W	7W	G23-2	120°	2700K	5.8" x 1.4"
	LED-7311-35K-G2	883					3500K	
	LED-7311-40K-G2	892					4000K	
LED-7312 7W 2-PIN UNIVERSAL	LED-7312-27K-G2	801	13W	7W	GX23-2	120°	2700K	5.8" x 1.4"
	LED-7312-35K-G2	899					3500K	
	LED-7312-40K-G2	914					4000K	
LED-7322 7W 2-PIN UNIVERSAL	LED-7322-27K-G2	849	26W	7W	G24-d	120°	2700K	5.8" x 1.4"
	LED-7322-35K-G2	869					3500K	
	LED-7322-40K-G2	887					4000K	
LED-7320 10W 4-PIN UNIVERSAL	LED-7320-27K-G2	900	26W	10W	G/GX24-q	360°	2700K	7" x 1.4"
	LED-7320-35K-G2	1000					3500K	
	LED-7320-40K-G2	1000					4000K	
LED-7330 10W 4-PIN BALLAST COMPATIBLE	LED-7330-27K-G2	900	26W	10W	G/GX24-q	360°	2700K	6.2" x 1.4"
	LED-7330-35K-G2	1000					3500K	
	LED-7330-40K-G2	1000					4000K	
LED-7324 11W 4-PIN UNIVERSAL	LED-7324-27K-G2	1200	26W	11W	G/GX24-q	120°	2700K	5.8" x 1.4"
	LED-7324-35K-G2	1200					3500K	
	LED-7324-40K-G2	1200					4000K	
LED-7334 11W 4-PIN BALLAST COMPATIBLE	LED-7334-27K-G2	1200	26W	11W	G/GX24-q	120°	2700K	5.8" x 1.4"
	LED-7334-35K-G2	1200					3500K	
	LED-7334-40K-G2	1200					4000K	
LED-7318 12W 4-PIN UNIVERSAL	LED-7318-27K-G2	837	26W	12W	G/GX24-q	120°	2700K	3.8" x 3"
	LED-7318-35K-G2	1157					3500K	
	LED-7318-40K-G2	1198					4000K	
LED-7338 12W 4-PIN BALLAST COMPATIBLE	LED-7338-27K-G2	1100	26W	12W	G/GX24-q	120°	2700K	3.8" x 3"
	LED-7338-35K-G2	1100					3500K	
	LED-7338-40K-G2	1100					4000K	
LED-7340 23W 4-PIN TYPE B	LED-7340-30K-G2	2100	40W	17W	2G11	160°	42W	22" x 1.6"
	LED-7340-35K-G2	2100					42W	22" x 1.6"
	LED-7340-40K-G2	2200					42W	22" x 1.6"
LED-7342 25W 4-PIN TYPE B	LED-7342-27K-G2	2000	42W	25W	G24-q	140°	2700K	4.2" x 3.6"
	LED-7342-35K-G2	2500					3500K	
	LED-7342-40K-G2	2500					4000K	
LED-7319	LED-7319	Extender for 7318 and 7338 only			G24q/d			

VOLTAGE: 120-277VAC • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY





LINEAR T8/T5 TUBES



Energy-Saving Replacement
for Fluorescent T8 and T5 Tubes

Ballast Compatible*—Plug 'n Play **TYPE A**

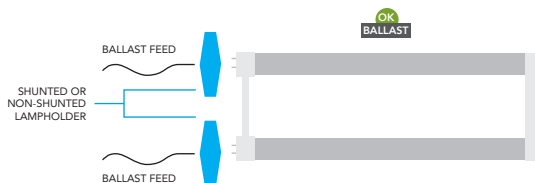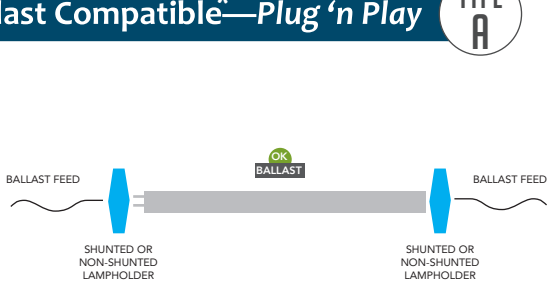

SPECIFICATIONS

Ballast Compatible* – Plug 'n Play | TYPE A

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	DIMENSIONS
2' T8 - 8W	LED-8T8-835BC24-G3	1200	17W	8W	G13	3500K	✓	23.7" x 1.1"
2' T8 - 8W	LED-9T8-840DE24-G3	1250	17W	8W	G13	4000K	✓	23.7" x 1.1"
2' T8 - 8W	LED-9T8-850DE24-G3	1250	17W	8W	G13	5000K	✓	23.7" x 1.1"
3' T8 - 10W	LED-10T8-835BC36-G3	1400	25W	10W	G13	3500K	✓	35.7" x 1.1"
3' T8 - 10W	LED-10T8-840BC36-G3	1450	25W	10W	G13	4000K	✓	35.7" x 1.1"
3' T8 - 10W	LED-10T8-850BC36-G3	1450	25W	10W	G13	5000K	✓	35.7" x 1.1"
4' T8 - 12W	LED-12T8-835BC48-G3	1700	32W	12W	G13	3500K	✓	47.7" x 1.1"
4' T8 - 12W	LED-12T8-840BC48-G3	1800	32W	12W	G13	4000K	✓	47.7" x 1.1"
4' T8 - 12W	LED-12T8-850BC48-G3	1800	32W	12W	G13	5000K	✓	47.7" x 1.1"
4' T8 - 15W	LED-15T8-835BC48-G3	2100	32W	15W	G13	3500K	✓	47.7" x 1.1"
4' T8 - 15W	LED-15T8-840BC48-G3	2200	32W	15W	G13	4000K	✓	47.7" x 1.1"
4' T8 - 15W	LED-15T8-850BC48-G3	2200	32W	15W	G13	5000K	✓	47.7" x 1.1"
2' T5 - 11W	LED-11T5HO-835BC24-G3	1350	24W	11W	G5	3500K	✓	23.7" x 1.1"
2' T5 - 11W	LED-11T5HO-840BC24-G3	1400	24W	11W	G5	4000K	✓	23.7" x 1.1"
2' T5 - 11W	LED-11T5HO-850BC24-G3	1400	24W	11W	G5	5000K	✓	23.7" x 1.1"
4' T5 HO - 25W	LED-25T5HO-835BC48-G3	3300	54W	25W	G5	3500K	✓	47.7" x 1.0"
4' T5 HO - 25W	LED-25T5HO-840BC48-G3	3500	54W	25W	G5	4000K	✓	47.7" x 1.0"
4' T5 HO - 25W	LED-25T5HO-850BC48-G3	3500	54W	25W	G5	5000K	✓	47.7" x 1.0"
2' T8U6-15W	LED-15U6-835BC-G3	2100	32W	15W	2G13	3500K	✓	22.5" x 7.0" x 1.1"
2' T8U6-15W	LED-15U6-840BC-G3	2200	32W	15W	2G13	4000K	✓	22.5" x 7.0" x 1.1"
2' T8U6-15W	LED-15U6-850BC-G3	2200	32W	15W	2G13	5000K	✓	22.5" x 7.0" x 1.1"


VOLTAGE: 120-277VAC • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

*Compatible with instant start ballasts only.



Ballast Bypass—Internal Driver TYPE B

Double-ended Power
Shunted or non-shunted lamp holder




Ballast Bypass – Internal Driver | TYPE B | DOUBLE-ENDED POWER

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	DIMENSIONS
2' T8 - 9W	LED-9T8-835DE24-G3	1100	17W	9W	G13	3500K	✓	23.7" x 1.1"
2' T8 - 9W	LED-9T8-840DE24-G3	1150	17W	9W	G13	4000K	✓	23.7" x 1.1"
2' T8 - 9W	LED-9T8-850DE24-G3	1150	17W	9W	G13	5000K	✓	23.7" x 1.1"
3' T8 - 12W	LED-12T8-835DE36-G3	1400	25W	12W	G13	3500K	✓	35.7" x 1.1"
3' T8 - 12W	LED-12T8-840DE36-G3	1450	25W	12W	G13	4000K	✓	35.7" x 1.1"
3' T8 - 12W	LED-12T8-850DE36-G3	1450	25W	12W	G13	5000K	✓	35.7" x 1.1"
4' T8 - 12W	LED-12T8-835DE48-G3	1700	32W	12W	G13	3500K	✓	47.7" x 1.1"
4' T8 - 12W	LED-12T8-840DE48-G3	1800	32W	12W	G13	4000K	✓	47.7" x 1.1"
4' T8 - 12W	LED-12T8-850DE48-G3	1800	32W	12W	G13	5000K	✓	47.7" x 1.1"
4' T8 - 15W	LED-15T8-835DE48-G3	2100	32W	15W	G13	3500K	✓	47.7" x 1.1"
4' T8 - 15W	LED-15T8-840DE48-G3	2200	32W	15W	G13	4000K	✓	47.7" x 1.1"
4' T8 - 15W	LED-15T8-850DE48-G3	2200	32W	15W	G13	5000K	✓	47.7" x 1.1"
8' T8 - 43W	LED-43T8-840B96-G3	5500	86W	43W	FA8	4000K	✓	93.4" x 1.1"
8' T8 - 43W	LED-43T8-850B96-G3	5500	86W	43W	FA8	5000K	✓	93.4" x 1.1"
8' T8 HO - 43W	LED-43T8HO-840B96-G3	5500	86W	43W	R17D	4000K	✓	93.4" x 1.1"
8' T8 HO - 43W	LED-43T8HO-850B96-G3	5500	86W	43W	R17D	5000K	✓	93.4" x 1.1"
4' T5 HO - 25W	LED-25T5HO-835DE48-G3	3300	54W	25W	G5	3500K	✓	47.7" x 1.0"
4' T5 HO - 25W	LED-25T5HO-840DE48-G3	3500	54W	25W	G5	4000K	✓	47.7" x 1.0"
4' T5 HO - 25W	LED-25T5HO-850DE48-G3	3500	54W	25W	G5	5000K	✓	47.7" x 1.0"



Ballast Bypass—Internal Driver TYPE B

Single-ended Power | Non-shunted lamp holder



Ballast Bypass – Internal Driver | TYPE B | SINGLE-ENDED POWER

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	DIMENSIONS
4' T8 - 18W	LED-18T8-840SE48-G3	2200	32W	18W	G13	4000K	✓	47.7" x 1.0"
4' T8 - 18W	LED-18T8-850SE48-G3	2200	32W	18W	G13	5000K	✓	47.7" x 1.0"
2' T8U6-15W	LED-18U6-835SE-G3	2100	32W	18W	2G13	3500	✓	22.5" x 7.0" x 1.1"
2' T8U6-15W	LED-18U6-840SE-G3	2200	32W	18W	2G13	4000	✓	22.5" x 7.0" x 1.1"
2' T8U6-15W	LED-18U6-850SE-G3	2200	32W	18W	2G13	5000	✓	22.5" x 7.0" x 1.1"

INTRODUCING...

RemPhos by Light Efficient Design

We're bringing a new species of lighting to the Light Efficient Design family of LED products. With a focus on innovation and thoughtful LED lighting, our new RemPhos product offering enhances our commitment to *Powering the Switch to LED...ALL WAYS.*

Our newest line of LED retrofit kits and fixtures includes products featuring RemPhos innovative "FLEX" technologies.



Select your desired wattage from 4 wattages on the same unit



Pick from 3 color temperatures on the same unit to ensure the perfect color



Comes control ready. Or choose basic occupancy sensor or LG Zigbee control



DRUM/SCONCE/VANITY RETROFIT SPECIFICATIONS

PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS (FLEX)	WATT (FLEX)	CCT OPTIONS	CONTROLLER/OCCUPANCY SENSOR	ETL	ENERGY STAR	DIMENSIONS
LEDCR-G2 10W	9" Circular Drum Retrofit	RPT-P-LEDCR-G2-9IN-14L-840-FWFC	1370 (780-3124)	10W (6-22W)	3000/3500/ 4000K	NO	✓	✓	8.7" x 8.7" x 2"
	9" Circular Drum Retrofit w/Occ Sensor	RPT-P-LEDCR-G2-9IN-14L-840-FWFC-OCC	1370 (780-3124)	10W (6-22W)	3000/3500/ 4000K	YES	✓	✓	8.7" x 8.7" x 2"
LEDSR-G2 6W	4" Sconce Retrofit	RPT-P-LEDSR-G2-4IN-8L-840-FWFC	816 (780-2130)	6W (6-15W)	3000/3500/ 4000K	NO	✓	✓	6.5" x 7" x 2.1"
	4" Sconce Retrofit w/Occ Sensor	RPT-P-LEDSR-G2-4IN-8L-840-FWFC-OCC	816 (780-2130)	6W (6-15W)	3000/3500/ 4000K	YES	✓	✓	6.5" x 7" x 2.1"
	9" Sconce Retrofit	RPT-P-LEDSR-G2-9IN-8L-840-FWFC	816 (780-2130)	6W (6-15W)	3000/3500/ 4000K	NO	✓	✓	8.7" x 4.5" x 2"
	9" Sconce Retrofit w/Occ Sensor	RPT-P-LEDSR-G2-9IN-8L-840-FWFC-OCC	816 (780-2130)	6W (6-15W)	3000/3500/ 4000K	YES	✓	✓	8.7" x 4.5" x 2"
	14" Vanity Retrofit (End Mnt Drv)	RPT-P-LEDSR-G2-14INE-8L-840-FWFC	816 (780-2130)	6W (6-15W)	3000/3500/ 4000K	NO	✓	✓	14" x 2.7" x 2.1"
	14" Vanity Retrofit (End Mnt Drv) w/Occ Sensor	RPT-P-LEDSR-G2-14INE-8L-840-FWFC-OCC	816 (780-2130)	6W (6-15W)	3000/3500/ 4000K	YES	✓	✓	14" x 2.7" x 2.1"
	14" Vanity Retrofit (Mid Mnt Drv)	RPT-P-LEDSR-G2-14INM-8L-840-FWFC	816 (780-2130)	6W (6-15W)	3000/3500/ 4000K	NO	✓	✓	14" x 2.7" x 2.1"
	14" Vanity Retrofit (Mid Mnt Drv) w/Occ Sensor	RPT-P-LEDSR-G2-14INM-8L-840-FWFC-OCC	816 (780-2130)	6W (6-15W)	3000/3500/ 4000K	YES	✓	✓	14" x 2.7" x 2.1"

VOLTAGE: 120-277VAC • 85 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY

Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT: 1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. 2. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.


5 styles. 4 lumen packages.
3 color temperatures. 2 control options.
1 perfect solution for all your drum,
linear + sconce retrofit needs.

Optional integrated
high/low motion and
daylight sensor.
Completely adjustable
and hidden behind
the fixture lens

9IN

LEDCR-G2

6W, **10W**, 16W, 22W
3000°K, 3500°K, **4000°K**
(expandable LED boards)

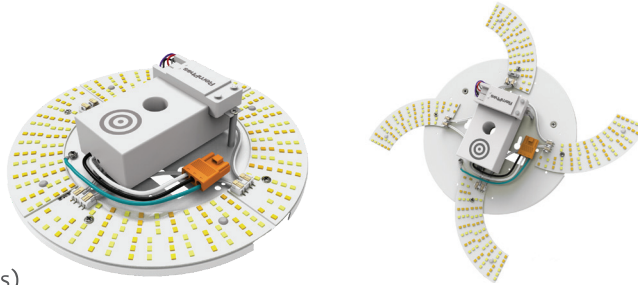

Retrofit these
fixtures & more



SURFACE MOUNTS




VANITIES/LINEARS

4IN

LEDSR-G2

6W, 10W, 12W, 15W
3000°K, 3500°K, **4000°K**
(expandable LED boards)

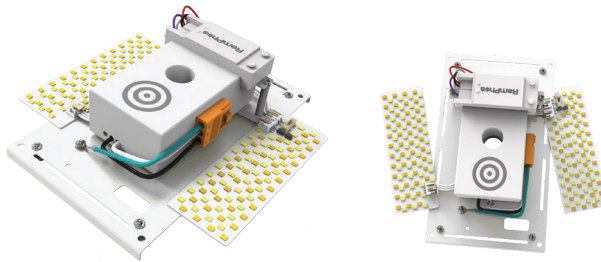


WALL MOUNTS

14INE

LEDSR-G2


6W, 10W, 12W, 15W
3000°K, 3500°K, **4000°K**
(fixed LED boards)



14INM

LEDSR-G2


6W, 10W, 12W, 15W
3000°K, 3500°K, **4000°K**
(fixed LED boards)

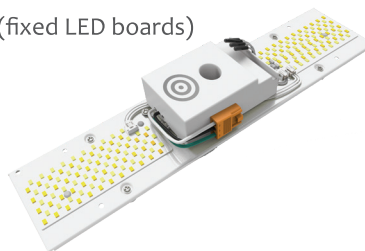

9IN

LEDSR-G2

6W, 10W, 12W, 15W
3000°K, 3500°K, **4000°K**
(fixed LED boards)



Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT:
1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. 2. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.

LINEAR BARKITS

One light. Unlimited possibilities. ETL and DLC listed as both a retrofit kit and a fixture.

available in both
BASE & PRO

EXTERNAL DRIVER

6W-25W
RP-LBI

available in 2ft, 3ft, 4ft lengths

INTERNAL
DRIVER

Perfect for

Linear and general purpose, Strips & Wraps, Troffers, Vapor Tights, Low bay and High bay, Coves and Soffits, Stairwells

2.5W-20W
RPT-BARKITJ

available in 2ft, 3ft, 4ft lengths

LINEAR BARKIT SPECIFICATIONS



PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS (FLEX)	WATT (FLEX)	CCT OPTIONS	ETL US LISTED	DIMENSIONS
PRO LED BARKIT INTERNAL DRIVER	2' PRO Internal Drive Light Bar	RP-LBI-G1-2F-6W-40K-WC	780-1560	6W (6-12W)	3500/ 4000 /5000K	✓	1.2" x 1.2" x 19.3"
	3' PRO Internal Drive Light Bar	RP-LBI-G1-3F-10W-40K-WC	1400-2100	10W (10-15W)	3500/ 4000 /5000K	✓	1.2" x 1.2" x 31.3"
	4' PRO Internal Drive Light Bar	RP-LBI-G1-4F-15W-40K-WC	1370-3425	15W (10-25W)	3500/ 4000 /5000K	✓	1.2" x 1.2" x 43.3"

VOLTAGE: 120-277VAC • 80+ CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY

Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT:

1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. 2. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.

PRODUCT	DESCRIPTION	RemPhos Part #	LUMENS	WATT	CCT	ETL US LISTED	DIMENSIONS
BASE LED BARKIT INTERNAL DRIVER	4' BASE Internal Drive Light Bar	RP-LBI-G1-4F-15W-40K-B	2325	15W	4000	✓	1.2" x 1.2" x 43.3"

VOLTAGE: 120-277VAC • 80+ CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY


PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS	WATT	CCT OPTIONS	UL US LISTED	DIMENSIONS
LED BARKITJ EXTERNAL DRIVER	One 4' Bar & One 15W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-15W-4FT-1L-840	1950	15W	4000	✓	44.4" X 1" X 1"
	Two 4' Bars & One 20W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-30W-4FT-2L-840	3900	30W	4000	✓	44.4" X 1" X 1"
	Three 4' Bars & One 40W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-40W-4FT-3L-840	5200	40W	4000	✓	34.3" X 1" X 1"
	Four 4' Bars & One 60W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-60W-4FT-4L-840	7800	60W	4000	✓	34.3" X 1" X 1"
	One 2' Bar & One 10W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-10W-2FT-1L-840	1300	10W	4000	✓	21.7" X 1" X 1"
	Two 2' Bars & One 20W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-20W-2FT-2L-840	2600	20W	4000	✓	21.7" X 1" X 1"
	90 Min Battery Backup Kit	RPT-ACCESSORY-EMGKIT-HS1-500LM	500	<4W	4000	✓	
90 Min Battery Backup Kit	RPT-ACCESSORY-EMGKIT-HS1-1000LM	1000	<4W	4000	✓		

VOLTAGE: 120-277VAC • 80+ CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY

Perfect for High Bays, Floodlights, Wall Packs, Shoe Box

Directional 180° HID Retrofit Kit

This high-power LED Block G3 retrofit module replaces HID, HPS or MH lamps, and comes with our next generation mounting bracket system that can be used in either vertical or horizontal orientation.

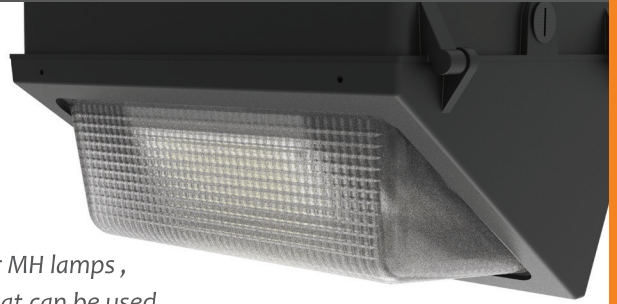

30W-280W

Replaces up to 1000W



CHECK OUT THE RPT MODELS BELOW FOR ULTIMATE FLEXIBILITY AND EVEN MORE FEATURES



LEDBLOCK[®] SPECIFICATIONS

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	ETL _{US}	DIMENSIONS
LED BLOCK KITS	LED-8150-50K	20565	400W	150W	NA	5000K	✓	11.8" x 6.4" x 5.1"
	LED-8280-50K	38765	1000W	280W	NA	5000K	✓	16.9" x 10.5" x 6.1"
	LED-8280-50K-HV (480V)	38765	1000W	280W	NA	5000K	✓	16.9" x 10.5" x 6.1"

VOLTAGE: 120-277VAC • >70 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY (LED-8150-8280)

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	ETL _{US}	DIMENSIONS
RPT BLOCK KITS	RPT-LEDBLOCK-65L-750-10VDIM-G3	5100	175W	30W	N/A	5000K	✓	4.7" x 4.7"
	RPT-LEDBLOCK-100L-750-10VDIM-G3	8850	250W	52W	N/A	5000K	✓	4.7" x 4.7"
	RPT-LEDBLOCK-150L-750-10VDIM-G3	15700	400W	100W	N/A	5000K	✓	5.1" x 6.1"
	RPT-LEDBLOCK-200L-750-10VDIM-G3	20000	400W	110W	N/A	5000K	✓	5.1" x 6.1"
	RPT-LEDBLOCK-300L-750-10VDIM-G3	24000	>400W	150W	N/A	5000K	✓	7.9" x 5.9"
	RPT-LEDBLOCK-400L-750-10VDIM-G3	43000	1000W	277W	N/A	5000K	✓	10.6" x 10"

VOLTAGE: 120-277VAC • >70 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY (RPT-LEDBLOCK-G3)

HIGH BAY

High Output LED Performance in a Self-Contained High Bay Luminaire



150W
LED-9150
Replaces up to 400W

300W
LED-9300
Replaces up to 1000W

Diffuser Lens Now Included

- ▶ High efficacy >125 LPW
- ▶ High foot candles:
 - 150W - 5.5FC @ 34'
 - 300W - 5.5FC @ 51'
- ▶ Hanging cables included
- ▶ 6' power cord with stripped leads included

HIGH BAY LUMINAIRE SPECIFICATIONS

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	DIMENSIONS
150W HIGH BAY	LED-9150-50K	18780	400W	150W	NA	5000K	✓	23.8" x 23.8" x 2.8"
300W HIGH BAY	LED-9300-50K	38533	1000W	300W	NA	5000K	✓	48" x 23.8" x 2.8"

VOLTAGE: 120-277VAC • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

HIGH TEMPERATURE HIGH BAY

Superior performance in extreme environments. 176°F ambient rating, suitable for foundries, steel mills, smelters and other demanding applications.

150W
RP-HTHB
Replaces up to 400W HID



DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	VOLTAGE	CCT	UL LISTED	DIMENSIONS
150W HIGH TEMP HIGH BAY	RP-HTHB-21L-50K	>21000	400W	150W	120-277	5000K	✓	22" x 10.2"
150W (HIGH VOLTAGE) HIGH TEMP HIGH BAY	RP-HTHB-21L-50K-HV	>21000	400W	150W	347-480	5000K	✓	22" x 10.2"

70 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY



PRODUCT	DESCRIPTION	RemPhos Part #
HIGH TEMP HIGH BAY ACCESSORIES	60° Reflector for High Temp High Bay	RP-HTBH-REFLECTOR-60DEG
	Junction Box for High Temp High Bay	RP-HTBH-JBOX
	JBox Bracket for High Temp High Bay	RP-HTBH-JBOXBRACKET
	Trunnion Bracket for High Temp High Bay	RP-HTBH-TRUNBRACKET

Highest in class LPW. Patented “v-groove” bracket mounting allows for a fast and easy installation.



300W
LEDAL-400L
replaces 1200W MH system



240W
LEDAL-200L, 270L, 330L
replaces 1000W MH system



100W
LEDAL-75L, 120L, 140L
replaces 400W MH system

Available
Mounting
Brackets



LED AREA LIGHT SPECIFICATIONS

PRODUCT	DESCRIPTION	RemPhos Part #	LUMENS	REPLACES	WATT	CCT	DIMENSIONS
LED AREA LIGHTS	50W LED AREA LIGHT	RPT-P-LEDAL-G2-75L-840-STD-T3-DB	7500	200W	50W	4000K	15.7" X 15.3" X 3.4"
	80W LED AREA LIGHT	RPT-P-LEDAL-G2-120L-840-STD-T3-DB	12000	300W	80W	4000K	15.7" X 15.3" X 3.4"
	100W LED AREA LIGHT	RPT-P-LEDAL-G2-140L-840-STD-T3-DB	14000	400W	100W	4000K	15.7" X 15.3" X 3.4"
	150W LED AREA LIGHT	RPT-P-LEDAL-G2-200L-840-STD-T3-DB	20000	600W	150W	4000K	21.6" X 15.3" X 3.4"
	200W LED AREA LIGHT	RPT-P-LEDAL-G2-270L-840-STD-T3-DB	27000	800W	200W	4000K	21.6" X 15.3" X 3.4"
	240W LED AREA LIGHT	RPT-P-LEDAL-G2-330L-840-STD-T3-DB	33000	1000W	240W	4000K	21.6" X 15.3" X 3.4"
	300W LED AREA LIGHT	RPT-P-LEDAL-G2-400L-840-STD-T3-DB	40000	1200W	300W	4000K	27.5" X 15.3" X 3.4"

>80 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY



PRODUCT	DESCRIPTION	RemPhos Part #
LED AREA LIGHT ACCESSORIES	Adjustable Slip-Fitter Bracket, Dark Bronze	RP-AL-BKT-A-DB-G2
	Square and Round Pole Bracket, Dark Bronze	RP-AL-BKT-B-DB-G2
	Trunnion Bracket, Dark Bronze	RP-AL-BKT-C-DB-G2
	Wall Mount Bracket, Dark Bronze	RP-AL-BKT-F-DB-G2

Edge-lit LED flat panel fixtures, which integrates RemPhos' FlexWatt + FlexColor + FlexControl Technologies.

2x2
LED PANEL G3

16W - 28W



flexWATT + flexCOLOR + flexCONTROL

- ▶ Each unit can be configured to 4 different wattage packages and 3 different CCTs
- ▶ Optional integrated high/low motion sensor. Completely adjustable and hidden behind the fixture lens

1x4
LED PANEL G3

16W - 28W



2x4
LED PANEL G3

20W - 40W



LED FLAT PANEL SPECIFICATIONS

PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS (FLEX)	WATT (FLEX)	CCT OPTIONS	CONTROLLER/OCCUPANCY SENSOR	UL LISTED	DIMENSIONS
LED PANELS	2' x 2' LED Panel	RPT-P-LEDPANEL-G3-2X2-20L-840-FWFC-A	2032 (2000-3640)	16W (16-28W)	3500/ 4000 /5000K	NO	✓	23.74" x 23.74"
	2' x 2' LED Panel w/OCC Sensor	RPT-P-LEDPANEL-G3-2X2-20L-840-FWFC-OCC-A	2032 (2000-3640)	16W (16-28W)	3500/ 4000 /5000K	YES	✓	23.74" x 23.74"
	2' x 4' LED Panel	RPT-P-LEDPANEL-G3-2X4-20L-840-FWFC-A	3612 (2540-5280)	28W (20-40W)	3500/ 4000 /5000K	NO	✓	23.74" x 47.75"
	2' x 4' LED Panel w/OCC Sensor	RPT-P-LEDPANEL-G3-2X4-20L-840-FWFC-OCC-A	3612 (2540-5280)	28W (20-40W)	3500/ 4000 /5000K	YES	✓	23.74" x 47.75"
	1' x 4' LED Panel	RPT-P-LEDPANEL-G3-1X4-20L-840-FWFC-A	2480 (1968-3556)	16W (16-28W)	3500/ 4000 /5000K	NO	✓	11.73" x 47.75"
	1' x 4' LED Panel w/OCC Sensor	RPT-P-LEDPANEL-G3-1X4-20L-840-FWFC-OCC-A	2480 (1968-3556)	16W (16-28W)	3500/ 4000 /5000K	YES	✓	11.73" x 47.75"

VOLTAGE: 120-277VAC • 85 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY

Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT:

1. You can easily adjust in field via our FlexWatt and FlexColor internal switches.
2. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.

flexWATT + flexCOLOR + flexCONTROL

Select your desired wattage from 4 wattages on the same unit

Pick from 3 color temperatures on the same unit to ensure the perfect color

Comes control ready. Or choose basic occupancy sensor or LG Zigbee control

LED Linear Stairwell & Corridor Fixture featuring RemPhos' FlexWatt + FlexColor + FlexControl Technologies.

2FT, 3FT, 4FT


LIVC G2

10W-40W

3000°K, 3500°K, 4000°K



LED STAIRWELL/CORRIDOR LUMINAIRE SPECIFICATIONS

PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS (FLEX)	WATT (FLEX)	CCT OPTIONS	CONTROLLER/OCCUPANCY SENSOR		DIMENSIONS
STAIRWELL/ CORRIDOR LUMINAIRE	24" Corridor/Stairway	RPT-P-LIVC-G2-2FT-20L-840-FWFC-R-S1	1994 (1267-4099)	15W (10-30W)	3000/3500/ 4000K	NO	✓	4.2" x 6" x 23"
	24" Corridor/Stairway w/Occ Sensor	RPT-P-LIVC-G2-2FT-20L-840-FWFC-OCC-R-S1	1994 (1267-4099)	15W (10-30W)	3000/3500/ 4000K	YES	✓	4.2" x 6" x 34"
	36" Corridor/Stairway	RPT-P-LIVC-G2-3FT-20L-840-FWFC-R-S1	1994 (1267-4099)	15W (10-30W)	3000/3500/ 4000K	NO	✓	4.2" x 6" x 23"
	36" Corridor/Stairway w/Occ Sensor	RPT-P-LIVC-G2-3FT-20L-840-FWFC-OCC-R-S1	1994 (1267-4099)	15W (10-30W)	3000/3500/ 4000K	YES	✓	4.2" x 6" x 46"
	48" Corridor/Stairway	RPT-P-LIVC-G2-4FT-20L-840-FWFC-R-S1	1994 (1267-5329)	15W (10-40W)	3000/3500/ 4000K	NO	✓	4.2" x 6" x 34"
	48" Corridor/Stairway w/Occ Sensor	RPT-P-LIVC-G2-4FT-20L-840-FWFC-OCC-R-S1	1994 (1267-5329)	15W (10-40W)	3000/3500/ 4000K	YES	✓	4.2" x 6" x 46"

VOLTAGE: 120-277VAC • 85 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY

Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT:
 1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. 2. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.

CEILING LUMINAIRES


Surface mount LED drum fixtures featuring RemPhos' FlexWatt + FlexColor + FlexControl Technologies.

14IN, 18IN

Designer Drum G2

6W-22W

3500°K (also avail. in 3000°K and 4000°K)



11IN, 14IN

Utility Drum G2

6W-22W

3500°K (also avail. in 3000°K and 4000°K)




Powered by the LEDCR G2 Light Engine
see page 21

11IN

Designer Sconce G2

10W

3500°K (also avail. in 3000°K and 4000°K)



Powered by the LEDSR G2 Light Engine
see page 21



LED DRUM SPECIFICATIONS

PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS (FLEX)	WATT (FLEX)	CCT OPTIONS	CONTROLLER/OCCUPANCY SENSOR	ETL US	ENERGY STAR	DIMENSIONS
LED DRUM	11" Utility Drum Luminaire	RP-DRU-11N-14L-40K-WC-G2	1370 (780-3124)	10W (6-22W)	3000/3500/ 4000K	NO	✓	✓	3.5" x 11"
	11" Utility Drum Luminaire w/OCC Sensor	RP-DRU-11N-14L-40K-WC-G2-OC1	1370 (780-3124)	10W (6-22W)	3000/3500/ 4000K	YES	✓	✓	3.5" x 14"
	14" Utility Drum Luminaire	RP-DRU-14N-14L-40K-WC-G2	1370 (780-3124)	10W (6-22W)	3000/3500/ 4000K	NO	✓	✓	3.5" x 11"
	14" Utility Drum Luminaire w/OCC Sensor	RP-DRU-14N-14L-40K-WC-G2-OC1	1370 (780-3124)	10W (6-22W)	3000/3500/ 4000K	YES	✓	✓	3.5" x 14"
	14" Decorative Drum Luminaire	RP-DRD-14N-14L-40K-WC-G2	1370 (780-3124)	10W (6-22W)	3000/3500/ 4000K	NO	✓	✓	3.5" x 14"
	14" Decorative Drum Luminaire w/OCC Sensor	RP-DRD-14N-14L-40K-WC-G2-OC1	1370 (780-3124)	10W (6-22W)	3000/3500/ 4000K	YES	✓	✓	3.5" x 14"
	18" Decorative Drum Luminaire	RP-DRD-18N-14L-40K-WC-G2	1370 (780-3124)	10W (6-22W)	3000/3500/ 4000K	NO	✓	✓	3.5" x 18"
	18" Decorative Drum Luminaire w/OCC Sensor	RP-DRD-18N-14L-40K-WC-G2-OC1	1370 (780-3124)	10W (6-22W)	3000/3500/ 4000K	YES	✓	✓	3.5" x 18"
LED SCONCE	11" Utility Sconce Luminaire	RP-SCD-11N-8L-40K-WC-G2	816 (780-2130)	6W (6-22W)	3000/3500/ 4000K	NO	✓	✓	3.5" x 18"
	11" Utility Sconce Luminaire w/OCC Sensor	RP-SCD-11N-8L-40K-WC-G2-OC1	816 (780-2130)	6W (6-22W)	3000/3500/ 4000K	YES	✓	✓	3.5" x 18"

VOLTAGE: 120-277VAC • 85 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY

Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT:

1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. 2. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.



120V Temporary Work Site Lights!


Super bright and durable, our LED work site lights reduce costs and labor with an integrated power cord and daisy-chain feature.




20W
LED-9002
Replaces up to 350W (70W x 5 lights)



60W
LED-9006
Replaces up to 250W
20' power cord
Connect up to 10 lights together



100W
LED-9010
Replaces up to 400W
35' power cord
Connect up to 6 lights together

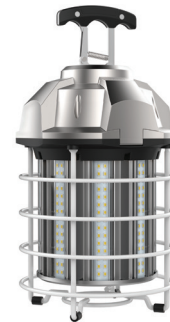

150W
LED-9015
Replaces up to 400W
35' power cord
Connect up to 4 lights together

SPECIFICATIONS

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	DIMENSIONS
WORK LIGHT 5-PACK	LED-9002-50K-5PK	2000	100W	20W	NA	5000K	✓	7.0" x 4.3"
WORK LIGHT w/20' CORD	LED-9006-50K	6600	250W	60W	NA	5000K	✓	10.8" x 6.5"
WORK LIGHT w/35' CORD	LED-9010-50K	11000	400W	100W	NA	5000K	✓	12.2" x 6.5"
WORK LIGHT w/35' CORD	LED-9015-50K	16500	400W	150W	NA	5000K	✓	13.4" x 6.2"

VOLTAGE: 120 • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

SOLAR LIGHTS



Go completely off-grid with our all new solar products.
All-in-one design, solar panel and battery are built into the LED fixture.



7W, 15W
RP-SWL

7W comparable to 50W
15W comparable to 100W



4W
RP-SML

comparable to 35W



1W
RP-SSL

comparable to 20W


SOLAR SPECIFICATIONS

DESCRIPTION	RemPhos Part #	LUMENS	COMPARABLE TO	WATT	CCT	DIMENSIONS
7W SOLAR WALL PACK	RP-SWL-7W-40K-BK-G1	700	50W	7W	4000K	9.2" X 7.5" X 4"
15W SOLAR WALL PACK	RP-SWL-15W-40K-BK-G1	1500	100W	15W	4000K	12.2" X 10.2" X 5"

DESCRIPTION	RemPhos Part #	LUMENS	COMPARABLE TO	WATT	CCT	DIMENSIONS
4W SOLAR WALL MOUNT LIGHT	RP-SML-4W-40K0BK-G1	400	35W	4W	4000K	8.4" X 5.3" X 2.9"

DESCRIPTION	RemPhos Part #	LUMENS	COMPARABLE TO	WATT	CCT	DIMENSIONS
1W SOLAR STEP LIGHT	RP-SSL-1W-40K-BK-G1	20	20W	<1W	4000K	7.9" X 4.8" X 2.5"

DESCRIPTION	RemPhos Part #	LUMENS	COMPARABLE TO	WATT	CCT	DIMENSIONS
8W SOLAR AREA LIGHT	RP-SAL-8W-50K-SF-GY-G1	1000	70W	8W	5000K	20" X 11.6" X 3.3"
30W SOLAR AREA LIGHT	RP-SAL-30W-50K-SF-GY-G1	6000	250W	30W	5000K	36" X 16.7" X 3.7"



8W, 30W RP-SAL

8W comparable to 70W
30W comparable to 250W



CHARGE TIME



BATTERY LIFE



adjust solar panel angle to maximize sunlight & allow snow to slide off



motion sensor and time control are programmable via remote



INCLUDED W/QUICK SHIP MODELS

Adjustable Slip-Fitter Bracket (SF)



Round Pole Bracket (RP)



Square Pole Bracket (SP)



Trunnion Bracket (TN)

SOLAR AREA LIGHT ACCESSORIES

DESCRIPTION	RemPhos Part #
REMOTE (ORDER ONLY IF EXTRA IS NEEDED)	RP-SAL-REMOTE-G1
SPECIAL TURTLE FRIENDLY COLOR TEMP ADDER	-AMBER
8W REPLACEMENT BATTERY	RP-SAL-BTRY-8W
30W REPLACEMENT BATTERY	RP-SAL-BTRY-30W
ROUND POLE BRACKET FOR 8W	RP-SAL-BKT-8W-RP-G1
SQUARE POLE BRACKET FOR 8W	RP-SAL-BKT-8W-SP-G1
TRUNNION BRACKET FOR 8W	RP-SAL-BKT-8W-TN-G1
ROUND POLE BRACKET FOR 30W	RP-SAL-BKT-30W-RP-G1
SQUARE POLE BRACKET FOR 30W	RP-SAL-BKT-30W-SP-G1
TRUNNION BRACKET FOR 30W	RP-SAL-BKT-30W-TN-G1

Find Your Sales Representative



- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------------------------|--|--|--|---|---------------------------------------|---|-------------------------------------|--|--|---|---|---------------------------------------|--|---|---|--|---|--|--|--|---|---|--|--|---|---|-----------------------------------|---|---|--|---|---|---|---|--|--|---|
| 1 Hallmarking – WA/AK
503-265-8028 | 2 Pro-Lines Sales & Marketing – OR
503-692-6993 | 3a Electro Rep – N. CA/N. NV
415-332-4100 | 3b Electro Rep – S. CA
619-892-6270 | 4 Desert States – Las Vegas
702-461-7563 | 7 Hallmarking – N. ID
503-265-8028 | 8 Wilson Sales – UT/S. ID
801-292-4867 | 9 Desert Sales – AZ
602-268-7008 | 10 Electrical Lines – CO/WY/MT
303-722-5721 | 11 Mountain States Agency – NM
505-867-5805 | 12A Electra Sales – N. TX
972-554-8200 | 12B ETEL – S. TX
713-678-4460 - Houston
210-829-7153 - San Antonio
512-914-0858 - Austin | 13 Electra Sales – OK
405-543-1924 | 14 RB Sales Corp. – KS/W. MO
816-350-1114 | 15 RB Sales Corp. – IA/NE/W. IL
319-373-8877 | 16 MRL Company – MN/ND/SD
612-331-2457 | 17 Engineered Rep. Inc. – WI
920-751-3922 | 18 McDonald & Assoc. – IL
847-577-0888 | 19 Martin Electrical Sales – E. MO
314-966-8659 | 20 Byron-Carson – AR/N. MS/W. TN
901-276-0614 | 21 SMR Gulf Coast – LA/S. MS
281-774-3751 | 22A JE Heusser Agency – AL/FL panhandle
205-936-8513 | 22B Bishop & Brogdon – GA
404-494-4333 | 23 Gorin Cockrell McCoy – FL
800-241-8657 | 24 E.F. Lombardi – NC/SC
704-227-2890 | 25 Electrical Sales Assoc. – TN
615-242-2774 | 26a Riffle & Associate – OH
N. OH - 440-543-8257
S. OH - 513-771-0002 | 26b LP Chick – KY
502-964-8181 | 27 New Century Sales – IN
317-334-9697 | 28 Team Electrical – MI
313-874-1000 | 29 Paolicelli & Assoc. – PA/WV
412-276-8816 | 30 Electrical Sales Assoc. – VA
804-282-1864 | 31 R.C. Colerick – MD/W. DC
410-421-9511 | 32 Synergy Elec. Sales – E. PA/S. NJ/DE
215-428-1130 | 33 Ascend Sales & Mktg. – Metro NYC/N. NJ
908-320-0333 | 35 RD Wright – NY North of Westchester
518-966-5980 | 36 Lighting for Distributors - LFD Solutions
MA/R/VT/CT/ME/NH
401-323-3467 | 37 Pacific Rim Connections – HI
808-847-0007 |
|---------------------------------------|--|--|--|---|---------------------------------------|---|-------------------------------------|--|--|---|---|---------------------------------------|--|---|---|--|---|--|--|--|---|---|--|--|---|---|-----------------------------------|---|---|--|---|---|---|---|--|--|---|



- | | | | | | |
|--|---|---|---|---|--|
| 1 Pacific Coast Agency
British Columbia
604-457-1555 | 2 ElectrixWest Agencies, LTD
Calgary - 403-256-8649
Edmonton - 780-628-5201 | 3 Industrial Solutions Network
Saskatchewan/Manitoba
306-242-2599 | 4 Electrical Sales Network
Ontario
905-795-2525 | 5 Agence Ricard
Quebec
514-250-5043 | 6 Focus Electrical Sales
New Brunswick/Newfoundland
Prince Edward Island
506-852-9333 |
|--|---|---|---|---|--|

Powering the Switch to LED

Distributed By:

For product downloads, go to
www.led-llc.com/documents/technical

