




Light Efficient Design

RemPhos



Screw-In
Retrofits



Pin-Base
Retrofits



Retrofit Kits



Fixtures



Work Lights



Solar Lights

o led-llc.com o

2020 FIRST EDITION

Join our monthly

pro workshop webinar

Stay up to date with our latest product offerings, company and industry news!

Contact Rebecca Healy for details rhealy@led-llc.com



Table of Contents

Introduction to Light Efficient Design.....2-3

Accessories.....2

Screw-In Retrofits

Shoe Box / Wall Pack.....4-5

High Bay6-7

Low Bay8

Recessed Can9

Post Top.....10-11

Bollard12-13

SOX 14

Hazardous Location 15

Pin-Base Retrofits

PL.....16-17

T818-19

Retrofit Kits20-23

LED Fixtures24-28

Work Lights29

Solar Lights

Solar30-31

Light Efficient Design Representatives32

ACCESSORIES SPECIFICATIONS

DESCRIPTION	MODEL #	TYPE	ENCLOSURE	NOMINAL DISCHARGE CURRENT	STRIKE RATING	DIMENSIONS
SURGE ARRESTORS	SPD-277P-10KA-EC-1	10kA surge arrester, 120-277V, series with thermal fuse, 5 year limited manufacturer's warranty	Round IP65	10,000A	1@10kA 2@6.5kA 15@3kA 110@1.5kA	2.5" x 1.4"
	SPD-347P-10KA	10kA surge arrester, 120-347V, series with thermal fuse, 5 year limited manufacturer's warranty	Round IP67			

DESCRIPTION	MODEL #	TYPE	MAX WATTAGE	INPUT/OUTPUT VOLTAGE	THD	POWER FACTOR	DIMENSIONS
STEP DOWN TRANSFORMERS	MTM04506227C	450VA Stepdown transformer	400W	480/347V in 277V out	3.4% 3.8%	0.99	4.2" x 2.7" x 2.2"
	MTM01606227C	160VA Stepdown transformer	150W	480/347V in 277V out	4.3% 4.1%	0.99	4.2" x 2.0" x 1.6"
	MTM00506224C	50VA Stepdown transformer	45W	480/347V in 240V out	6.2% 6.7%	0.98 0.97	3.0" x 1.7" x 1.4"

Sample Program


Try our LED retrofits in your project with no risk. Sample quantities* are available with 60-day terms, and can be returned in original cartons within 60 days. No restocking fee, no questions asked. That's our "try before rollout" guarantee!

* Up to 4 pieces

Stay up-to-date with our Marketing Materials...

led-llc.com/marketing-material

Counter Mat / Selector Guide

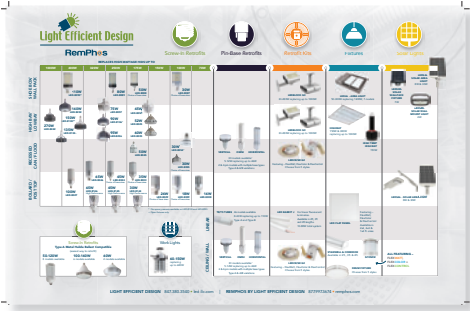

Gondolas



Product Displays



LED-9800
1 LAMP DISPLAY
(8"x10"x4")



LED-9750
PL DISPLAY
(16"x5"x10")



SL-9100
SOLERA SOLAR DISPLAY
(9"x9"x16")



LED-9900
SMALL 2 LAMP DISPLAY
(6"x10"x16")





RP-LBI-G1-1F-2X-DISPLAY
LBI DISPLAY
(10"x9"x22")

LED-9902
SCREW-IN RETROFIT
2 FOOT GONDOLA
(24" X 14" X 78")

LED-9903
SCREW-IN RETROFIT
3 FOOT GONDOLA
(36" X 14" X 78")

LED-XXXX
SOLERA SOLAR
2 FOOT GONDOLA
(24" X 14" X 78")

Light Distribution / Foot Candle Comparison

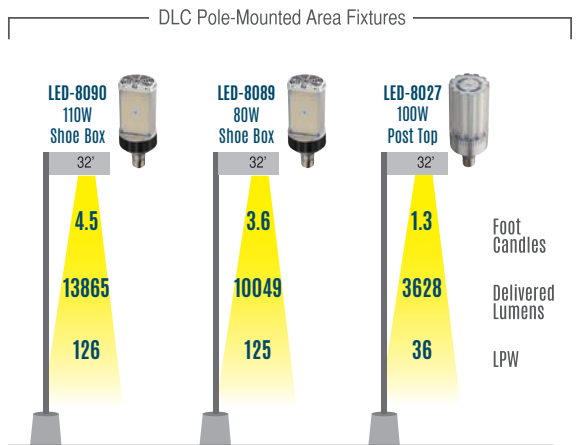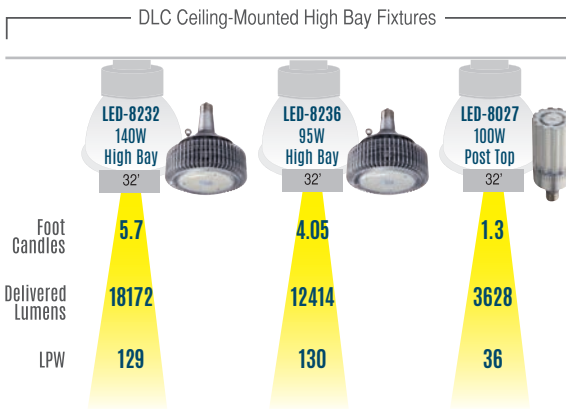

CHOOSE THE RIGHT SHAPE TO OPTIMIZE YOUR RETROFIT


SHOE BOX / WALL PACK



Ballast Bypass—Internal Driver

TYPE B

- ▶ All models rotate easily once secured tightly in sockets
- ▶ Pinpoint directional light so no lumens are lost in the box



All models have Type V optics unless otherwise noted



20W **NEW!**
LED-8086E-G4
Replaces up to 70W
Edison base



30W
LED-8087E-G4
Replaces up to 100W
Edison or Mogul base



50W
LED-8088E-G4
Replaces up to 175W
Edison or Mogul base



80W **NEW!**
LED-8089M-G5
Replaces up to 250W
Mogul base



110W
LED-8090M-G4
Replaces up to 400W
Mogul base



110W
LED-8090M-G4-T3
Replaces up to 400W
Mogul base
Type III optics



110W
LED-8090M-G4-T4
Replaces up to 400W
Mogul base
Type IV optics



110W
LED-8090M-G4-OCC
Replaces up to 400W
Mogul base
Motion sensor

(LED-8089 included)

Ballast Compatible—Plug 'n Play

TYPE A

- ▶ Compatible with pulse or probe start magnetic metal halide ballasts
- ▶ Easiest to install—simply screw into existing socket



80W
LED-8089M-MHBC
Replaces 250W
Mogul base



120W
LED-8090M-MHBC
Replaces 320W and 400W
Mogul base



50W
LED-8088E-MHBC
Replaces 175W
Edison base



50W
LED-8088M-MHBC
Replaces 175W
Mogul base

SHOE BOX / WALL PACK



SPECIFICATIONS

Ballast Bypass | TYPE B




DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	CLASSIFIED	DIMENSIONS
LED-8086E G4 30W	LED-8086E30-G4	LED-8086E30C-G4	2800	70W	20W	E26 Edison	3000K	✓		5.5" x 3"
	LED-8086E40-G4	LED-8086E40C-G4	2800				4000K	✓		
	LED-8086E50-G4	LED-8086E50C-G4	2880				5000K	✓		
LED-8087E G4 30W	LED-8087E30-G4		3534	100W	30W	E26 Edison	3000K	✓		5.5" x 3"
	LED-8087E40-G4	LED-8087E40C-A	4260				4000K	✓		
	LED-8087E57-G4	LED-8087E57C-A	4255				5000K	✓		
LED-8087M G4 30W	LED-8087M30-G4		3534	100W	30W	E39 Mogul	3000K	✓	✓	6.7" x 3"
	LED-8087M40-G4	LED-8087M40C-A	4260				4000K	✓	✓	
	LED-8087M57-G4	LED-8087M57C-A	4255				5000K	✓	✓	
LED-8088E G4 50W	LED-8088E30-G4	LED-8088E30C-G4	6915	175W	50W	E26 Edison	3000K	✓		7.9" x 3.8"
	LED-8088E40-G4	LED-8088E40C-G4	6460				4000K	✓		
	LED-8088E50-G4	LED-8088E50C-G4	7250				5000K	✓		
LED-8088M G4 50W	LED-8088M30-G4	LED-8088M30C-G4	6915	175W	50W	EX39 Mogul	3000K	✓	✓	8.5" x 3.8"
	LED-8088M40-G4	LED-8088M40C-G4	6460				4000K	✓	✓	
	LED-8088M50-G4	LED-8088M50C-G4	7250				5000K	✓	✓	
LED-8089M G5 80W	LED-8089M30-G5	LED-8089M30C-G5	10670	250W	80W	EX39 Mogul	3000K	✓	✓	8.3" x 4.3"
	LED-8089M40-G5	LED-8089M40C-G5	10760				4000K	✓	✓	
	LED-8089M50-G5	LED-8089M50C-G5	10850				5000K	✓	✓	
LED-8090M G4 110W	LED-8090M30-G4	LED-8090M30C-G4	15745	400W	110W	EX39 Mogul	3000K	✓	✓	11.4" x 4.3"
	LED-8090M40-G4	LED-8090M40C-G4	15430				4000K	✓	✓	
	LED-8090M50-G4	LED-8090M50C-G4	14570				5000K	✓	✓	
LED-8090M G4-T3 110W	LED-8090M40-G4-T3	LED-8090M40C-G4-T3	12630	400W	110W	EX39 Mogul	4000K	✓	✓	11.4" x 4.3"
	LED-8090M50-G4-T3	LED-8090M50C-G4-T3	12840				5000K	✓	✓	
LED-8090M G4-T4 110W	LED-8090M40-G4-T4	LED-8090M40C-G4-T4	12165	400W	110W	EX39 Mogul	4000K	✓	✓	11.4" x 4.3"
	LED-8090M50-G4-T4	LED-8090M50C-G4-T4	12780				5000K	✓	✓	
LED-8090M G4-DIM 110W	LED-8090M40-G4-OCC	LED-8090M40C-G4-DIM	15430	400W	110W	EX39 Mogul	4000K	✓	✓	11.4" x 4.3"
	LED-8090M50-G4-OCC	LED-8090M50C-G4-DIM	14570				5000K	✓	✓	

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY



ON ALL MODELS



Step-down transformers available for 480V applications

see page 2

Ballast Compatible | TYPE A

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	DIMENSIONS
LED-8088E 50W	LED-8088E40-MHBC	5188	250W	50W	E26 Edison	4000K	✓	7.9" x 3.8"
	LED-8088E57-MHBC	6282				5700K	✓	
LED-8088M 50W	LED-8088M40-MHBC	5188	250W	50W	E39 Mogul	4000K	✓	8.5" x 3.8"
	LED-8088M57-MHBC	6282				5700K	✓	
LED-8089M 80W	LED-8089M40-MHBC	7941	320W	80W	E39 Mogul	4000K	✓	11.4" x 4.3"
	LED-8089M50-MHBC	7635				5000K	✓	
LED-8090M 120W	LED-8090M40-MHBC	9929	400W	120W	E39 Mogul	4000K	✓	11.4" x 4.3"
	LED-8090M50-MHBC	10810				5000K	✓	

VOLTAGE: MH BALLAST ONLY • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

Utility Patent Pending
14/710,301

Ballast Bypass—Internal Driver

TYPE
B



OPEN FIXTURE
ONLY

90W LED-8136M

Replaces up to
250W

Mogul base



135W LED-8132M

Replaces up to
400W

Mogul base



150W LED-8130M

Replaces up to
400W

Mogul base
Uplight



150W LED-8130M-OCG

Replaces up to
400W

Mogul base
Uplight



Occupancy Sensor



ENCLOSED
FIXTURES

75W LED-8057M

Replaces up to
250W

Mogul base



LED panels angled out and
down for optimal performance

95W LED-8236M

Replaces up to
250W

Mogul base



140W LED-8232M

Replaces up to
400W

Mogul base



270W LED-8242M

Replaces up to
1000W

Mogul base



Ballast Compatible—Plug 'n Play

TYPE
A

- Compatible with pulse or probe start magnetic metal halide ballasts
- Easiest to install—simply screw into existing socket



100W LED-8036M-MHBC

Replaces
250W and 320W
Mogul base



140W LED-8030M-MHBC

Replaces
320W and 400W
Mogul base

Aims light upward,
sideways, and down



140W LED-8032M-MHBC

Replaces
320W and 400W
Mogul base

Total downlight for
ultra-high ceilings

HIGH BAY



A simple upgrade to your existing high bay fixtures that can be done today!



Retrofits into the most popular high bay fixtures

Ideal for use in:

- Large retail spaces
- Industrial spaces
- Auditoriums
- Gymnasiums
- Warehouses
- Factories

Ballast Bypass TYPE B										
DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT			DIMENSIONS
Open Fixture Only										
LED-8136M 90W	LED-8136M40	LED-8136M40C	11825	250W	90W	EX39 Mogul	4000K	✓	✓	9.3" x 8.7"
	LED-8136M50	LED-8136M50C	11825				5000K	✓	✓	
LED-8132M 135W	LED-8132M40	LED-8132M40C	17055	400W	135W	EX39 Mogul	4000K	✓	✓	10" x 8.7"
	LED-8132M50	LED-8132M50C	17095				5000K	✓	✓	
LED-8130M 150W	LED-8130M40	LED-8130M40C	19285	400W	150W	EX39 Mogul	4000K	✓	✓	10" x 8.7"
	LED-8130M50	LED-8130M50C	19375				5000K	✓	✓	
LED-8130M-OCC 150W	LED-8130M40-OCC	LED-8130M40C-OCC	19285	400W	150W	EX39 Mogul	4000K	✓	✓	10" x 8.7"
	LED-8130M50-OCC	LED-8130M50C-OCC	19375				5000K	✓	✓	
Enclosed Fixture										
LED-8057M 75W	LED-8057M30-A	LED-8057M30C-A	8670	250W	75W	EX39 Mogul	3000K	✓	✓	8.8" x 5.7"
	LED-8057M40-A	LED-8057M40C-A	9607				4000K	✓	✓	
	LED-8057M50-A	LED-8057M50C-A	9236				5000K	✓	✓	
LED-8236M 95W	LED-8236M40	LED-8236M40C	13320	250W	90W	EX39 Mogul	4000K	✓	✓	9.7" x 8.7"
	LED-8236M50	LED-8236M50C	13865				5000K	✓	✓	
LED-8232M 140W	LED-8232M40	LED-8232M40C	18730	400W	140W	EX39 Mogul	4000K	✓	✓	10.5" x 8.7"
	LED-8232M50	LED-8232M50C	19330				5000K	✓	✓	
LED-8242M 270W	LED-8242M40	LED-8242M40C	34415	1000W	270W	EX39 Mogul	4000K	✓	✓	12.5" x 10.2"
	LED-8242M50	LED-8242M50C	35425				5000K	✓	✓	
>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY										

Ballast Compatible – Plug 'n Play TYPE A										
DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT			DIMENSIONS	
LED-8036M 100W	LED-8036M40-MHBC	11046	Up to 250W	100W	EX39 Mogul	4000K	✓	✓	7.75" x 7.9"	
	LED-8036M57-MHBC	10096				5700K	✓	✓		
LED-8030M 140W	LED-8030M40-MHBC	18619	Up to 400W	140W	EX39 Mogul	4000K	✓	✓	9.5" x 9.1"	
	LED-8030M57-MHBC	17047				5700K	✓	✓		
LED-8032M 140W	LED-8032M40-MHBC	19578	Up to 400W	140W	EX39 Mogul	4000K	✓	✓	9.5" x 9.1"	
	LED-8032M57-MHBC	17892				5700K	✓	✓		
VOLTAGE: MH BALLAST ONLY • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY										



ENCLOSED FIXTURE AND BALLAST COMPATIBLE MODELS ONLY



LOW BAY



Perfect retrofit for parking garages

Ballast Bypass—Internal Driver

TYPE B

45W
LED-8056E

Replaces up to 175W

Edison base



* Design Patent 29/415,685
Utility Patent Pending 13/645,209

45W
LED-8056M

Replaces up to 175W

Mogul base



LED panels angled out and down for optimal performance

60W
LED-8035E*

Replaces up to 175W

Edison base



Uplight provides ceiling illumination and eliminates cave effect

* Design Patent 29/461,332
Utility Patent Pending 14/035,504

Ballast Compatible—Plug 'n Play

TYPE A

- ▶ Compatible with pulse or probe start magnetic metal halide ballasts
- ▶ Easiest to install—simply screw into existing socket

60W
LED-8035E-MHBC

Replaces 175W and 250W

Edison base



SPECIFICATIONS

Ballast Bypass | TYPE B

DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	CLASSIFIED	DIMENSIONS
LED-8056E 45W	LED-8056E30-A	LED-8056E30C-A	5525	175W	45W	E26 Edison	3000K	✓		6.9" x 5.7"
	LED-8056E40-A	LED-8056E40C-A	5334				4000K	✓		
	LED-8056E50-A	LED-8056E50C-A	5560				5000K	✓		
LED-8056M 45W	LED-8056M30-A	LED-8056M30C-A	5525	175W	45W	EX39 Mogul	3000K	✓	✓	7.4" x 5.7"
	LED-8056M40-A	LED-8056M40C-A	5334				4000K	✓	✓	
	LED-8056M50-A	LED-8056M50C-A	5560				5000K	✓	✓	
LED-8035E 60W	LED-8035E40-A	LED-8035E40C-A	6684	175W	60W	E26 Edison	4000K	✓		6.1" x 7.8"
	LED-8035E57-A	LED-8035E57C-A	7062				5700K	✓		

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY


Ballast Compatible | TYPE A

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	DIMENSIONS
LED-8035E 60W	LED-8035E40-MHBC	5773	Up to 250W	60W	E26 Edison	4000K	✓	6.1" x 7.8"
	LED-8035E57-MHBC	5266				5700K	✓	

VOLTAGE: MH BALLAST ONLY • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY



ON ALL MODELS



RECESSED CAN



Ballast Bypass—Internal Driver



30W

LED-8055E

Replaces up to 100W

120° beam angle

Edison base



30W

LED-8055M

Replaces up to 100W

120° beam angle

Mogul base



30W

LED-8054E-G2

Replaces up to 100W

140° beam angle

Edison base

Open Fixture



50W

LED-8045M

Replaces up to 175W

45° beam angle



LED-8045M
Penetrating light—
optimal for high ceilings!



except 8054

SPECIFICATIONS

Ballast Bypass | TYPE B

DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	CLASSIFIED UL	DIMENSIONS
LED-8055E 30W	LED-8055E27	LED-8055E27C	2537	100W	30W	E26 Edison	2700K	✓		6" x 4.7"
	LED-8055E42	LED-8055E42C	2841				4200K	✓		
	LED-8055E57	LED-8055E57C	2885				5700K	✓		
LED-8055M 30W	LED-8055M27	LED-8055M27C	2537	100W	30W	E39 Mogul	2700K	✓	✓	6.8" x 4.7"
	LED-8055M42	LED-8055M42C	2841				4200K	✓	✓	
	LED-8055M57	LED-8055M57C	2885				5700K	✓	✓	
LED-8054E-G2 30W (Open Fixture)	LED-8054E27-G2	LED-8054E27C-G2	2500	100W	30W	E26 Edison	2700K	✓		4.2" x 4.9"
	LED-8054E35-G2	LED-8054E35C-G2	3000				3500K	✓		
	LED-8054E40-G2	LED-8054E40C-G2	3000				4000K	✓		
	LED-8054E50-G2	LED-8054E50C-G2	3000				5000K	✓		
LED-8045M 50W	LED-8045M27	LED-8045M27C	3506	175W	50W	E39 Mogul	2700K	✓	✓	7.1" x 4.7"
	LED-8045M42	LED-8045M42C	4341				4200K	✓	✓	
	LED-8045M57	LED-8045M57C	4686				5000K	✓	✓	

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

POST TOP

Ballast Bypass—Internal Driver

TYPE
B

Entirely Frosted Lens

45W
LED-8024E40-F-A

Replaces up to
250W

Edison base



65W
LED-8046M40-F-A

Replaces up to
320W

Mogul base



High-Performance Post Tops

Angled panels and light filters designed to deliver lumens where they are needed most

30W
LED-8144M

Replaces up to 175W
Mogul base



45W
LED-8145M

Replaces up to 250W
Mogul base



65W
LED-8146M

Replaces up to 320W
Mogul base



35W
LED-8033E-A

Replaces up to 175W
Edison base



35W
LED-8033M-A

Replaces up to 175W
Mogul base



45W
LED-8024E-A

Replaces up to 250W
Edison base



45W
LED-8024M-A

Replaces up to 250W
Mogul base



65W
LED-8046M-A

Replaces up to 320W
Mogul base



100W
LED-8027M-A

Replaces up to 400W
Mogul base

POST TOP



High-Performance Post Tops

Maximizes lumen output by aiming light where you want it most.

POST TOP SPECIFICATIONS

Ballast Bypass TYPE B										
DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	UL CLASSIFIED	DIMENSIONS
LED-8144M 30W HIGH PERFORMANCE POST TOP	LED-8144M30-A	LED-8144M30C-A	3891	175W	30W	EX39 Mogul	3000K	✓	✓	11.4" x 6.8"
	LED-8144M40-A	LED-8144M40C-A	4164				4000K	✓	✓	
	LED-8144M50-A	LED-8144M50C-A	4161				5000K	✓	✓	
LED-8033E 35W	LED-8033E30-A	LED-8033E30C-A	4239	175W	35W	E26 Edison	3000K	✓		8.3" x 3.3"
	LED-8033E40-A	LED-8033E40C-A	5468				4000K	✓		
	LED-8033E57-A	LED-8033E57C-A	5617				5700K	✓		
LED-8033M 35W	LED-8033M30-A	LED-8033M30C-A	4550	175W	35W	EX39 Mogul	3000K	✓	✓	8.5" x 3.3"
	LED-8033M40-A	LED-8033M40C-A	5237				4000K	✓	✓	
	LED-8033M57-A	LED-8033M57C-A	5237				5700K	✓	✓	
LED-8145M 45W HIGH PERFORMANCE POST TOP	LED-8145M30-A	LED-8145M30C-A	5398	250W	45W	EX39 Mogul	3000K	✓	✓	11.4" x 6.8"
	LED-8145M40-A	LED-8145M40C-A	5511				4000K	✓	✓	
	LED-8145M50-A	LED-8145M50C-A	5494				5000K	✓	✓	
LED-8024E 45W	LED-8024E30-A	LED-8024E30C-A	6062	250W	45W	E26 Edison	3000K	✓		9.6" x 3.3"
	LED-8024E40-A	LED-8024E40C-A	6924				4000K	✓		
	LED-8024E57-A	LED-8024E57C-A	6619				5700K	✓		
LED-8024E 45W FROSTED POST TOP	LED-8024E40-F-A		6232	250W	45W	E26 Edison	4000K	✓		9.6" x 3.3"
LED-8024M 45W	LED-8024M30-A	LED-8024M30C-A	5893	250W	45W	EX39 Mogul	3000K	✓	✓	9.8" x 3.3"
	LED-8024M40-A	LED-8024M40C-A	6930				4000K	✓	✓	
	LED-8024M57-A	LED-8024M57C-A	6632				5700K	✓	✓	
LED-8146M 65W HIGH PERFORMANCE POST TOP	LED-8146M30-A	LED-8146M30C-A	8647	320W	65W	EX39 Mogul	3000K	✓	✓	11.4" x 6.8"
	LED-8146M40-A	LED-8146M40C-A	8715				4000K	✓	✓	
	LED-8146M50-A	LED-8146M50C-A	8865				5000K	✓	✓	
LED-8046M 65W	LED-8046M30-A	LED-8046M30C-A	8450	320W	65W	EX39 Mogul	3000K	✓	✓	11.1" x 4.1"
	LED-8046M40-A	LED-8046M40C-A	9587				4000K	✓	✓	
	LED-8046M57-A	LED-8046M57C-A	9499				5700K	✓	✓	
LED-8046M 65W FROSTED POST TOP	LED-8046M40-F-A		8628	320W	65W	EX39 Mogul	4000K	✓	✓	11.1" x 4.1"
LED-8027M 100W	LED-8027M30-A	LED-8027M30C-A	12486	400W	100W	EX39 Mogul	3000K	✓	✓	11.8" x 4.5"
	LED-8027M40-A	LED-8027M40C-A	14666				4000K	✓	✓	
	LED-8027M57-A	LED-8027M57C-A	14613				5700K	✓	✓	

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY





All models feature top-mounted LEDs



14W
LED-8038E-A
Replaces up to
70W
Edison base



18W
LED-8039E-A
Replaces up to
100W
Edison base



18W
LED-8039M-A
Replaces up to
100W
Mogul base



24W
LED-8029E-A
Replaces up to
150W
Edison base



24W
LED-8029M-A
Replaces up to
150W
Mogul base



20W
LED-8017E
Replaces up to
100W (HID)
150W (INC)
Edison base



Dimmable
20W
LED-8017E-DIM
Replaces up to
100W (HID)
150W (INC)
Edison base



14W
LED-8015E
Replaces up to
70W (HID)
100W (INC)
Edison base



25W
LED-8018M
Replaces up to
150W (HID)
200W (INC)
Edison base
Mogul base



35W
LED-8019M
Replaces up to
175W (HID)
300W (INC)
Mogul base

INC = INCANDESCENT

SPECIFICATIONS

Ballast Bypass | TYPE B

DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	CLASSIFIED	DIMENSIONS
LED-8038E 14W	LED-8038E30-A	LED-8038E30C-A	1840	70W	14W	E26 Edison	3000K	✓		5.4" x 2.6"
	LED-8038E40-A	LED-8038E40C-A	2065				4000K	✓		
	LED-8038E57-A	LED-8038E57C-A	2217				5700K	✓		
LED-8039E 18W	LED-8039E30-A	LED-8039E30C-A	2758	100W	18W	E26 Edison	3000K	✓		6.1" x 2.6"
	LED-8039E40-A	LED-8039E40C-A	2983				4000K	✓		
	LED-8039E57-A	LED-8039E57C-A	3071				5700K	✓		
LED-8039M 18W	LED-8039M30-A	LED-8039M30C-A	2758	100W	18W	EX39 Mogul	3000K		✓	6.9" x 2.6"
	LED-8039M40-A	LED-8039M40C-A	2983				4000K		✓	
	LED-8039M57-A	LED-8039M57C-A	3071				5700K		✓	
LED-8029E 24W	LED-8029E30-A	LED-8029E30C-A	3024	150W	24W	E26 Edison	3000K	✓		6.8" x 2.9"
	LED-8029E40-A	LED-8029E40C-A	3422				4000K	✓		
	LED-8029E57-A	LED-8029E57C-A	3425				5700K	✓		
LED-8029M 24W	LED-8029M30-A	LED-8029M30C-A	3431	150W	24W	EX39 Mogul	3000K	✓	✓	7" x 2.9"
	LED-8029M40-A	LED-8029M40C-A	3374				4000K	✓	✓	
	LED-8029M57-A	LED-8029M57C-A	3374				5700K	✓	✓	

>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY


DESCRIPTION	120-277V (NON-DIMMABLE) 120V ONLY (DIMMABLE)	LUMENS	REPLACES	LED POWER	BASE	CCT	ENERGY STAR	DIMENSIONS
LED-8015E 14W	LED-8015E30-G2	1792	70W (HID) 100W (INC)	14W	E26 Edison	3000K	✓	5.3" x 2.6"
	LED-8015E40-G2	1918				4000K	✓	
	LED-8015E50-G2	1960				5000K	✓	
LED-8017E 20W	LED-8017E30-G2	2540	100W (HID) 150W (INC)	20W	E26 Edison	3000K	✓	5.3" x 2.6"
	LED-8017E40-G2	2720				4000K	✓	
	LED-8017E50-G2	2760				5000K	✓	
LED-8017E 20W-DIM*	LED-8017E30-G2-DIM	2540	100W (HID) 150W (INC)	20W	E26 Edison	3000K	✓	5.3" x 2.6"
	LED-8017E40-G2-DIM	2720				4000K	✓	
	LED-8017E50-G2-DIM	2540				5000K	✓	
LED-8018E 25W	LED-8018E30-G2	3375	150W (HID) 200W (INC)	25W	E26 Edison	3000K	✓	6.3" x 3.2"
	LED-8018E40-G2	3525				4000K	✓	
	LED-8018E50-G2	3575				5000K	✓	
LED-8018M 25W	LED-8018M30-G2	3375	150W (HID) 200W (INC)	25W	EX39 Mogul	3000K		6.7" x 3.2"
	LED-8018M40-G2	3525				4000K		
	LED-8018M50-G2	3575				5000K		
LED-8019M 35W	LED-8019M30-G2	4400	175W (HID) 300W (INC)	35W	EX39 Mogul	3000K		6.9" x 3.7"
	LED-8019M30-G2	4400				4000K		
	LED-8019M30-G2	4690				5000K		

>80 CRI • E26 = 25,000 HOUR RATED LIFE / EX39 = 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY



8029 only

 E26 = 25,000 HOUR LIFE
EX39 = 50,000 HOUR LIFE

 THIS APPLIES TO THE NEW A21/A23
LAMPS ONLY.

 INC = INCANDESCENT
* 120V ONLY

SOX



Unique Lighting Solution Saves Time & Money

two kelvin temperatures
to choose from—
2200K or 4000K

- ▶ 20W, 35W, 60W and 100W models replacing up to 180W LPS SOX lamps
- ▶ Advanced active cooling provides excellent thermal management resulting in high light output and long life
- ▶ Directional light output delivers superior dark sky performance
- ▶ USA designed and specified internal LED driver
- ▶ Innovative aluminum heat sink with size options to fill entire fixture
- ▶ Support harness included



SPECIFICATIONS

Ballast Bypass – Internal Driver TYPE B								
DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	c US	DIMENSIONS
12" SOX 20W	LED-8100-22K	2030	35W	20W	B22	2200K	✓	12.1" x 2.7"
	LED-8100-40K	3022				4000K	✓	
16" SOX 35W	LED-8101-22K	3232	55W	35W	B22	2200K	✓	16.7" x 2.7"
	LED-8101-40K	5156				4000K	✓	
20" SOX 60W	LED-8102-22K	5769	90W	60W	B22	2200K	✓	20.5" x 2.7"
	LED-8102-40K	8198				4000K	✓	
43" SOX 100W	LED-8104-22K	11576	180W	100W	B22	2200K	✓	43.5" x 2.7"
	LED-8104-40K	15472				4000K	✓	

VOLTAGE: 120-277VAC • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

Ballast Bypass—Internal Driver

TYPE
B



All models feature top-mounted LEDs



Perfect retrofit for hazardous locations such as:

- Nuclear Reactor Sites
- Wastewater Treatment Plants
- Oil Refineries
- Oil Rigs
- Mine Tunnels



24W
LED-8929M-HAZ

Replaces up to 150W

Mogul base



24W
LED-8929E-HAZ

Replaces up to 150W

Edison base

Approved for **Hazardous Location: Class 1, Division 2**
See our website for a list of approved fixtures



SPECIFICATIONS

DESCRIPTION	120-277V	347V	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	CLASSIFIED	DIMENSIONS
LED-8929E 24W	LED-8929E57-HAZ	LED-8929E57C-HAZ	3400	150W	24W	E26 Edison	5700K	✓		6.75" x 2.9"
LED-8929M 24W	LED-8929M57-HAZ	LED-8929M57C-HAZ	3400	150W	24W	EX39 Mogul	5700K	✓	✓	7" x 2.9"


>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

Our latest pin-based LED retrofits are perfect for PL applications, and provide a long-lasting LED alternative for walls or recessed areas in offices, hotels, lobbies, schools, etc.



2-PIN


Compatible bases



OR

4-PIN

Compatible bases



HORIZONTAL

OMNI-DIRECTIONAL

VERTICAL



7W
LED-7311

Replaces up to 13W
G23-2 base

7W
LED-7312

Replaces up to 13W
GX23-2 base

7W
LED-7322

Replaces up to 26W
G24d base

11W
LED-7324-G3

Replaces up to 42W
G/GX24q base

11W
LED-7334

Replaces up to 26W
G/GX24q base



5W
LED-7300

Replaces up to 13W
GX23 base



10W *new!*
LED-7320-G3

Replaces up to 42W
G/GX24q base



10W
LED-7330

Replaces up to 26W
G/GX24q base

Type B Only
With both a telescoping horizontal and fixed vertical adapter included with each lamp

25W
LED-7342

Replaces up to 42W
G24q base



Type B Only
omni-directional mounting style.



23W
LED-7340

Replaces up to 42W
2G11 base



12W
LED-7318

Replaces up to 26W
G/GX24q base



12W
LED-7338

Replaces up to 26W
G/GX24q base



Also Available
LED-7319


Extender for 7318 and 7338

Type A = Ballast Compatible
Type A/B = Ballast Bypass 120-277V or Ballast Compatible
Type B = Ballast Bypass

SPECIFICATIONS

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	BEAM ANGLE	CCT	DIMENSIONS
LED-7300 5W 2-PIN UNIVERSAL TYPE A+B	LED-7300-27K-G2	500	13W	5W	GX23	360°	2700K	5.5" x 1.4"
	LED-7300-35K-G2	550					3500K	
	LED-7300-40K-G2	550					4000K	
LED-7311 7W 2-PIN UNIVERSAL TYPE A+B	LED-7311-27K-G2	815	13W	7W	G23-2	120°	2700K	5.8" x 1.4"
	LED-7311-35K-G2	883					3500K	
	LED-7311-40K-G2	892					4000K	
LED-7312 7W 2-PIN UNIVERSAL TYPE A+B	LED-7312-27K-G2	801	13W	7W	GX23-2	120°	2700K	5.8" x 1.4"
	LED-7312-35K-G2	899					3500K	
	LED-7312-40K-G2	914					4000K	
LED-7322 7W 2-PIN UNIVERSAL TYPE A+B	LED-7322-27K-G2	849	26W	7W	G24-d	120°	2700K	5.8" x 1.4"
	LED-7322-35K-G2	869					3500K	
	LED-7322-40K-G2	887					4000K	
LED-7320 10W 4-PIN UNIVERSAL TYPE A+B	LED-7320-27K-G3	1350	42W	10W	G/GX24-q	360°	2700K	7" x 1.4"
	LED-7320-35K-G3	1550					3500K	
	LED-7320-40K-G3	1600					4000K	
	LED-7320-50K-G3	1635					5000K	
LED-7330 10W 4-PIN BALLAST COMPATIBLE TYPE A	LED-7330-27K-G2	760	26W	10W	G/GX24-q	360°	2700K	6.2" x 1.4"
	LED-7330-35K-G2	850					3500K	
	LED-7330-40K-G2	916					4000K	
LED-7324 11W 4-PIN UNIVERSAL TYPE A+B	LED-7324-27K-G3	1050	42W	11W	G/GX24-q	360°	2700K	5.6" x 1.3"
	LED-7324-35K-G3	1125					3500K	
	LED-7324-40K-G3	1200					4000K	
	LED-7324-50K-G3	1200					5000K	
LED-7334 11W 4-PIN BALLAST COMPATIBLE TYPE A	LED-7334-27K-G2	974	26W	11W	G/GX24-q	120°	2700K	5.8" x 1.4"
	LED-7334-35K-G2	1057					3500K	
	LED-7334-40K-G2	1014					4000K	
LED-7318 12W 4-PIN UNIVERSAL TYPE A+B	LED-7318-27K-G2	837	26W	12W	G/GX24-q	120°	2700K	3.8" x 3"
	LED-7318-35K-G2	1157					3500K	
	LED-7318-40K-G2	1198					4000K	
LED-7338 12W 4-PIN BALLAST COMPATIBLE TYPE A	LED-7338-27K-G2	1100	26W	12W	G/GX24-q	120°	2700K	3.8" x 3"
	LED-7338-35K-G2	1100					3500K	
	LED-7338-40K-G2	1100					4000K	
LED-7340 23W 4-PIN BALLAST BYPASS TYPE B	LED-7340-30K-G2	2100	40W	17W	2G11	160°	42W	22" x 1.6"
	LED-7340-35K-G2	2100					42W	22" x 1.6"
	LED-7340-40K-G2	2200					42W	22" x 1.6"
LED-7342 25W 4-PIN BALLAST BYPASS TYPE B	LED-7342-27K-G2	2000	42W	25W	G24-q	140°	2700K	4.2" x 3.6"
	LED-7342-35K-G2	2500					3500K	
	LED-7342-40K-G2	2500					4000K	
LED-7319 12W 4-PIN UNIVERSAL TYPE A+B	LED-7319	Extender for 7318 and 7338			G24q/d			

NEW!





VOLTAGE: 120-277VAC • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

LINEAR T8/T5 TUBES



Energy-Saving Replacement
for Fluorescent T8 and T5 Tubes

Ballast Compatible*—Plug 'n Play **TYPE A**

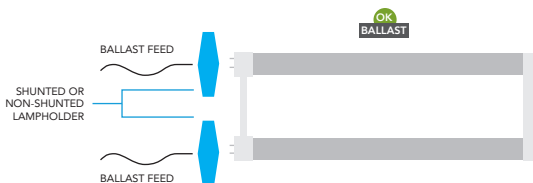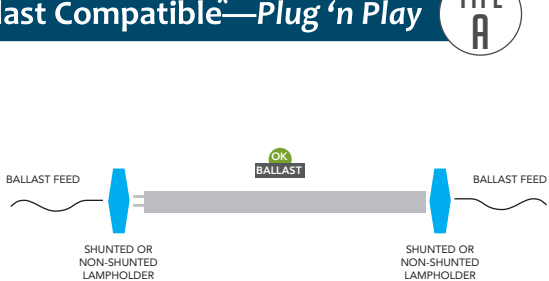

SPECIFICATIONS

Ballast Compatible* – Plug 'n Play | TYPE A

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	DIMENSIONS
2' T8 - 8W	LED-8T8-835BC24-G3	1200	17W	8W	G13	3500K	✓	23.7" x 1.1"
2' T8 - 8W	LED-9T8-840BC24-G3	1250	17W	8W	G13	4000K	✓	23.7" x 1.1"
2' T8 - 8W	LED-9T8-850BC24-G3	1250	17W	8W	G13	5000K	✓	23.7" x 1.1"
3' T8 - 10W	LED-10T8-835BC36-G3	1400	25W	10W	G13	3500K	✓	35.7" x 1.1"
3' T8 - 10W	LED-10T8-840BC36-G3	1450	25W	10W	G13	4000K	✓	35.7" x 1.1"
3' T8 - 10W	LED-10T8-850BC36-G3	1450	25W	10W	G13	5000K	✓	35.7" x 1.1"
4' T8 - 12W	LED-12T8-835BC48-G3	1700	32W	12W	G13	3500K	✓	47.7" x 1.1"
4' T8 - 12W	LED-12T8-840BC48-G3	1800	32W	12W	G13	4000K	✓	47.7" x 1.1"
4' T8 - 12W	LED-12T8-850BC48-G3	1800	32W	12W	G13	5000K	✓	47.7" x 1.1"
4' T8 - 15W	LED-15T8-835BC48-G3	2100	32W	15W	G13	3500K	✓	47.7" x 1.1"
4' T8 - 15W	LED-15T8-840BC48-G3	2200	32W	15W	G13	4000K	✓	47.7" x 1.1"
4' T8 - 15W	LED-15T8-850BC48-G3	2200	32W	15W	G13	5000K	✓	47.7" x 1.1"
2' T5 - 11W	LED-11T5HO-835BC24-G3	1350	24W	11W	G5	3500K	✓	23.7" x 1.1"
2' T5 - 11W	LED-11T5HO-840BC24-G3	1400	24W	11W	G5	4000K	✓	23.7" x 1.1"
2' T5 - 11W	LED-11T5HO-850BC24-G3	1400	24W	11W	G5	5000K	✓	23.7" x 1.1"
4' T5 HO - 25W	LED-25T5HO-835BC48-G3	3300	54W	25W	G5	3500K	✓	47.7" x 1.0"
4' T5 HO - 25W	LED-25T5HO-840BC48-G3	3500	54W	25W	G5	4000K	✓	47.7" x 1.0"
4' T5 HO - 25W	LED-25T5HO-850BC48-G3	3500	54W	25W	G5	5000K	✓	47.7" x 1.0"
2' T8U6-15W	LED-15U6-835BC-G3	2100	32W	15W	2G13	3500K	✓	22.5" x 7.0" x 1.1"
2' T8U6-15W	LED-15U6-840BC-G3	2200	32W	15W	2G13	4000K	✓	22.5" x 7.0" x 1.1"
2' T8U6-15W	LED-15U6-850BC-G3	2200	32W	15W	2G13	5000K	✓	22.5" x 7.0" x 1.1"


>80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

* Refer to ballast compatibility list on led-llc.com

Ballast Bypass—Internal Driver


TYPE B
Double-ended Power

Shunted or non-shunted lamp holder




Ballast Bypass – Internal Driver | TYPE B | DOUBLE-ENDED POWER

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	DIMENSIONS
2' T8 - 9W	LED-9T8-835DE24-G3	1100	17W	9W	G13	3500K	✓	23.7" x 1.1"
2' T8 - 9W	LED-9T8-840DE24-G3	1150	17W	9W	G13	4000K	✓	23.7" x 1.1"
2' T8 - 9W	LED-9T8-850DE24-G3	1150	17W	9W	G13	5000K	✓	23.7" x 1.1"
3' T8 - 12W	LED-12T8-835DE36-G3	1400	25W	12W	G13	3500K	✓	35.7" x 1.1"
3' T8 - 12W	LED-12T8-840DE36-G3	1450	25W	12W	G13	4000K	✓	35.7" x 1.1"
3' T8 - 12W	LED-12T8-850DE36-G3	1450	25W	12W	G13	5000K	✓	35.7" x 1.1"
4' T8 - 12W	LED-12T8-835DE48-G3	1700	32W	12W	G13	3500K	✓	47.7" x 1.1"
4' T8 - 12W	LED-12T8-840DE48-G3	1800	32W	12W	G13	4000K	✓	47.7" x 1.1"
4' T8 - 12W	LED-12T8-850DE48-G3	1800	32W	12W	G13	5000K	✓	47.7" x 1.1"
4' T8 - 15W	LED-15T8-835DE48-G3	2100	32W	15W	G13	3500K	✓	47.7" x 1.1"
4' T8 - 15W	LED-15T8-840DE48-G3	2200	32W	15W	G13	4000K	✓	47.7" x 1.1"
4' T8 - 15W	LED-15T8-850DE48-G3	2200	32W	15W	G13	5000K	✓	47.7" x 1.1"
8' T8 - 43W	LED-43T8-840B96-G3	5500	86W	43W	FA8	4000K	✓	93.4" x 1.1"
8' T8 - 43W	LED-43T8-850B96-G3	5500	86W	43W	FA8	5000K	✓	93.4" x 1.1"
8' T8 HO - 43W	LED-43T8HO-840B96-G3	5500	86W	43W	R17D	4000K	✓	93.4" x 1.1"
8' T8 HO - 43W	LED-43T8HO-850B96-G3	5500	86W	43W	R17D	5000K	✓	93.4" x 1.1"
4' T5 HO - 25W	LED-25T5HO-835DE48-G3	3300	54W	25W	G5	3500K	✓	47.7" x 1.0"
4' T5 HO - 25W	LED-25T5HO-840DE48-G3	3500	54W	25W	G5	4000K	✓	47.7" x 1.0"
4' T5 HO - 25W	LED-25T5HO-850DE48-G3	3500	54W	25W	G5	5000K	✓	47.7" x 1.0"



Ballast Bypass—Internal Driver

TYPE B
Single-ended Power | Non-shunted lamp holder


Ballast Bypass – Internal Driver | TYPE B | SINGLE-ENDED POWER

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	DIMENSIONS
4' T8 - 18W	LED-18T8-840SE48-G3	2200	32W	18W	G13	4000K	✓	47.7" x 1.0"
4' T8 - 18W	LED-18T8-850SE48-G3	2200	32W	18W	G13	5000K	✓	47.7" x 1.0"
2' T8U6-15W	LED-18U6-835SE-G3	2100	32W	18W	2G13	3500	✓	22.5" x 7.0" x 1.1"
2' T8U6-15W	LED-18U6-840SE-G3	2200	32W	18W	2G13	4000	✓	22.5" x 7.0" x 1.1"
2' T8U6-15W	LED-18U6-850SE-G3	2200	32W	18W	2G13	5000	✓	22.5" x 7.0" x 1.1"

INTRODUCING...

RemPhos by Light Efficient Design

We're bringing a new species of lighting to the Light Efficient Design family of LED products. With a focus on innovation and thoughtful LED lighting, our new RemPhos product offering enhances our commitment to *Powering the Switch to LED...ALL WAYS.*

Our newest line of LED retrofit kits and fixtures includes products featuring RemPhos innovative "FLEX" technologies.


flexCOLOR
choose from 3 different
color temperatures

flexWATT
4 wattages
in one product

flexCONTROL
order without controls,
basic or advanced control

One piece design. Easy Install.

NEW!

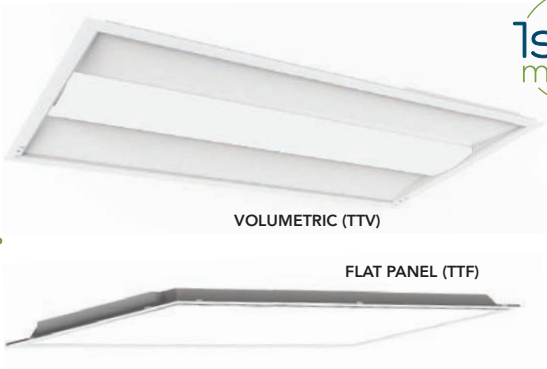

1st to market

to have the ability to be installed as a retrofit kit or as a new fixture

- ▶ is a door style retrofit kit with just one piece, creating a seamless, no air gap look
- ▶ you can choose from a volumetric or a flat panel design

10
YEAR
WARRANTY

TROFFER TRANSFORMER SPECIFICATIONS

NEW!

NEW!

PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS (FLEX)	WATT (FLEX)	CCT OPTIONS	CONTROLLER/OCCUPANCY SENSOR	ETL	RECS	DIMENSIONS
RP-TTV-G1	2x2 Troffer Transformer Volumetric	RP-TTV-G1-2X2-20L-840-FWFC	2032	16W (16-28W)	3500/4000/5000K	OPTIONAL	✓	✓	23.75" x 23.75"
	1x4 Troffer Transformer Volumetric	RP-TTV-G1-1X4-20L-840-FWFC	2480	20W (16-28W)	3500/4000/5000K	OPTIONAL	✓	✓	11.75" x 47.75"
	2x4 Troffer Transformer Volumetric	RP-TTV-G1-2X4-20L-840-FWFC	3390	26W (20-40W)	3500/4000/5000K	OPTIONAL	✓	✓	23.75" x 47.75"
RP-TTF-G1	2x2 Troffer Transformer Flat Panel	RP-TTF-G1-2X2-20L-840-FWFC	2032	16W (16-28W)	3500/4000/5000K	OPTIONAL	✓	✓	23.75" x 23.75"
	1x4 Troffer Transformer Flat Panel	RP-TTF-G1-1X4-20L-840-FWFC	2480	20W (16-28W)	3500/4000/5000K	OPTIONAL	✓	✓	11.75" x 47.75"
	2x4 Troffer Transformer Flat Panel	RP-TTF-G1-2X4-20L-840-FWFC	3390	26W (20-40W)	3500/4000/5000K	OPTIONAL	✓	✓	23.75" x 47.75"

VOLTAGE: 120-277VAC • 85 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY


Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT:
1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. 2. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.

5 styles. 4 lumen packages. 3 color temperatures. 2 control options.
1 perfect solution for all your drum, linear + sconce retrofit needs.

9IN

LEDCR-G2


6W, **10W**, 16W, 22W
3000°K, 3500°K, **4000°K**
(expandable LED boards)

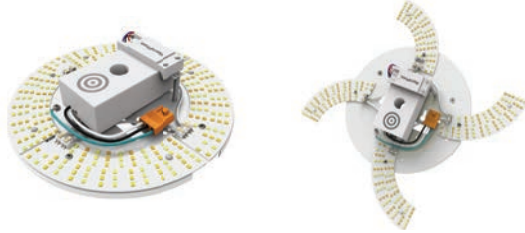

4IN

LEDSR-G2

6W, 10W, 12W, 15W
3000°K, 3500°K, **4000°K**
(expandable LED boards)

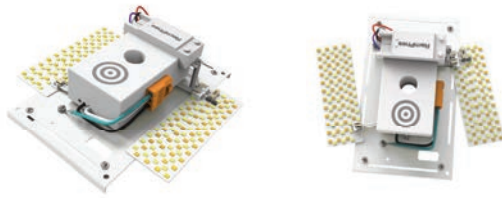

14INE

LEDSR-G2

6W, 10W, 12W, 15W
3000°K, 3500°K, **4000°K**
(fixed LED boards)



9IN

LEDSR-G2

6W, 10W, 12W, 15W
3000°K, 3500°K, **4000°K**
(fixed LED boards)



14INM

LEDSR-G2

6W, 10W, 12W, 15W
3000°K, 3500°K, **4000°K**
(fixed LED boards)



Optional integrated high/low motion and daylight sensor. Completely adjustable and hidden behind the fixture lens

Retrofit these fixtures & more



SURFACE MOUNTS



VANITIES/LINEARS



WALL MOUNTS

DRUM/SCONCE/VANITY RETROFIT SPECIFICATIONS

PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS (FLEX)	WATT (FLEX)	CCT OPTIONS	CONTROLLER/OCCUPANCY SENSOR	ETL	Energy Star	DIMENSIONS
LEDCR-G2 10W	9" Circular Drum Retrofit	RPT-P-LEDCR-G2-9IN-14L-840-FWFC	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	NO	✓	✓	8.7" x 8.7" x 2"
	9" Circular Drum Retrofit w/Occ Sensor	RPT-P-LEDCR-G2-9IN-14L-840-FWFC-OCC	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	YES	✓	✓	8.7" x 8.7" x 2"
LEDSR-G2 6W	4" Sconce Retrofit	RPT-P-LEDSR-G2-4IN-8L-840-FWFC	816 (780-2130)	6W (6-15W)	3000/3500/4000K	NO	✓	✓	6.5" x 7" x 2.1"
	4" Sconce Retrofit w/Occ Sensor	RPT-P-LEDSR-G2-4IN-8L-840-FWFC-OCC	816 (780-2130)	6W (6-15W)	3000/3500/4000K	YES	✓	✓	6.5" x 7" x 2.1"
	9" Sconce Retrofit	RPT-P-LEDSR-G2-9IN-8L-840-FWFC	816 (780-2130)	6W (6-15W)	3000/3500/4000K	NO	✓	✓	8.7" x 4.5" x 2"
	9" Sconce Retrofit w/Occ Sensor	RPT-P-LEDSR-G2-9IN-8L-840-FWFC-OCC	816 (780-2130)	6W (6-15W)	3000/3500/4000K	YES	✓	✓	8.7" x 4.5" x 2"
	14" Vanity Retrofit (End Mnt Drv)	RPT-P-LEDSR-G2-14INE-8L-840-FWFC	816 (780-2130)	6W (6-15W)	3000/3500/4000K	NO	✓	✓	14" x 2.7" x 2.1"
	14" Vanity Retrofit (End Mnt Drv) w/Occ Sensor	RPT-P-LEDSR-G2-14INE-8L-840-FWFC-OCC	816 (780-2130)	6W (6-15W)	3000/3500/4000K	YES	✓	✓	14" x 2.7" x 2.1"
	14" Vanity Retrofit (Mid Mnt Drv)	RPT-P-LEDSR-G2-14INM-8L-840-FWFC	816 (780-2130)	6W (6-15W)	3000/3500/4000K	NO	✓	✓	14" x 2.7" x 2.1"
	14" Vanity Retrofit (Mid Mnt Drv) w/Occ Sensor	RPT-P-LEDSR-G2-14INM-8L-840-FWFC-OCC	816 (780-2130)	6W (6-15W)	3000/3500/4000K	YES	✓	✓	14" x 2.7" x 2.1"

VOLTAGE: 120-277VAC • 85 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY



Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT:
1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. 2. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.

LINEAR BARKITS

Perfect for Linear and general purpose, Strips & Wraps, Troffers, Vapor Tights, Low bay and High bay, Coves and Soffits, Stairwells

One light. Unlimited possibilities.

ETL and DLC listed as both a retrofit kit and a fixture.

available in both
BASE & PRO

INTERNAL
DRIVER

6W-25W
RP-LBI

available in 2ft,
3ft, 4ft lengths


2.5W-20W/per bar
(10W-80W kit)

RPT-BARKITJ

available in 2ft,
3ft, 4ft lengths

EXTERNAL DRIVER

LBI ACCESSORIES (SOLD SEPARATELY UNLESS NOTED OTHERWISE)

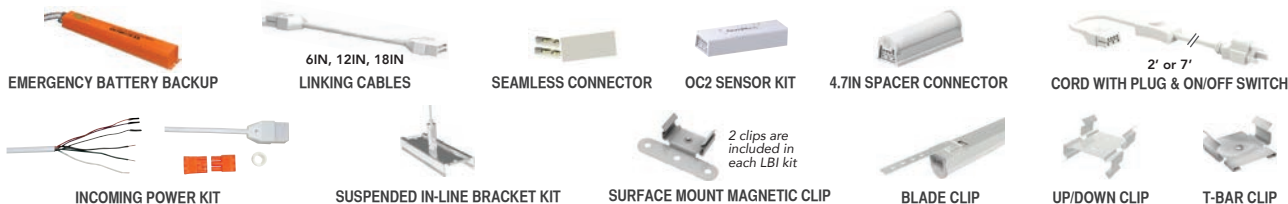

LINEAR BARKIT SPECIFICATIONS

PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS (FLEX)	WATT (FLEX)	CCT OPTIONS	ETL US	DIMENSIONS
PRO LED BARKIT INTERNAL DRIVER	2' PRO Internal Drive Light Bar	RP-LBI-G1-2F-6W-40K-WC	780-1560	6W (6-12W)	3500/4000/5000K	✓	1.2" x 1.2" x 19.3"
	2' PRO Warm CCT Internal Drive Light Bar	RP-LBI-G1-2F-6W-27K-WC2	696-1524	6W (6-12W)	2700/3000/3500K	✓	1.2" x 1.2" x 19.3"
	3' PRO Internal Drive Light Bar	RP-LBI-G1-3F-10W-40K-WC	1400-2100	10W (10-15W)	3500/4000/5000K	✓	1.2" x 1.2" x 31.3"
	3' PRO Warm CCT Internal Drive Light Bar	RP-LBI-G1-3F-10W-27K-WC2	1270-1890	10W (10-15W)	2700/3000/3500K	✓	1.2" x 1.2" x 31.3"
	4' PRO Internal Drive Light Bar	RP-LBI-G1-4F-15W-40K-WC	1370-3425	15W (10-25W)	3500/4000/5000K	✓	1.2" x 1.2" x 43.3"
	4' PRO Warm CCT Internal Drive Light Bar	RP-LBI-G1-4F-15W-27K-WC2	1260-3400	15W (10-25W)	2700/3000/3500K	✓	1.2" x 1.2" x 43.3"
VOLTAGE: 120-277VAC • 80+ CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY							

Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT:
1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. 2. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.

PRODUCT	DESCRIPTION	RemPhos Part #	LUMENS	WATT	CCT	ETL US	DIMENSIONS
BASE LED BARKIT INTERNAL DRIVER	4' BASE Internal Drive Light Bar	RP-LBI-G1-4F-15W-40K-B	2325	15W	4000	✓	1.2" x 1.2" x 43.3"
VOLTAGE: 120-277VAC • 80+ CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY							

PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS	WATT	CCT OPTIONS	UL LISTED	DIMENSIONS
LED BARKITJ EXTERNAL DRIVER	One 4' Bar & One 15W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-15W-4FT-1L-840	1950	15W	4000	✓	44.4" X 1" X 1"
	Two 4' Bars & One 20W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-30W-4FT-2L-840	3900	30W	4000	✓	44.4" X 1" X 1"
	Three 4' Bars & One 40W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-40W-4FT-3L-840	5200	40W	4000	✓	34.3" X 1" X 1"
	Four 4' Bars & One 60W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-60W-4FT-4L-840	7800	60W	4000	✓	34.3" X 1" X 1"
	One 2' Bar & One 10W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-10W-2FT-1L-840	1300	10W	4000	✓	21.7" X 1" X 1"
	Two 2' Bars & One 20W Driver, LED Bar Kit	RPT-P-LEDBARKITJ-20W-2FT-2L-840	2600	20W	4000	✓	21.7" X 1" X 1"
	90 Min Battery Backup Kit	RPT-ACCESSORY-EMGKIT-HS1-500LM	500	<4W	4000	✓	
	90 Min Battery Backup Kit	RPT-ACCESSORY-EMGKIT-HS1-1000LM	1000	<4W	4000	✓	
VOLTAGE: 120-277VAC • 80+ CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY							


Perfect for High Bays, Floodlights, Wall Packs, Shoe Box

Directional 180° HID Retrofit Kit

This high-power LED Block G3 retrofit module replaces HID, HPS or MH lamps, and comes with our next generation mounting bracket system that can be used in either vertical or horizontal orientation.

30W-280W

Replaces up to 1000W

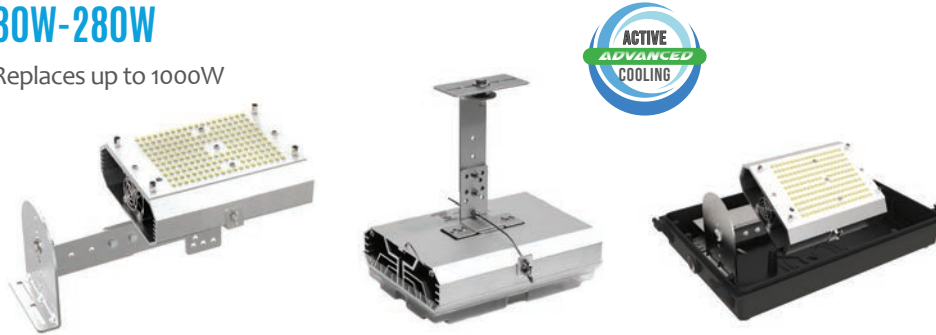

CHECK OUT THE RPT MODELS BELOW FOR ULTIMATE FLEXIBILITY AND EVEN MORE FEATURES

LEDBLOCK® SPECIFICATIONS

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	GCT	ETL US	DIMENSIONS
LED BLOCK KITS	LED-8150-50K	20565	400W	150W	NA	5000K	✓	11.8" x 6.4" x 5.1"
	LED-8280-50K	38765	1000W	280W	NA	5000K	✓	16.9" x 10.5" x 6.1"
	LED-8280-50K-HV (480V)	38765	1000W	280W	NA	5000K	✓	16.9" x 10.5" x 6.1"
VOLTAGE: 120-277VAC • >70 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY (LED-8150-8280)								

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	GCT	ETL US	DIMENSIONS
RPT BLOCK KITS	RPT-LEDBLOCK-65L-750 -10VDIM-G3	5100	175W	30W	N/A	5000K	✓	4.7" x 4.7"
	RPT-LEDBLOCK-100L-750 -10VDIM-G3	8850	250W	52W	N/A	5000K	✓	4.7" x 4.7"
	RPT-LEDBLOCK-150L-750 -10VDIM-G3	15700	400W	100W	N/A	5000K	✓	5.1" x 6.1"
	RPT-LEDBLOCK-200L-750 -10VDIM-G3	20000	400W	110W	N/A	5000K	✓	5.1" x 6.1"
	RPT-LEDBLOCK-300L-750 -10VDIM-G3	24000	>400W	150W	N/A	5000K	✓	7.9" x 5.9"
	RPT-LEDBLOCK-400L-750 -10VDIM-G3	43000	1000W	277W	N/A	5000K	✓	10.6" x 10"
VOLTAGE: 120-277VAC • >70 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY (RPT-LEDBLOCK-G3)								



ACCESSORIES SPECIFICATIONS

DESCRIPTION	MODEL #	TYPE	MAX WATTAGE	INPUT/OUTPUT VOLTAGE	THD	POWER FACTOR	DIMENSIONS
STEP DOWN TRANSFORMERS	MTM04506227C	450VA Stepdown transformer	400W	480/347V in 277V out	3.4% 3.8%	0.99	4.2" x 2.7" x 2.2"
	MTM01606227C	160VA Stepdown transformer	150W	480/347V in 277V out	4.3% 4.1%	0.99	4.2" x 2.0" x 1.6"
	MTM00506224C	50VA Stepdown transformer	45W	480/347V in 240V out	6.2% 6.7%	0.98 0.97	3.0" x 1.7" x 1.4"

HIGH BAY

High Output LED Performance in a Self-Contained High Bay Luminaire



150W
LED-9150
Replaces up to 400W



300W
LED-9300
Replaces up to 1000W

Diffuser Lens Now Included

- ▶ High efficacy >125 LPW
- ▶ High foot candles:
 - 150W - 5.5FC @ 34'
 - 300W - 5.5FC @ 51'
- ▶ Hanging cables included
- ▶ 6' power cord with stripped leads included

HIGH BAY LUMINAIRE SPECIFICATIONS

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	DIMENSIONS
150W HIGH BAY	LED-9150-50K	18780	400W	150W	NA	5000K	✓	23.8" x 23.8" x 2.8"
300W HIGH BAY	LED-9300-50K	38533	1000W	300W	NA	5000K	✓	48" x 23.8" x 2.8"

VOLTAGE: 120-277VAC • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY

HIGH TEMPERATURE HIGH BAY


Superior performance in extreme environments. 176°F ambient rating, suitable for foundries, steel mills, smelters and other demanding applications.

150W
RP-HTHB
Replaces up to 400W HID



DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	VOLTAGE	CCT	UL LISTED	DIMENSIONS
150W HIGH TEMP HIGH BAY	RP-HTHB-21L-50K	>21000	400W	150W	120-277	5000K	✓	22" x 10.2"
150W (HIGH VOLTAGE) HIGH TEMP HIGH BAY	RP-HTHB-21L-50K-HV	>21000	400W	150W	347-480	5000K	✓	22" x 10.2"

70 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY



PRODUCT	DESCRIPTION	RemPhos Part #
HIGH TEMP HIGH BAY ACCESSORIES	60° Reflector for High Temp High Bay	RP-HTBH-REFLECTOR-60DEG
	Junction Box for High Temp High Bay	RP-HTBH-JBOX
	JBox Bracket for High Temp High Bay	RP-HTBH-JBOXBRACKET
	Trunnion Bracket for High Temp High Bay	RP-HTBH-TRUNBRACKET

Highest in class LPW. Patented “v-groove” bracket mounting allows for a fast and easy installation.



300W
LEDAL-400L
replaces 1200W MH system



240W
LEDAL-200L, 270L, 330L
replaces 1000W MH system



100W
LEDAL-75L, 120L, 140L
replaces 400W MH system

Available
Mounting
Brackets



LED AREA LIGHT SPECIFICATIONS

PRODUCT	DESCRIPTION	RemPhos Part #	LUMENS	REPLACES	WATT	CCT	DIMENSIONS
LED AREA LIGHTS	50W LED AREA LIGHT	RPT-P-LEDAL-G2-75L-840-STD-T3-DB	7500	200W	50W	4000K	15.7" X 15.3" X 3.4"
	80W LED AREA LIGHT	RPT-P-LEDAL-G2-120L-840-STD-T3-DB	12000	300W	80W	4000K	15.7" X 15.3" X 3.4"
	100W LED AREA LIGHT	RPT-P-LEDAL-G2-140L-840-STD-T3-DB	14000	400W	100W	4000K	15.7" X 15.3" X 3.4"
	150W LED AREA LIGHT	RPT-P-LEDAL-G2-200L-840-STD-T3-DB	20000	600W	150W	4000K	21.6" X 15.3" X 3.4"
	200W LED AREA LIGHT	RPT-P-LEDAL-G2-270L-840-STD-T3-DB	27000	800W	200W	4000K	21.6" X 15.3" X 3.4"
	240W LED AREA LIGHT	RPT-P-LEDAL-G2-330L-840-STD-T3-DB	33000	1000W	240W	4000K	21.6" X 15.3" X 3.4"
	300W LED AREA LIGHT	RPT-P-LEDAL-G2-400L-840-STD-T3-DB	40000	1200W	300W	4000K	27.5" X 15.3" X 3.4"

>80 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY



PRODUCT	DESCRIPTION	RemPhos Part #
LED AREA LIGHT ACCESSORIES	Adjustable Slip-Fitter Bracket, Dark Bronze	RP-AL-BKT-A-DB-G2
	Square and Round Pole Bracket, Dark Bronze	RP-AL-BKT-B-DB-G2
	Trunnion Bracket, Dark Bronze	RP-AL-BKT-C-DB-G2
	Wall Mount Bracket, Dark Bronze	RP-AL-BKT-F-DB-G2

STAIRWELL & CORRIDOR

LED Linear Stairwell & Corridor Fixture featuring RemPhos' FlexWatt + FlexColor + FlexControl + FlexFixture




EXTRA WIDE
6" WIDTH TO COVER
OLD FOOTPRINT

2FT, 3FT, 4FT


LIVC G2

10W-40W

3000°K, 3500°K, 4000°K



LED STAIRWELL/CORRIDOR LUMINAIRE SPECIFICATIONS

PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS (FLEX)	WATT (FLEX)	CCT OPTIONS	CONTROLLER/OCCUPANCY SENSOR		DIMENSIONS
STAIRWELL/ CORRIDOR LUMINAIRE	24" Corridor/Stairway	RPT-P-LIVC-G2-2FT-20L-840-FWFC-R-S1	1994 (1267-4099)	15W (10-30W)	3000/3500/ 4000K	NO	✓	4.2" x 6" x 23"
	24" Corridor/Stairway w/Occ Sensor	RPT-P-LIVC-G2-2FT-20L-840-FWFC-OCC-R-S1	1994 (1267-4099)	15W (10-30W)	3000/3500/ 4000K	YES	✓	4.2" x 6" x 23"
	36" Corridor/Stairway	RPT-P-LIVC-G2-3FT-20L-840-FWFC-R-S1	1994 (1267-4099)	15W (10-30W)	3000/3500/ 4000K	NO	✓	4.2" x 6" x 34"
	36" Corridor/Stairway w/Occ Sensor	RPT-P-LIVC-G2-3FT-20L-840-FWFC-OCC-R-S1	1994 (1267-4099)	15W (10-30W)	3000/3500/ 4000K	YES	✓	4.2" x 6" x 34"
	48" Corridor/Stairway	RPT-P-LIVC-G2-4FT-20L-840-FWFC-R-S1	1994 (1267-5329)	15W (10-40W)	3000/3500/ 4000K	NO	✓	4.2" x 6" x 46"
	48" Corridor/Stairway w/Occ Sensor	RPT-P-LIVC-G2-4FT-20L-840-FWFC-OCC-R-S1	1994 (1267-5329)	15W (10-40W)	3000/3500/ 4000K	YES	✓	4.2" x 6" x 46"

VOLTAGE: 120-277VAC • 85 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY




Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT:

1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. 2. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.

flexCOLOR + **flex**WATT
choose from 3 different color temperatures + 4 wattages in one product

+
flexCONTROL
order without controls, basic or advanced control

Control options

<p>CONTROL READY</p>  <p>All LIVC G2 models come standard as factory enabled to add controls at the factory, in the field or at a later date. Driver comes with 10V dimming and 12V DC power wiring.</p>	<p>BASIC CONTROL</p>  <p>Integrated high frequency, high/low motion and daylight hold-off sensor. Can be mounted behind glass or plastic lens. Contact us for more details.</p> <p>ORDERING CODES SENSOR = OCC REMOTE CONTROL = REMOTE-IR12</p>	<p>ADVANCED WIRELESS CONTROL</p>  <p>We partner with Magnum, avi-on, Philips, Lutron and other intelligent wireless lighting control systems. Contact us for more details.</p> <p>CONTACT US FOR ORDERING CODES</p>
--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

+

NEW!

flexFIXTURE

use as a stairwell, strip, vanity or continuous run fixture

Multiple end cap trims available allowing for the LIVC G2 to be used in so many places!

 <p>SECURITY END CAP White metal end cap transforms LIVC into vandal & tamper resistant fixture RPT-P-LIVC-G2-ENDCAP-SECURITY1</p>	 <p>MODERN1 END CAP Single bar brushed-nickel metal end cap creates a premium elegant look RPT-P-LIVC-G2-ENDCAP-MODERN1</p>	 <p>MODERN2 END CAP Double bar brushed-nickel metal end cap creates a premium elegant look RPT-P-LIVC-G2-ENDCAP-MODERN2</p>
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

CEILING LUMINAIRES

Surface mount LED drum fixtures featuring RemPhos' FlexWatt + FlexColor + FlexControl Technologies.

Powered by the LEDCR G2 Light Engine see page 21



NEW!



14IN, 18IN
Designer Drum G2
6W, **10W**, 16W, 22W
3000°K, **3500°K**, 4000°K




11IN, 14IN
Utility Drum G2
6W, **10W**, 16W, 22W
3000°K, **3500°K**, 4000°K

11IN

Designer Sconce G2
6W, **10W**, 16W, 22W
3000°K, **3500°K**, 4000°K



Powered by the LEDSR G2 Light Engine see page 21



12IN
Outdoor Drum G2
6W, **10W**, 16W, 22W
3000°K, **3500°K**, 4000°K



13IN
Tough Drum G2
6W, **10W**, 16W, 22W
3000°K, **3500°K**, 4000°K



15IN
Glass Drum G2
6W, **10W**, 16W, 22W
3000°K, **3500°K**, 4000°K


LED DRUM SPECIFICATIONS

PRODUCT	DESCRIPTION	RemPhos DLC Part #	LUMENS (FLEX)	WATT (FLEX)	CCT OPTIONS	CONTROLLER/OCCUPANCY SENSOR	ETL US	ENERGY STAR	DIMENSIONS
LED DRUM	11" Utility Drum Luminaire	RP-DRU-11N-14L-40K-WC-G2-A	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	NO	✓	✓	3.5" x 11"
	11" Utility Drum Luminaire w/OCC Sensor	RP-DRU-11N-14L-40K-WC-G2-OC1-A	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	YES	✓	✓	3.5" x 14"
	14" Utility Drum Luminaire	RP-DRU-14N-14L-40K-WC-G2-A	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	NO	✓	✓	3.5" x 11"
	14" Utility Drum Luminaire w/OCC Sensor	RP-DRU-14N-14L-40K-WC-G2-OC1-A	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	YES	✓	✓	3.5" x 14"
	14" Designer Drum Luminaire	RP-DRD-14N-14L-40K-WC-G2-A	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	NO	✓	✓	3.5" x 14"
	14" Designer Drum Luminaire w/OCC Sensor	RP-DRD-14N-14L-40K-WC-G2-OC1-A	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	YES	✓	✓	3.5" x 14"
	18" Designer Drum Luminaire	RP-DRD-18N-14L-40K-WC-G2-A	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	NO	✓	✓	3.5" x 18"
	18" Designer Drum Luminaire w/OCC Sensor	RP-DRD-18N-14L-40K-WC-G2-OC1-A	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	YES	✓	✓	3.5" x 18"
	12" Outdoor Drum	RP-DRO-12N-14L-40K-WC-G2	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	NO	✓	✓	4" x 12"
	12" Outdoor Drum w/OCC Sensor	RP-DRO-12N-14L-40K-WC-G2-OC1	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	YES	✓	✓	4" x 12"
	13" Tough Drum	RP-DRT-13N-14L-40K-WC-G2	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	NO	✓	✓	3.75" x 13"
	13" Tough Drum w/OCC Sensor	RP-DRT-13N-14L-40K-WC-G2-OC1	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	YES	✓	✓	3.75" x 13"
	15" Glass Drum	RP-DRG-15N-14L-40K-WC-G2	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	NO	✓	✓	7" x 15"
	15" Glass Drum w/OCC Sensor	RP-DRG-15N-14L-40K-WC-G2-OC1	1370 (780-3124)	10W (6-22W)	3000/3500/4000K	YES	✓	✓	7" x 15"
LED SCONCE	11" Utility Sconce Luminaire	RP-SCD-11N-8L-40K-WC-G2	816 (780-2130)	6W (6-22W)	3000/3500/4000K	NO	✓	✓	3.5" x 18"
	11" Utility Sconce Luminaire w/OCC Sensor	RP-SCD-11N-8L-40K-WC-G2-OC1	816 (780-2130)	6W (6-22W)	3000/3500/4000K	YES	✓	✓	3.5" x 18"

VOLTAGE: 120-277VAC • 85 CRI • 100,000 HOUR RATED LIFE • 10 YEAR WARRANTY

Default lumen package (wattage and CCT) are shown above in bold. There are two ways to achieve a non-default lumen package and/or CCT:
1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. 2. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.



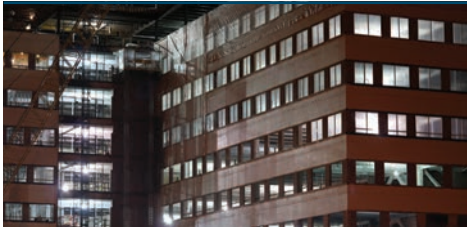

120V Temporary Work Site Lights!

Super bright and durable, our LED work site lights reduce costs and labor with an integrated power cord and daisy-chain feature.



60W
LED-9006
Replaces up to 250W
20' power cord
Connect up to 10 lights together



100W
LED-9010
Replaces up to 400W
35' power cord
Connect up to 6 lights together



150W
LED-9015
Replaces up to 600W
35' power cord
Connect up to 4 lights together



100W **NEW!**
LED-9009-5C
Replaces up to 400W
clear lens
10' power cord
Connect up to 6 lights together

40W
(8W x 5 lights) **NEW!**
LED-9003
Replaces up to 360W Incandescent
50' string length



100W **NEW!**
LED-9009-5F
Replaces up to 400W
frosted lens
10' power cord
Connect up to 6 lights together

SPECIFICATIONS

DESCRIPTION	MODEL #	LUMENS	REPLACES	LED POWER	BASE	CCT	UL LISTED	ETL LISTED	DIMENSIONS
NEW! WORK LIGHT 5-PACK	LED-9003-50K-5PK	5000	360W	40W (8Wx5)	NA	5000K		✓	3.0" x 4.4"
WORK LIGHT w/20' CORD	LED-9006-50K	6600	250W	60W	NA	5000K	✓		10.8" x 6.5"
WORK LIGHT w/35' CORD	LED-9010-50K	11000	400W	100W	NA	5000K	✓		12.2" x 6.5"
WORK LIGHT w/35' CORD	LED-9015-50K	16500	600W	150W	NA	5000K	✓		13.4" x 6.2"
NEW! ECONOMY WORK LIGHT (CLEAR LENS)	LED-9009-100-5C	12000	400W	100W	NA	5000K	✓		11.3" x 6.5"
NEW! ECONOMY WORK LIGHT (FROSTED LENS)	LED-9009-100-5F	9500	400W	100W	NA	5000K	✓		11.3" x 6.5"

VOLTAGE: 120 • >80 CRI • 50,000 HOUR RATED LIFE • 5 YEAR WARRANTY*

* LED-9003 is covered by a 3 year warranty.

SOLAR LIGHTS



Go completely off-grid or use a combination of solar power & line voltage with our all new 'Solera Hybrid' fixture. All-in-one design, solar panel and battery are built into the LED fixture.



7W, 15W
RP-SWL
 7W comparable to 50W
 15W comparable to 100W



8W, 30W
RP-SAL
 8W comparable to 70W
 30W comparable to 250W



20W
RP-SFL **new!**
 20W comparable to 150W



20W
RP-SPT **new!**
 20W comparable to 150W

SOLAR SPECIFICATIONS


DESCRIPTION	RemPhos Part #	LUMENS	COMPARABLE TO	WATT	CCT	DIMENSIONS
7W SOLAR WALL PACK	RP-SWL-7W-40K-BK-G1	700	50W	7W	4000K	9.2" X 7.5" X 4"
15W SOLAR WALL PACK	RP-SWL-15W-40K-BK-G1	1500	100W	15W	4000K	12.2" X 10.2" X 5"
8W SOLAR AREA LIGHT	RP-SAL-8W-50K-SF-GY-G1	1000	70W	8W	5000K	20" X 11.6" X 3.3"
30W SOLAR AREA LIGHT	RP-SAL-30W-50K-SF-GY-G1	6000	250W	30W	5000K	36" X 16.7" X 3.7"
20W SOLAR FLOOD LIGHT	RP-SFL-20W-40K-BK-G1	2000	150W	20W	4000K	16.3 - 21.1" X 28.5" X 10.5"
20W SOLAR POST TOP FIXTURE	RP-SPT-20W-40K-SF-G1	2000	150W	20W	4000K	31.8" X 16.4"
20W SOLAR DISPLAY LIGHT	RP-SDL-20W-40K-BK-G1	2000	150W	20W	4000K	3.8" X 3.8" X 46"
2W BOLLARD FIXTURE	RP-SBL-2W-40K-BK-G1	266	30W	2W	4000K	29.9" X 10.2"
1W SOLAR STEP LIGHT	RP-SSL-1W-40K-BK-G1	20	20W	<1W	4000K	7.9" X 4.8" X 2.5"
4W SOLAR WALL MOUNT LIGHT	RP-SML-4W-40K-BK-G1	400	35W	4W	4000K	8.4" X 5.3" X 2.9"

new!


HYBRID SOLAR SPECIFICATIONS

DESCRIPTION	RemPhos Part #	LUMENS	COMPARABLE TO	WATT	CCT	DIMENSIONS
30W SOLAR HYBRID LIGHT	SL-SAL-HYB-30W-40K-SF-BK-G1	5900	250W	30W	4000K	see spec sheet

new!

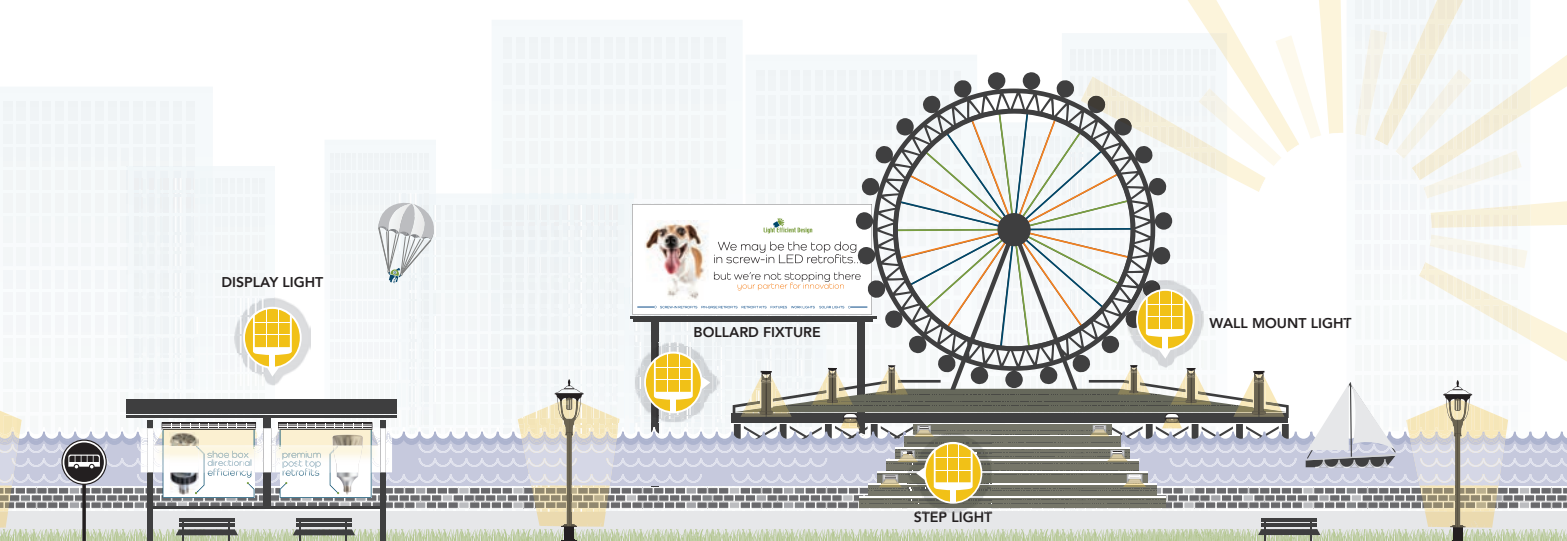

20W
RP-SDL **NEW!**
 20W comparable to 150W




2W
RP-SBL **NEW!**
 2W comparable to 30W



4W
RP-SML
 comparable to 35W



1W
RP-SSL
 comparable to 20W



30W
RP-SAL-HYB
 30W comparable to 250W

SOLAR AREA LIGHT ACCESSORIES

DESCRIPTION	RemPhos Part #
REMOTE (ORDER ONLY IF EXTRA IS NEEDED)	RP-SAL-REMOTE-G1
SPECIAL TURTLE FRIENDLY COLOR TEMP ADDER	-AMBER
8W REPLACEMENT BATTERY	RP-SAL-BTRY-8W
30W REPLACEMENT BATTERY	RP-SAL-BTRY-30W
ROUND POLE BRACKET FOR 8W	RP-SAL-BKT-8W-RP-G1
SQUARE POLE BRACKET FOR 8W	RP-SAL-BKT-8W-SP-G1
TRUNNION BRACKET FOR 8W	RP-SAL-BKT-8W-TN-G1
ROUND POLE BRACKET FOR 30W	RP-SAL-BKT-30W-RP-G1
SQUARE POLE BRACKET FOR 30W	RP-SAL-BKT-30W-SP-G1
TRUNNION BRACKET FOR 30W	RP-SAL-BKT-30W-TN-G1



SAL-REMOTE
 motion sensor and time control are programmable via remote



Round Pole Bracket (RP)



Adj. Slip-Filter Bracket (SF)



Square Pole Bracket (SP)



Trunnion Bracket (TN)

INCLUDED IN QUICK SHIP MODELS

SOLAR DISPLAY LIGHT ACCESSORIES

NEW!

DESCRIPTION	RemPhos Part #
7.5" LONG ARM BRACKET	RP-SDL-B1L-LB-G1

Find Your Sales Representative



- | | | | |
|------------------------------------------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| 1 Arctic Sales – AK
907-694-7424 | 11 Mountain States Agency – NM
505-867-5805 | 19 Martin Electrical Sales – E. MO
314-966-8659 | 27 New Century Sales – IN
317-334-9697 |
| 2A Hallmarketing – WA
425-686-5531 | 12A Electra Sales – N. TX
972-554-8200 | 20 Electra Sales AR – AR/N. MS/W. TN
501-523-4015 | 28 Team Electrical – MI
313-874-1000 |
| 2B Hallmarketing – OR
503-708-7601 | 12B ETEL – S. TX
713-678-4460 - Houston
210-829-7153 - San Antonio
512-914-0858 - Austin | 21 SMR Gulf Coast – LA/S. MS
281-774-3751 | 29 Paolicelli & Assoc. – PA/WV
412-276-8816 |
| 3 Sales Lane llc – CA/N. NV
904-404-1670 | 13 Electra Sales – OK
405-543-1924 | 22A IM Sales – AL/FL Panhandle
205-936-8513 | 30 Electrical Sales Assoc. – VA
804-282-1864 |
| 4 Deco Sales – S. NV
702-257-8075 | 14 RB Sales Corp. – KS/W. MO
816-350-1114 | 22B Bishop & Brogdon – GA
404-494-4333 | 31 Colerick – MD/W. DC
410-421-9511 |
| 7 Hallmarketing – N. ID
503-708-7601 | 15 RB Sales Corp. – IA/NE/W. IL
319-373-8877 | 23 Gorin Cockrell McCoy – FL
800-241-8657 | 32 Synergy Elec. Sales – E. PA/S. NJ/DE
215-428-1130 |
| 8 Wilson Sales – UT/S. ID
801-292-4867 | 16 Pioneer Sales Group – MN/ND/SD
763-546-6880 | 24 E.F. Lombardi – NC/SC
704-227-2890 | 33 Ascend Sales & Mktg. – Metro NYC/N. NJ
908-320-0333 |
| 9 Desert Sales – AZ
602-268-7008 | 17 Engineered Rep. Inc. – WI
920-751-3922 | 25 Electrical Sales Assoc. – TN
615-242-2774 | 35 RD Wright – NY North of Westchester
518-966-5980 |
| 10A CT Lighting and Controls – CO/WY
303-762-3537 | 18 Archibald & Meek – IL
630-833-7377 | 26A Riffle & Associate – OH
N. OH - 440-543-8257
S. OH - 513-771-0002 | 36 Lighting for Distributors - LFD Solutions
MA/RI/VT/CT/ME/NH
401-323-3467 |
| 10B Concordia LED – MT
406-899-6073 | | 26B LP Chick – KY
502-964-8181 | 37 Pacific Rim Connections – HI
808-847-0007 |



- | | |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| 1 Alliance Marketing LTD
British Columbia
604-205-5284 | 4 Electrical Sales Network
Ontario
905-795-2525 |
| 2 ElectrixWest Agencies, LTD
Calgary - 403-256-8649
Edmonton - 780-628-5201 | 5 Agence Ricard
Quebec
514-910-8240 |
| 3 Industrial Solutions Network
Saskatchewan/Manitoba
306-242-2599 | 6 Focus Electrical Sales
New Brunswick/Newfoundland
Prince Edward Island
506-852-9333 |

Powering the Switch to LED

Distributed By



LIGHT EFFICIENT DESIGN

Corporate Headquarters • Cary, IL | Innovation & Manufacturing Center • Middleton, MA
847.380.3540 • led-llc.com | sales@led-llc.com