

LM-79-08 Test Report

For

LIGHT EFFICIENT DESIGN, LLC

(Brand Name: LIGHT EFFICIENT DESIGN)

188 S.Northwest Highway, Cary, IL60013, USA

LED Luminaires

Model name(s): LED-8091M40

Representative (Tested) Model: LED-8091M40

Model Different: N/A

Test & Report By:

Ferrum Li

Engineer: Ferrum Li

Date: May.13,2020

Review By:

Garman Mo

Manager: Garman Mo


Note: 1.The results contained in this report pertain only to the tested samples.

2.This report does not imply product certification, approval, or endorsement by A2LA, or any agency of the Federal Government.

1.1 Product Information:

| | | |
|---|--------------------------------------|-----|
| Organization Name | LIGHT EFFICIENT DESIGN, LLC | |
| Brand Name | LIGHT EFFICIENT DESIGN | |
| Model Number | LED-8091M40 | |
| SKU (if available) | N/A | |
| Type of Luminaire (for integral lamps, list base type and lamp type) | LED Luminaires | |
| Rated Voltage / Frequency | 120-277Vac, 50/60Hz | |
| Nominal Power | 320W | |
| Rated Initial Lamp Lumen | -- | |
| Declared CCT | 4000K | |
| LED Manufacturer | Seoul Semiconductor Co., LTD | |
| LED Model | 4000K:S1WM-5050408018-00000000-00001 | |
| Sample Number | JBE190810-H-B1(4000K) | |
| Luminaire Aperture (for downlights) | -- | in. |
| Luminaire Length | -- | mm |
| Luminaires Width | -- | mm |
| Number of Units (modular products) | N/A | s |

Photo

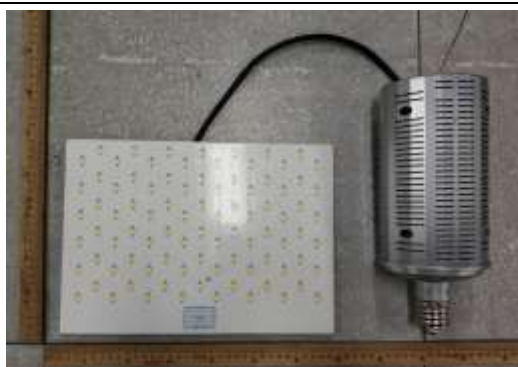

1.2 Test Specifications:

| | |
|--------------------|--|
| Date of Receipt | Apr.19,2020 |
| Date of Test | Apr.20,2020 |
| Test item | <ol style="list-style-type: none"> 1. Total Luminous Flux 2. Luminous Distribution Intensity 3. Luminous Efficacy 4. Correlated Color Temperature 5. Color Rendering Index 6. Chromaticity Coordinate 7. Electrical Parameters |
| Reference Standard | <ol style="list-style-type: none"> 1. IES LM-79-2008 Electrical and Photometric Measurements of Solid-State Lighting Products 2. ANSI C78.377-2008 Specifications for the Chromaticity of Solid State Lighting Products 3. CIE 13.3-1995 Method of Measuring and Specifying Colour Rendering Properties of Light Sources 4. CIE 15-2004 Technical Report Colorimetry 5. IESNA LM-16-93 Practical Guide to Colorimetry of Light Source 6. IESNA TM-16-05 Technical Memorandum on Light Emitting Diode (LED) Sources and Systems |

1.3 Test Methods**1) Photometric and Light Distribution Measurement – Goniophotometer Method:**

Photometric parameters were measured using the goniophotometer and software. The ambient temperature shall be maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$, measured at a point not more than 1 m from the sample and at the same height as the sample. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 1° vertical intervals and 22.5° horizontal intervals.

2) Chromaticity Measurement – Sphere-Spectroradiometer Method:

Chromaticity parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral power distribution taken at 5 nm intervals over the range of 380 to 780 nm.

3) Electrical Measurements:

Electrical parameters were measured using power meters incorporated in goniophotometer or sphere-spectroradiometer system. The ambient temperature surrounding the sample was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Voltage, frequency, current, power, power factor and total harmonic distortion were measured by and read from the power meter.

2.1 Electrical, Photometric and Chromaticity Measurements

| | | | |
|------------------|-------------|----------------------------|---------|
| Test date | 2020-04-20 | Test Ambient: | 25±1 °C |
| Test Orientation | As intended | Stabilization Time (min) | 60 |
| Model Number | LED-8091M40 | Total Operating Time (min) | 75 |

Electrical Measurement:

| Sample No. | Voltage (Vac) | Frequency (Hz) | Current (A) | Power (W) | Power Factor | THD % |
|----------------|---------------|----------------|-------------|-----------|--------------|-------|
| JBE190810-H-B1 | 120.0 | 60 | 2.594 | 309.5 | 0.9943 | 6.86 |
| | 277.0 | 60 | 1.164 | 293.2 | 0.9092 | 15.17 |

Chromaticity Measurement– Sphere-Spectroradiometer


Method(Self-absorption:1.0409):

| Parameter | Result | Special Color Rendering Indices | | | |
|-----------------------------|-----------------------|---------------------------------|----|-----|----|
| Test Voltage (V) | 120 | R1 | 74 | R9 | 0 |
| Frequency (Hz) | 60 | R2 | 84 | R10 | 61 |
| CCT (K) | 4098 | R3 | 90 | R11 | 71 |
| Duv | -0.0046 | R4 | 74 | R12 | 53 |
| Chromaticity (x, y) | x=0.3734 y=0.3628 | R5 | 74 | R13 | 76 |
| Chromaticity (u', v') | u'=-0.2261 v'=-0.4942 | R6 | 77 | R14 | 95 |
| Color Rendering Index (CRI) | 76.3 | R7 | 81 | R15 | 69 |
| R9 | 0 | R8 | 55 | -- | -- |

Photometric Measurement– Goniophotometer Method(Test Distance: 26.000m):

| Parameter | Result | |
|-------------------------------|--------|--------|
| Test Voltage (V) | 120 | 277 |
| Frequency (Hz) | 60 | 60 |
| Total Luminous (lm) | 43386 | 43214 |
| Luminous Efficacy (lm/W) | 140.18 | 147.39 |
| Beam Angle (°) | 113.5 | -- |
| Center Beam Candle Power (cd) | 15542 | -- |

Spectral Power Distribution & Chromaticity Diagram

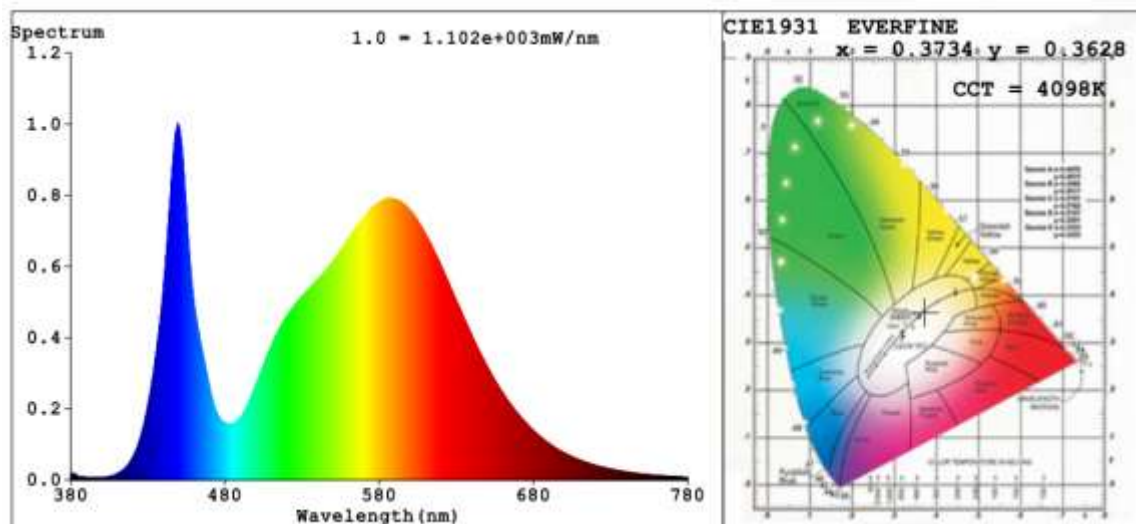

Zonal Lumen Tabulation

| Zonal Lumen Summary | | |
|---------------------|----------|-------------|
| Zone | Lumens | % Luminaire |
| 0-30 | 12,203.4 | 28.1% |
| 0-40 | 20,120.7 | 46.4% |
| 0-60 | 35,785.9 | 82.5% |
| 60-90 | 7,430.8 | 17.1% |
| 70-100 | 2,286.4 | 5.3% |
| 90-120 | 46.4 | 0.1% |
| 0-90 | 43,216.7 | 99.6% |
| 90-180 | 164.8 | 0.4% |
| 0-180 | 43,381.5 | 100% |

| Lumens Per Zone | | | | | |
|-----------------|---------|---------|---------|--------|---------|
| Zone | Lumens | % Total | Zone | Lumens | % Total |
| 0-10 | 1,472.8 | 3.4% | 90-100 | 8.1 | 0% |
| 10-20 | 4,241.1 | 9.8% | 100-110 | 15.5 | 0% |
| 20-30 | 6,489.5 | 15.0% | 110-120 | 22.8 | 0.1% |
| 30-40 | 7,917.3 | 18.3% | 120-130 | 28.4 | 0.1% |
| 40-50 | 8,286.9 | 19.1% | 130-140 | 28.0 | 0.1% |
| 50-60 | 7,378.2 | 17.0% | 140-150 | 24.8 | 0.1% |
| 60-70 | 5,152.5 | 11.9% | 150-160 | 20.4 | 0% |
| 70-80 | 2,098.7 | 4.8% | 160-170 | 12.1 | 0% |
| 80-90 | 179.6 | 0.4% | 170-180 | 4.7 | 0% |

Photometric Data

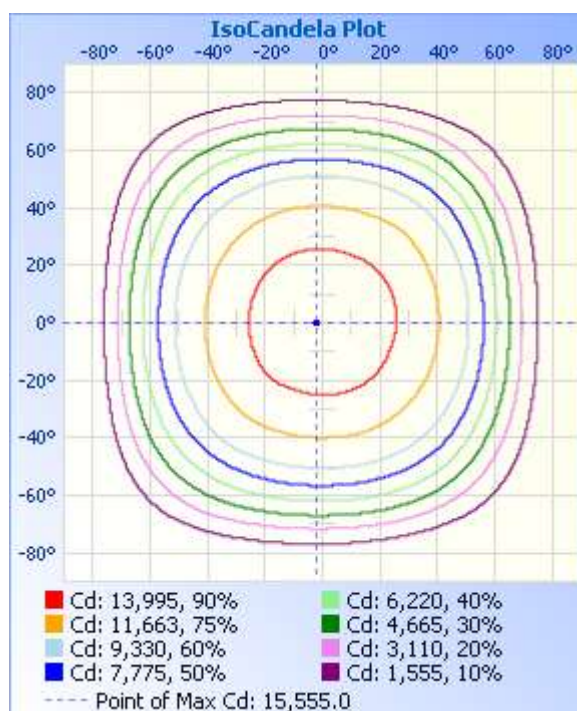
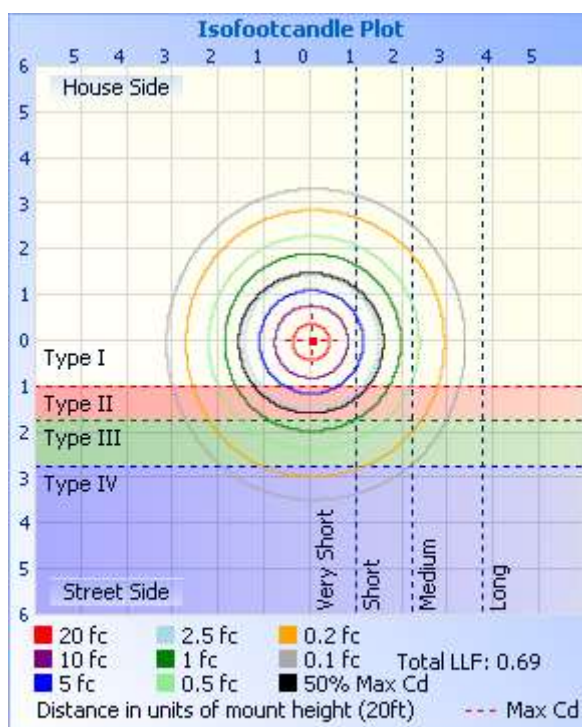
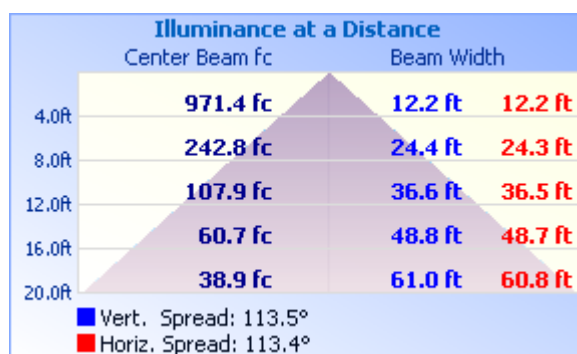
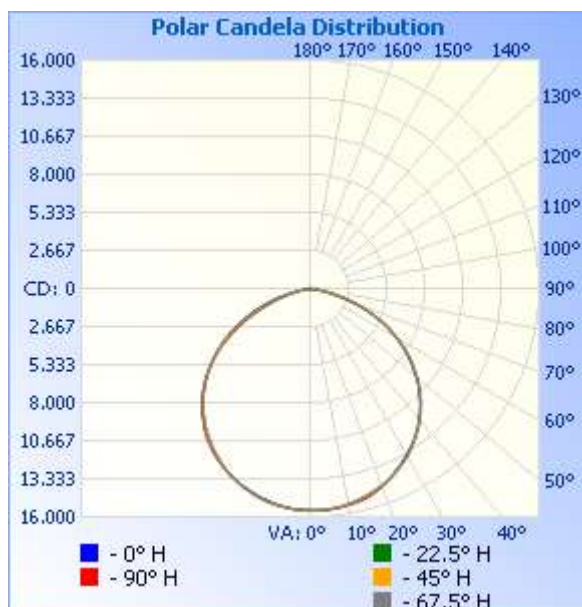


Table--1 UNIT: ×10cd

| C (DEG) □ (DEG) | 0 | 22.5 | 45 | 67.5 | 90 | 112.5 | 135 | 157.5 | 180 | 202.5 | 225 | 247.5 | 270 | 292.5 | 315 | 337.5 | |
|--------------------|------|------|------|------|------|-------|------|-------|------|-------|------|-------|------|-------|------|-------|--|
| 0 | 1554 | 1554 | 1554 | 1554 | 1554 | 1554 | 1554 | 1554 | 1554 | 1554 | 1554 | 1554 | 1554 | 1554 | 1554 | 1554 | |
| 5 | 1546 | 1547 | 1549 | 1547 | 1549 | 1550 | 1547 | 1551 | 1553 | 1551 | 1550 | 1550 | 1545 | 1547 | 1548 | 1549 | |
| 10 | 1524 | 1526 | 1531 | 1529 | 1533 | 1534 | 1534 | 1536 | 1539 | 1537 | 1535 | 1530 | 1524 | 1530 | 1529 | 1527 | |
| 15 | 1491 | 1499 | 1505 | 1501 | 1504 | 1508 | 1507 | 1507 | 1520 | 1510 | 1501 | 1497 | 1491 | 1500 | 1499 | 1495 | |
| 20 | 1453 | 1460 | 1468 | 1461 | 1465 | 1471 | 1468 | 1470 | 1476 | 1467 | 1455 | 1453 | 1450 | 1452 | 1456 | 1452 | |
| 25 | 1403 | 1412 | 1415 | 1410 | 1413 | 1421 | 1416 | 1414 | 1414 | 1411 | 1411 | 1397 | 1395 | 1398 | 1398 | 1396 | |
| 30 | 1340 | 1343 | 1347 | 1344 | 1346 | 1357 | 1355 | 1355 | 1349 | 1346 | 1348 | 1331 | 1326 | 1329 | 1328 | 1332 | |
| 35 | 1264 | 1267 | 1273 | 1266 | 1275 | 1278 | 1277 | 1277 | 1279 | 1270 | 1272 | 1254 | 1248 | 1250 | 1246 | 1257 | |
| 40 | 1171 | 1178 | 1193 | 1180 | 1187 | 1191 | 1193 | 1191 | 1192 | 1187 | 1184 | 1164 | 1156 | 1161 | 1158 | 1163 | |
| 45 | 1068 | 1070 | 1090 | 1077 | 1083 | 1092 | 1091 | 1093 | 1091 | 1085 | 1088 | 1058 | 1054 | 1055 | 1057 | 1059 | |
| 50 | 947 | 953 | 964 | 965 | 970 | 977 | 978 | 977 | 975 | 970 | 969 | 944 | 936 | 941 | 939 | 942 | |
| 55 | 800 | 813 | 832 | 837 | 841 | 852 | 852 | 852 | 852 | 843 | 837 | 818 | 809 | 811 | 808 | 801 | |
| 60 | 632 | 651 | 687 | 696 | 701 | 707 | 712 | 711 | 711 | 704 | 690 | 675 | 668 | 666 | 663 | 638 | |
| 65 | 454 | 472 | 517 | 545 | 551 | 559 | 558 | 559 | 558 | 550 | 537 | 523 | 515 | 511 | 493 | 465 | |
| 70 | 281 | 298 | 341 | 385 | 395 | 400 | 401 | 388 | 378 | 379 | 376 | 361 | 354 | 342 | 316 | 291 | |
| 75 | 143 | 153 | 179 | 221 | 238 | 243 | 237 | 208 | 195 | 197 | 202 | 200 | 199 | 180 | 155 | 144 | |
| 80 | 36.1 | 44.0 | 58.9 | 78.8 | 102 | 100 | 84.6 | 75.6 | 67.5 | 67.3 | 63.6 | 70.5 | 71.6 | 57.7 | 43.4 | 39.2 | |
| 85 | 7.07 | 7.36 | 7.51 | 7.93 | 10.7 | 11.4 | 11.0 | 11.3 | 11.5 | 10.9 | 9.54 | 7.72 | 6.30 | 6.21 | 6.47 | 6.91 | |
| 90 | 0.56 | 0.56 | 0.59 | 0.64 | 0.69 | 0.67 | 0.62 | 0.71 | 0.56 | 0.58 | 0.60 | 0.64 | 0.67 | 0.66 | 0.61 | 0.57 | |
| 95 | 0.81 | 0.78 | 0.76 | 0.74 | 0.70 | 0.67 | 0.63 | 0.62 | 0.54 | 0.59 | 0.67 | 0.72 | 0.75 | 0.73 | 0.72 | 0.67 | |
| 100 | 1.35 | 1.33 | 1.21 | 1.10 | 1.03 | 1.00 | 0.99 | 1.01 | 0.80 | 0.84 | 0.93 | 0.99 | 1.02 | 1.01 | 1.03 | 1.01 | |
| 105 | 1.96 | 1.85 | 1.73 | 1.58 | 1.38 | 1.38 | 1.49 | 1.50 | 1.16 | 1.22 | 1.33 | 1.29 | 1.28 | 1.30 | 1.42 | 1.48 | |
| 110 | 2.59 | 2.47 | 2.14 | 1.94 | 2.00 | 1.81 | 1.88 | 2.05 | 1.62 | 1.67 | 1.67 | 1.74 | 1.77 | 1.68 | 1.69 | 1.98 | |
| 115 | 3.20 | 3.02 | 2.63 | 2.17 | 2.33 | 2.05 | 2.33 | 2.59 | 2.03 | 2.11 | 2.06 | 1.97 | 2.16 | 1.91 | 2.06 | 2.39 | |
| 120 | 3.73 | 3.41 | 3.03 | 2.84 | 2.67 | 2.63 | 2.72 | 3.03 | 2.39 | 2.46 | 2.56 | 2.60 | 2.39 | 2.33 | 2.37 | 2.61 | |
| 125 | 4.21 | 3.94 | 3.20 | 3.36 | 3.53 | 3.29 | 2.88 | 3.52 | 2.70 | 2.90 | 2.75 | 3.24 | 3.40 | 2.97 | 2.39 | 2.97 | |
| 130 | 4.60 | 4.14 | 3.18 | 3.53 | 3.72 | 3.47 | 3.16 | 3.80 | 3.29 | 3.19 | 2.92 | 3.65 | 3.70 | 3.39 | 2.80 | 3.20 | |
| 135 | 4.63 | 4.13 | 3.32 | 3.69 | 3.72 | 3.71 | 3.43 | 3.80 | 3.55 | 3.32 | 3.25 | 3.80 | 3.82 | 3.46 | 3.02 | 3.41 | |
| 140 | 4.75 | 4.25 | 3.38 | 3.87 | 3.61 | 3.84 | 3.30 | 4.02 | 3.80 | 3.67 | 3.30 | 3.92 | 3.82 | 3.51 | 3.02 | 3.87 | |
| 145 | 4.93 | 4.06 | 3.72 | 4.14 | 3.89 | 4.05 | 3.27 | 4.02 | 4.13 | 3.83 | 3.52 | 4.16 | 3.62 | 3.72 | 3.46 | 3.96 | |
| 150 | 4.82 | 3.93 | 4.23 | 4.51 | 4.80 | 4.63 | 3.87 | 4.19 | 4.37 | 4.25 | 4.06 | 4.35 | 4.52 | 4.32 | 4.14 | 3.92 | |
| 155 | 4.43 | 3.86 | 4.47 | 4.95 | 5.33 | 4.90 | 4.27 | 4.35 | 4.20 | 4.40 | 3.98 | 4.40 | 4.71 | 4.73 | 4.24 | 3.81 | |
| 160 | 4.30 | 3.90 | 4.45 | 5.18 | 5.15 | 5.00 | 4.13 | 4.15 | 4.06 | 4.23 | 3.66 | 4.21 | 4.75 | 4.59 | 4.31 | 3.90 | |
| 165 | 4.40 | 3.97 | 4.48 | 4.36 | 4.61 | 4.41 | 3.93 | 3.88 | 4.01 | 3.98 | 3.45 | 4.03 | 4.11 | 4.13 | 4.08 | 3.92 | |
| 170 | 4.67 | 4.42 | 5.05 | 4.92 | 4.94 | 4.90 | 4.54 | 4.03 | 4.60 | 4.55 | 4.32 | 4.89 | 5.20 | 4.97 | 4.90 | 4.57 | |
| 175 | 4.91 | 4.84 | 5.19 | 5.08 | 5.51 | 5.12 | 4.82 | 4.23 | 4.92 | 4.90 | 4.86 | 5.06 | 5.21 | 5.57 | 4.90 | 4.81 | |
| 180 | 4.51 | 4.65 | 4.86 | 5.07 | 5.48 | 4.97 | 4.68 | 4.00 | 4.60 | 4.62 | 4.68 | 4.83 | 5.07 | 5.43 | 4.93 | 4.68 | |

3. Test Equipment

| Equipment ID | Equipment Name | Last Calibration Date | Next Calibration Date |
|---|--|---------------------------------|-----------------------|
| ST-R-423 | 2 meter Integrating Sphere | Verified by D204 standard lamp | |
| ST-R-327 | Spectral analysis system HAAS-2000 | Verified by D204 standard lamp | |
| ST-R-332 | Standard Lamp | 2019-07-09 | 2020-07-08 |
| ST-R-333 | Power Meter for Integrating Sphere | 2019-06-27 | 2020-06-26 |
| ST-R-405 | Temperature Probe for Integrating Sphere | 2020-01-23 | 2021-01-22 |
| ST-R-355 | Goniophotometer system | Verified by D908S standard lamp | |
| ST-R-359 | Standard Lamp | 2019-07-09 | 2020-07-08 |
| ST-R-358 | Power Meter for Goniophotometer | 2019-06-27 | 2020-06-26 |
| ST-R-354 | hygrothermograph for Goniophotometer | 2019-06-28 | 2020-06-27 |
| Expand Uncertainty: Photometric Measurement (Sphere):3.06%, k=2 Chromaticity Measurement(Sphere):43.46K, k=2 Photometric Measurement(Goniophotometer):3.38%, k=2 | | | |

******* END OF REPORT *******