

**LED-8024E/M 45W Post Top Retrofit**



**Models**

LED-8024E/MXX-A, 120-277VAC, cULus, 3000K, 4000K & 5700K CCT  
 LED-8024E/MXXC-A, 347VAC, cUL, 3000K, 4000K or 5700K CCT

Mogul Base Models Only  
 (See details below)




**Description**

Light Efficient Design's Post Top/Bollard retrofits replace HID lamps up to 250W HID. Advanced Active Cooling technology improves thermal performance and delivers the highest light output along with longer LED and driver life versus lamps limited to passive cooling. All models are tested by UL under 1598C that insures that retrofitted fixture retains safety certification as well as approved by UL for enclosed fixtures.

**Features**

- 45W LED Replaces 250W MH or HPS HID Lamps
- Up to 6,900 lumen output and 150 LPW efficacy
- Available in either E26 Edison or E39 Mogul screw base
- UL approved for damp environments and enclosed fixtures
- Advanced active cooling: Active cooling and dynamic temperature control
- Integrated 6kA surge
- 50,000 hour rated LED life (supported by LM80 and ISTMT reports (see website))
- 5 Year Limited Warranty - see website for details
- Insect/dust resistant housing

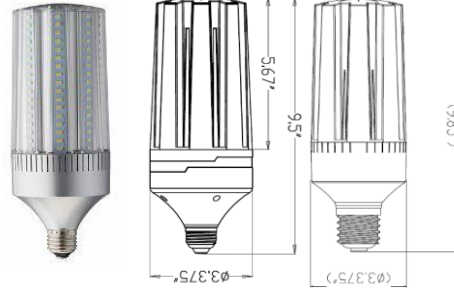

**TECHNICAL SPECIFICATIONS - USA 120-277V - ALL MODELS cULus**

MODEL	VOLTAGE	WATTAGE	LUMENS*	LPW*	REPLACES	BASE	CCT	CRI*	THD*	PF*	R9*	Duv*	LIGHT DISTRIBUTION	DIMMABLE
LED-8024E30-A	120-277V	45W	6062	130	Up to 250W HID	E26 Edison	3000K	85.4	19.79	0.9364	21	-0.0024	Omni-directional / 360°	No
LED-8024E40-A			4000K	85.1			10.06	0.963	21	-0.0015				
LED-8024E57-A			5700K	84			10.49	0.9898	19	0.0016				
LED-8024M30-A			E39 Mogul	3000K		84.1	13.1	0.9903	16	-0.003				
LED-8024M40-A				4000K		84.7	9.02	0.9684	14	0.0002				
LED-8024M57-A				5700K		84.5	11.97	0.9598	15	-0.0014				

**TECHNICAL SPECIFICATIONS - CANADA 347V - ALL MODELS cUL**

MODEL	VOLTAGE	WATTAGE	LUMENS*	LPW*	REPLACES	BASE	CCT	CRI*	THD*	PF*	R9*	Duv*	LIGHT DISTRIBUTION	DIMMABLE
LED-8024E30C-A	347V	45W	5879	132	Up to 250W HID	E26 Edison	3000K	85.5	19.6	0.9473	22	-0.0031	Omni-directional / 360°	No
LED-8024E40C-A			4000K	84.6			12.88	0.9553	14	-0.0008				
LED-8024E57C-A			5700K	85.2			16.05	0.9524	17	-0.0005				
LED-8024M30C-A			E39 Mogul	3000K		86.4	12.94	0.9474	25	-0.002				
LED-8024M40C-A				4000K		84.4	19.2	0.9512	13	0.0004				
LED-8024M57C-A				5700K		85	18.52	0.954	19	-0.0047				

**PACKAGING SPECIFICATIONS**

MODEL	PRODUCT DIMENSION	PRODUCT WEIGHT	UNIT CARTON DIMENSION	UNIT CTN WT	SHIPPER CARTON DIMENSION	SHIPPER CTN WT	CARTON QUANTITY
LED-8024E	9.6" X 3.3"	1.23 Lbs	4.9 X 4.9 X 11.5 in.	1.45 lbs.	15.6 X 15.6 X 12 in.	13.7 Lbs	9
LED-8024M	9.75" X 3.3"	1.23 Lbs	4.9 X 4.9 X 11.5 in.	1.45 lbs.	15.6 X 15.6 X 12 in.	13.9 Lbs	9

**UPC / UCC**

**DESIGN LIGHTS CONSORTIUM QPL CERTIFICATION SUMMARY (E39 MODELS ONLY)**

MODEL	PRODUCT UPC	CARTON UCC	QPL CATEGORY 1	PRODUCT CODE	FAMILY CODE	QPL CATEGORY 2	PRODUCT CODE	FAMILY CODE
LED-8024E30-A	8440060 8034 1	10 8440060 8034 8	N/A	N/A	N/A	0	0	0
LED-8024E40-A	8440060 8067 9	10 8440060 8067 6	N/A	N/A	N/A	0	0	0
LED-8024E57-A	8440060 8024 2	10 8440060 8024 9	N/A	N/A	N/A	0	0	0
LED-8024M30-A	8440060 8054 9	10 8440060 8054 6	Replacement Lamps for Outdoor Pole/Arm-mounted Decorative Luminaires (Type B)	P28JSPC3	PPPRIQ	0	0	0
LED-8024M40-A	8440060 8016 7	10 8440060 8016 4	Replacement Lamps for Outdoor Pole/Arm-mounted Decorative Luminaires (Type B)	P28JSPC3	PPPRIQ	0	0	0
LED-8024M57-A	8440060 8053 2	10 8440060 8053 9	Replacement Lamps for Outdoor Pole/Arm-mounted Decorative Luminaires (Type B)	P28JSPC3	PPPRIQ	0	0	0
LED-8024E30C-A	8440060 8077 8	10 8440060 8077 5	N/A	N/A	N/A	0	0	0
LED-8024E40C-A	8440060 8078 5	10 8440060 8078 2	N/A	N/A	N/A	0	0	0
LED-8024E57C-A	8440060 8079 2	10 8440060 8079 9	N/A	N/A	N/A	0	0	0
LED-8024M30C-A	8440060 8080 8	10 8440060 8080 5	Replacement Lamps for Outdoor Pole/Arm-mounted Decorative Luminaires (Type B)	PTUHGDC	PPPRIO	0	0	0
LED-8024M40C-A	8440060 8081 5	10 8440060 8081 2	Replacement Lamps for Outdoor Pole/Arm-mounted Decorative Luminaires (Type B)	PTUHGDC	PPPRIO	0	0	0
LED-8024M57C-A	8440060 8082 2	10 8440060 8082 9	Replacement Lamps for Outdoor Pole/Arm-mounted Decorative Luminaires (Type B)	PTUHGDC	PPPRIO	0	0	0

**ENERGY SAVING vs. HID**

**ZONAL LUMENS/ LUX DISTANCE DATA (see LM79 for more information)**

**Mounting Orientation**

LED Lamp Power (watts)	45	Zonal Lumen Summary						Mounting Orientation						
HID Lamp Power (watts)	250	Lumens Per Zone						BASE DOWN	BASE UP	HORIZONTAL				
HID Ballast Power (watts)	37.5	Zone	Lumens	% Luminaire	Zone	Lumens	% Total	Zone	Lumens	% Total	APPROVED	APPROVED	APPROVED	
Total power Savings (watts)	242.5	0-30	287.9	4.2%	0-10	21.3	0.3%	90-100	746.4	10.8%	Recommended Minimum Fixture Size	THERMAL SPECIFICATIONS		
Annual Energy Savings	\$ 136	0-40	601.2	8.7%	10-20	82.2	1.2%	100-110	694.7	10%		OPERATING TEMPERATURE	-40°F to +122°F	
Lifetime Energy Savings over 50,000 hrs)	\$ 1,334	0-60	1,619.1	23.4%	20-30	184.3	2.7%	110-120	600.9	8.7%	Width	IN-SITU TEMP MEASUREMENT/L70		
		60-90	2,148.9	31.1%	30-40	313.3	4.5%	120-130	472.3	6.8%	Height	LED TEMPERATURE*		64.2
		70-100	2,228.3	32.2%	40-50	447.0	6.5%	130-140	334.2	4.8%	Volume (Cu. In.)	L70 LED LUMEN MAINTAINANCE*		>60,000
		90-120	2,042.0	29.5%	50-60	570.9	8.3%	140-150	196.5	2.8%	* FROM ISTMT REPORT AT 77°F			
		0-90	3,768.0	54.5%	60-70	667.0	9.6%	150-160	82.0	1.2%				
		90-180	3,145.8	45.5%	70-80	727.9	10.5%	160-170	17.9	0.3%				
		0-180	6,913.9	100%	80-90	754.1	10.9%	170-180	1.0	0%				