# LED-9300 300W High Bay HID Luminaire

# LED for RETROFIT


### Models

LED-9300-50K, 120-277 VAC, cULus, 5000K


#### **Features**

- 300 Watts Replaces 1000W HID Lumaire equivalent
- 120° Beam Angle
- 120-277V UL 1993
- UL classified for damp environments (USA & Can)
- >50,000 rated LED life
- 5 year limited warranty (see website for details)
- 5000K CCT
- · Includes 6 ft wire corded whip
- · Lens covers are included

Technical Specifications  Models US/CAN  LED-9300-50K  CCT 5000K  Power Consumption 300 Watts  Replaces 1000 MH/HPS  Mounting n/a  Voltage 120-277VAC  LED Type 2835 SamSung  Beam Angle 120°  Dimmable No  Operating Temp -40°F - +122°F  Rated R70 Life Up to 50,000 Hrs.			
CCT 5000K  Power Consumption 300 Watts  Replaces 1000 MH/HPS  Mounting n/a  Voltage 120-277VAC  LED Type 2835 SamSung  Beam Angle 120°  Dimmable No  Operating Temp -40°F - +122°F  Rated R70 Life Up to 50,000 Hrs.			
Power Consumption 300 Watts  Replaces 1000 MH/HPS  Mounting n/a  Voltage 120-277VAC  LED Type 2835 SamSung  Beam Angle 120°  Dimmable No  Operating Temp -40°F - +122°F  Rated R70 Life Up to 50,000 Hrs.			
Replaces 1000 MH/HPS Mounting n/a  Voltage 120-277VAC  LED Type 2835 SamSung  Beam Angle 120°  Dimmable No  Operating Temp -40°F - +122°F  Rated R70 Life Up to 50,000 Hrs.			
Mounting n/a  Voltage 120-277VAC  LED Type 2835 SamSung  Beam Angle 120°  Dimmable No  Operating Temp -40°F - +122°F  Rated R70 Life Up to 50,000 Hrs.	300 Watts		
Voltage 120-277VAC  LED Type 2835 SamSung  Beam Angle 120°  Dimmable No  Operating Temp -40°F - +122°F  Rated R70 Life Up to 50,000 Hrs.	1000 MH/HPS		
LED Type 2835 SamSung  Beam Angle 120°  Dimmable No  Operating Temp -40°F - +122°F  Rated R70 Life Up to 50,000 Hrs.			
Beam Angle 120°  Dimmable No  Operating Temp -40°F - +122°F  Rated R70 Life Up to 50,000 Hrs.	120-277VAC		
Dimmable No Operating Temp -40°F - +122°F Rated R70 Life Up to 50,000 Hrs.	2835 SamSung		
Operating Temp -40°F - +122°F  Rated R70 Life Up to 50,000 Hrs.	120°		
Rated R70 Life Up to 50,000 Hrs.			
Wangaria de	Up to 50,000 Hrs.		
Warranty 5 Year Limited*	5 Year Limited*		
LM79 Specifications Yes	Yes		
Power (W) 306.5	306.5		
CCT 3474			
Light Output 38303	38303		
Efficacy 125	125		
THD @ 277V 14.85	14.85		
PF @ 277V 0.98	0.98		
CRI: 83.9			
R9 11	11		
Duv -0.0007	-0.0007		
Packaging Master/ 1			
Unit 51 X 27 X 3			
Master 51 X 27 X 3	ТВО		

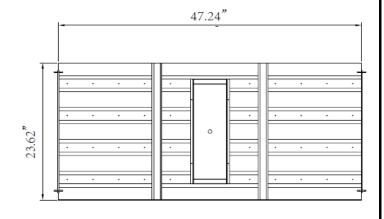

## **Lux Distance Curve**

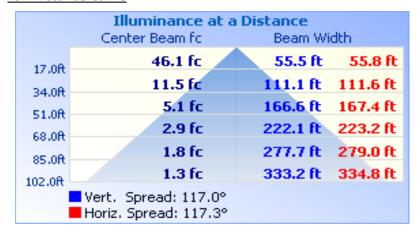

# LED-9300-50K

•	LED Power Consumption (Watts)	HID Power Consumption (Watts)	HID Ballast Power Consumption (Watts)	Total Savings (Watts)	Annual Energy Savings (14 hrs/day)	Lifetime Energy Savings (over 50,000 hrs)
	300	1000	150	850	\$478	\$4,675.00

2000	MODEL	DLC CODE					
	LED-9300-50K	P6YVSF7J					
VISTED	Approved Categories:						
High-Bay Luminaires for Commercial and							
Industrial Buildings							





