



# LIVC G2 LED LINEAR STAIRWELL, STRIP & VANITY FIXTURE



## linear lighting flexibility



beautiful uniform illumination

extra wide 6" width to cover old footprint

flex<sup>®</sup>COLOR<sup>®</sup> + flex<sup>®</sup>WATT

Eliminate ordering & stocking multiple wattages & color temps! 12 SKUs in 1. Can be in-field configured to 4 wattages & 3 color temps

flex<sup>®</sup>CONTROL


Order without controls (control ready), or basic control (integrated bi-level energy saving sensor) or advanced Lutron/LG control

flex<sup>®</sup>FIXTURE

Use this fixture in so many places! Multiple end cap trims available allow LIVC G2 to be used as stairwell, vanity & continuous run fixture



**SECURITY END CAP**  
White metal end cap transforms LIVC into vandal & tamper resistant fixture



**MODERN1 END CAP**  
Single bar brushed-nickel metal end cap creates a premium elegant look



**MODERN2 END CAP**  
Double bar brushed-nickel metal end cap creates a premium elegant look

### DEFAULT CONFIGURATIONS

PART #	UPC	WATTAGE	LUMENS	LPW	CCT (K)	STAIRWELL DLC PRODUCT CODE	LINEAR AMBIENT DLC PRODUCT CODE
RPT-P-LIVC-G2-2FT-20L-840-FWFC-R-S1	844006010911	10/15/20/30	1240-3750	122-133	3000/3500/4000	PNUZLQCS	PK60JZZJ
RPT-P-LIVC-G2-2FT-20L-840-FWFC-OCC-R-S1	844006010942	10/15/20/30	1240-3750	122-133	3000/3500/4000	PNUZLQCS	PK60JZZJ
RPT-P-LIVC-G2-3FT-20L-840-FWFC-R-S1	844006010928	10/15/20/30	1240-3750	122-133	3000/3500/4000	P0CVHIFA	PGQR1B2
RPT-P-LIVC-G2-3FT-20L-840-FWFC-OCC-R-S1	844006010959	10/15/20/30	1240-3750	122-133	3000/3500/4000	P0CVHIFA	PGQR1B2
RPT-P-LIVC-G2-4FT-20L-840-FWFC-R-S1	844006010935	10/15/30/40	1365-5120	123-135	3000/3500/4000	P5QTN26X	PTFYNNUJ
RPT-P-LIVC-G2-4FT-20L-840-FWFC-OCC-R-S1	844006010966	10/15/30/40	1365-5120	123-135	3000/3500/4000	P5QTN26X	PTFYNNUJ

Default settings are above. See page 2 for additional lumen packages, color temperatures and options.



# LIVC G2 LED LINEAR STAIRWELL & CORRIDOR FIXTURE



## PART NUMBER BUILDER

MFR	CLASS	PRODUCT	GEN	SIZE	WATTAGE	COLOR	FUNCTION	OPTIONS	REF	BAA
RPT	P	LIVC	G2				FWFC		R-S1	

Default setting shown in bold

2FT →	15L, 20L, 30L, 40L	830=3000K/85CRI
3FT →	15L, 20L, 30L, 40L	835=3500K/85CRI
4FT →	15L, 20L, 40L, 50L	840=4000K/85CRI

FWFC = FlexWatt + FlexColor

OCC = high/low motion sensor  
 EMG = 120min emg battery backup  
 Contact us for advanced wireless contol ordering codes

BLANK = NON-BAA  
 BAA = BAA Section 1605 Compliant



### ORDERING EXAMPLE

FIXTURE RPT-P-LIVC-G2-2FT-15L-840-FWFC-OCC-R-S1

**DEFAULT LUMEN PACKAGE (WATTAGE AND CCT) ARE SHOWN BELOW IN BOLD.** There are two ways to achieve a non-default lumen package and/or CCT -

1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. 2. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.

## ORDERING GUIDE

	PART #	UPC	WATTAGE	LUMENS	LPW	CCT (K)	STAIRWELL DLC PRODUCT CODE	LINEAR AMBIENT DLC PRODUCT CODE
2FT	RPT-P-LIVC-G2-2FT-15L-830-FWFC-R-S1		10W	1267	127	3000	PV7EH6YP	PR32SWHQ
	RPT-P-LIVC-G2-2FT-15L-835-FWFC-R-S1		10W	1260	126	3500	PV7EH6YP	PR32SWHQ
	RPT-P-LIVC-G2-2FT-15L-840-FWFC-R-S1		10W	1290	129	4000	PV7EH6YP	PR32SWHQ
	RPT-P-LIVC-G2-2FT-20L-830-FWFC-R-S1		15W	1929	129	3000	PNUZLQCS	PK60JZZJ
	RPT-P-LIVC-G2-2FT-20L-835-FWFC-R-S1		15W	1968	131	3500	PNUZLQCS	PK60JZZJ
	<b>RPT-P-LIVC-G2-2FT-20L-840-FWFC-R-S1</b>	<b>844006010911</b>	<b>15W</b>	<b>1994</b>	<b>133</b>	<b>4000</b>	PNUZLQCS	PK60JZZJ
	<b>RPT-P-LIVC-G2-2FT-20L-840-FWFC-OCC-R-S1</b>	<b>844006010942</b>	<b>15W</b>	<b>1994</b>	<b>133</b>	<b>4000</b>	PNUZLQCS	PK60JZZJ
	RPT-P-LIVC-G2-2FT-30L-830-FWFC-R-S1		20W	2572	129	3000	PEPNRUFM	P8GUA4BX
	RPT-P-LIVC-G2-2FT-30L-835-FWFC-R-S1		20W	2624	131	3500	PEPNRUFM	P8GUA4BX
	RPT-P-LIVC-G2-2FT-30L-840-FWFC-R-S1		20W	2659	133	4000	PEPNRUFM	P8GUA4BX
	RPT-P-LIVC-G2-2FT-40L-830-FWFC-R-S1		30W	3806	127	3000	PW0OR59A	P9WFSAH9
	RPT-P-LIVC-G2-2FT-40L-835-FWFC-R-S1		30W	4057	135	3500	PW0OR59A	P9WFSAH9
RPT-P-LIVC-G2-2FT-40L-840-FWFC-R-S1		30W	4099	137	4000	PW0OR59A	P9WFSAH9	
3FT	RPT-P-LIVC-G2-3FT-15L-830-FWFC-R-S1		10W	1267	127	3000	PWJJ0ZQ3	PLPHUGT0
	RPT-P-LIVC-G2-3FT-15L-835-FWFC-R-S1		10W	1260	126	3500	PWJJ0ZQ3	PLPHUGT0
	RPT-P-LIVC-G2-3FT-15L-840-FWFC-R-S1		10W	1290	129	4000	PWJJ0ZQ3	PLPHUGT0
	RPT-P-LIVC-G2-3FT-20L-830-FWFC-R-S1		15W	1929	129	3000	P0CVHIFA	PGQRP1B2
	RPT-P-LIVC-G2-3FT-20L-835-FWFC-R-S1		15W	1968	131	3500	P0CVHIFA	PGQRP1B2
	<b>RPT-P-LIVC-G2-3FT-20L-840-FWFC-R-S1</b>	<b>844006010928</b>	<b>15W</b>	<b>1994</b>	<b>133</b>	<b>4000</b>	P0CVHIFA	PGQRP1B2
	<b>RPT-P-LIVC-G2-3FT-20L-840-FWFC-OCC-R-S1</b>	<b>844006010959</b>	<b>15W</b>	<b>1994</b>	<b>133</b>	<b>4000</b>	P0CVHIFA	PGQRP1B2
	RPT-P-LIVC-G2-3FT-30L-830-FWFC-R-S1		20W	2572	129	3000	P0V2UXXL	PMCLBDQQ
	RPT-P-LIVC-G2-3FT-30L-835-FWFC-R-S1		20W	2624	131	3500	P0V2UXXL	PMCLBDQQ
	RPT-P-LIVC-G2-3FT-30L-840-FWFC-R-S1		20W	2659	133	4000	P0V2UXXL	PMCLBDQQ
	RPT-P-LIVC-G2-3FT-40L-830-FWFC-R-S1		30W	3806	127	3000	PVKFU7E3	PSXYVKZU
	RPT-P-LIVC-G2-3FT-40L-835-FWFC-R-S1		30W	4057	135	3500	PVKFU7E3	PSXYVKZU
RPT-P-LIVC-G2-3FT-40L-840-FWFC-R-S1		30W	4099	137	4000	PVKFU7E3	PSXYVKZU	
4FT	RPT-P-LIVC-G2-4FT-15L-830-FWFC-R-S1		10W	1267	127	3000	PB9AW7G6	PL9KGC3Z
	RPT-P-LIVC-G2-4FT-15L-835-FWFC-R-S1		10W	1260	126	3500	PB9AW7G6	PL9KGC3Z
	RPT-P-LIVC-G2-4FT-15L-840-FWFC-R-S1		10W	1290	129	4000	PB9AW7G6	PL9KGC3Z
	RPT-P-LIVC-G2-4FT-20L-830-FWFC-R-S1		15W	1929	129	3000	P5QTN26X	PTFYNNUJ
	RPT-P-LIVC-G2-4FT-20L-835-FWFC-R-S1		15W	1968	131	3500	P5QTN26X	PTFYNNUJ
	<b>RPT-P-LIVC-G2-4FT-20L-840-FWFC-R-S1</b>	<b>84400601093</b>	<b>15W</b>	<b>1994</b>	<b>133</b>	<b>4000</b>	P5QTN26X	PTFYNNUJ
	<b>RPT-P-LIVC-G2-4FT-20L-840-FWFC-OCC-R-S1</b>	<b>844006010966</b>	<b>15W</b>	<b>1994</b>	<b>133</b>	<b>4000</b>	P5QTN26X	PTFYNNUJ
	RPT-P-LIVC-G2-4FT-40L-830-FWFC-R-S1		30W	3806	127	3000	PS354FRS	P9IB704G
	RPT-P-LIVC-G2-4FT-40L-835-FWFC-R-S1		30W	4057	135	3500	PS354FRS	P9IB704G
	RPT-P-LIVC-G2-4FT-40L-840-FWFC-R-S1		30W	4099	137	4000	PS354FRS	P9IB704G
	RPT-P-LIVC-G2-4FT-50L-830-FWFC-R-S1		40W	4909	123	3000	PR5XBIAL	PNREHV6W
	RPT-P-LIVC-G2-4FT-50L-835-FWFC-R-S1		40W	5347	134	3500	PR5XBIAL	PNREHV6W
RPT-P-LIVC-G2-4FT-50L-840-FWFC-R-S1		40W	5329	133	4000	PR5XBIAL	PNREHV6W	



# LIVC G2 LED LINEAR STAIRWELL & CORRIDOR FIXTURE



## HOW DOES IT WORK?

We custom designed our own LED driver in-house so that the driver operates at maximum efficiency at each wattage. Standard LED drivers would have reduced efficiency.


## WHAT ARE THE WATTAGE CHOICES?

The 2ft, 3ft & 4ft length fixtures all have different wattage/lumen offerings. Please reference this table and the ordering guide on the last page of the cut sheet.

FLEXWATT TURN DIAL POSITION				
LENGTH	0	1	2	3
2FT	10W (1500LM)	15W (2000LM)	20W (3000LM)	30W (4000LM)
3FT	10W (1500LM)	15W (2000LM)	20W (3000LM)	30W (4000LM)
4FT	10W (1500LM)	15W (2000LM)	30W (4000LM)	40W (5000LM)

## HOW EASY IS IT TO SET?

Simply open the fixture, and adjust the 4-position turn dial with a small, flat-head screw driver. Takes 30 seconds max. Can be "locked-out" to prevent field-adjustability if desired.

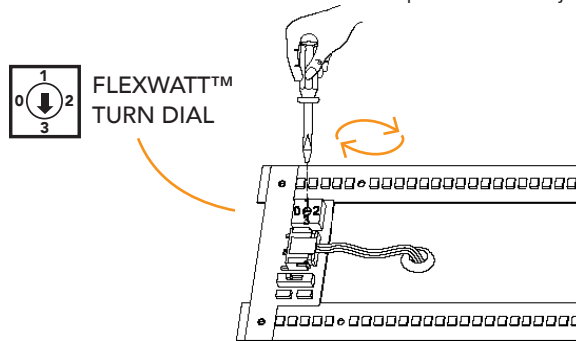

## HOW DOES IT WORK?

We select the highest efficacy, multiple color LED diodes from quality suppliers, and mount them on the same circuit board. A proprietary LED binning process ensures color consistency between fixtures. The FlexColor technology controller ensures the correct color is selected, every time.

## WHAT ARE THE COLOR CHOICES?


The 2ft, 3ft & 4ft length fixtures all have the same 3 choices for color temperature. 3000k, 3500k and 4000k. Please reference this table and the ordering guide on the last page of the cut sheet.

FLEXCOLOR SLIDE SWITCH POSITION			
LENGTH	TOP	MIDDLE	BOTTOM
2FT	3000K	3500K	4000K
3FT	3000K	3500K	4000K
4FT	3000K	3500K	4000K

## HOW EASY IS IT TO SET?

Simply open the fixture, and adjust the 3-position slide switch with your fingers. Takes 30 seconds max. Can be "locked-out" to prevent field-adjustability if desired.


## FLEXCOLOR™ SLIDE SWITCH

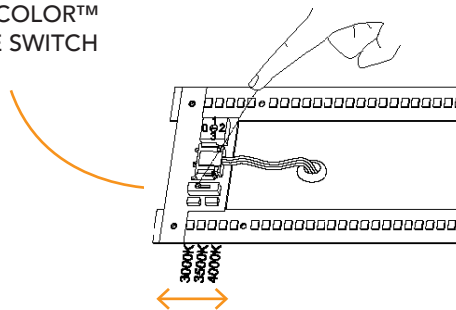

# LIVC G2 LED LINEAR STAIRWELL & CORRIDOR FIXTURE



## DIMENSIONS

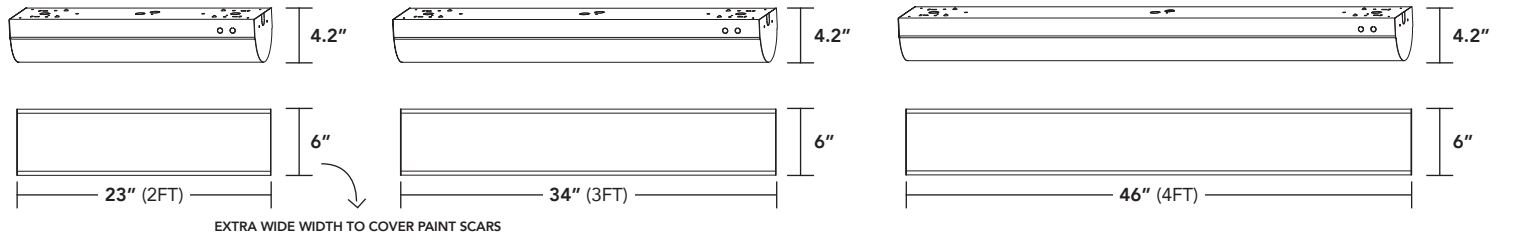

## CONTROL OPTIONS

**CONTROL READY**

All LIVC G2 models come standard as factory enabled to add controls at the factory, in the field or at a later date. Driver comes with 10V dimming and 12V DC power wiring.

**BASIC CONTROL**

Integrated high frequency, high/low motion and daylight hold-off sensor. Can be mounted behind glass or plastic lens. Default settings: SENSITIVITY: 100%, TIME DIM: 5MIN, TIME OFF = +∞ (dim but never off), PHOTOCCELL: DISABLED, DIM LEVEL: 30%. Purchase optional remote control separately to adjust settings.

**ORDERING CODES**  
 SENSOR = OCC / REMOTE CONTROL = REMOTE-IR12

**ADVANCED WIRELESS CONTROL**

We partner with Philips, Lutron and other intelligent wireless lighting control systems. Allows for occupancy sensing, daylight harvesting, grouping, scheduling, high-end trim and more. Adjust settings via iPhone/Android apps. Contact us for more details.

**CONTACT US FOR ORDERING CODES**

## ACCESSORIES

**SECURITY END CAP**  
 White metal end cap transforms LIVC into vandal & tamper resistant fixture.  
**USES** prisons, university dorms, apartment buildings

**MODERN1 END CAP**  
 Single bar brushed-nickel metal end cap creates a premium elegant look  
**USES** hotels, high-end apartments, bathroom vanity

**MODERN2 END CAP**  
 Double bar brushed-nickel metal end cap creates a premium elegant look  
**USES** hotels, high-end apartments, bathroom vanity or mount fixture vertically for a beautiful wall sconce

