




T5 RETROFITS BALLAST BYPASS - TYPE B - DOUBLE-ENDED POWER




easier to install

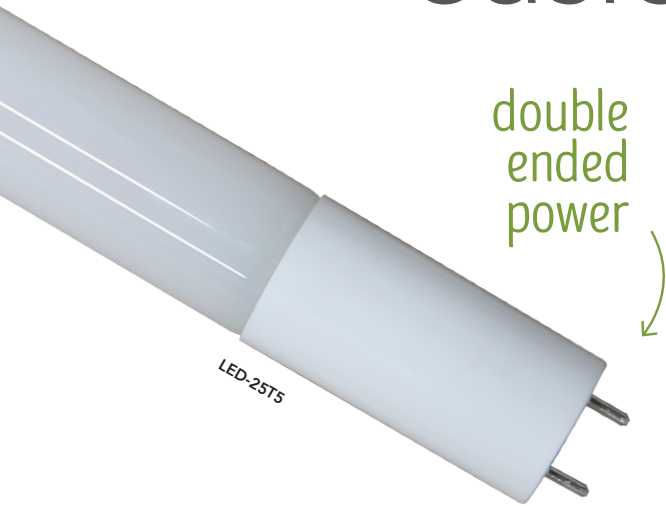

double ended power

- 25W models.
- Available in 4ft length.
- 3000K, 3500K, 4000K & 5000K color options.
- Beautiful uniform illumination from our glass construction.
- Patented integrated electrical safety switch for the safest possible double ended install.
- Frosted lens softens the light output.

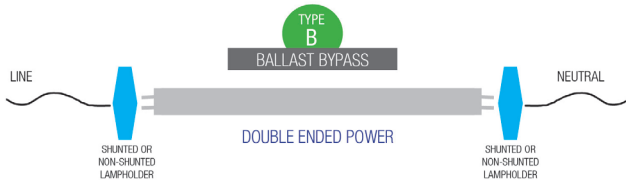

PART #	UPC	REPLACES	WATTAGE	LUMENS	CCT (K)	BASE	LENGTH	QUICK SHIP
LED-25T5HO-830DE48-G3	844006023157	54W	25W	3300	3000K	G5	4 FT	
LED-25T5HO-835DE48-G3	844006023164	54W	25W	3300	3500K	G5	4 FT	•
LED-25T5HO-840DE48-G3	844006023171	54W	25W	3500	4000K	G5	4 FT	•
LED-25T5HO-850DE48-G3	844006023188	54W	25W	3500	5000K	G5	4 FT	•


* All models intended to replace T5 fluorescent lamps of the same length.



FOR PRODUCT INFO ("LED" MODEL #) CONTACT.....Light Efficient Design • 188 S. Northwest Highway • Cary, IL 60013 • 847.380.3540 • led-llc.com
 FOR PRODUCT INFO ("RP" MODEL #) CONTACT.....RemPhos by Light Efficient Design • 30 Log Bridge Road, Building 200 • Middleton, MA 01949 • 877.997.3674 • remphos.com

02.26.19 Information is subject to change without notice.

T5 RETROFITS BALLAST BYPASS - TYPE B



PART NUMBER BUILDER

MFR	WATTAGE	PRODUCT	CCT	TECHNOLOGY	LENGTH (IN)	GENERATION
LED	25	T5HO		DE	48	G3

830=3000K/85CRI
 835=3500K/85CRI
 840=4000K/85CRI
 850=5000K/85CRI

ORDERING EXAMPLE
 LED-25T5HO-840DE48-G3

